SAMSUNG

COLOR TELEVISION RECEIVER

Chassis : L63A(P)
Model : SP61L2HX/BWT
SP61L2HX/XEC
SP50L2HX/BWT
SP43L2HX/XEE
SP43L2HX/BWT
SP43L2HX/XEG

SERVICE Manual

COLOR TELEVISION RECEIVER

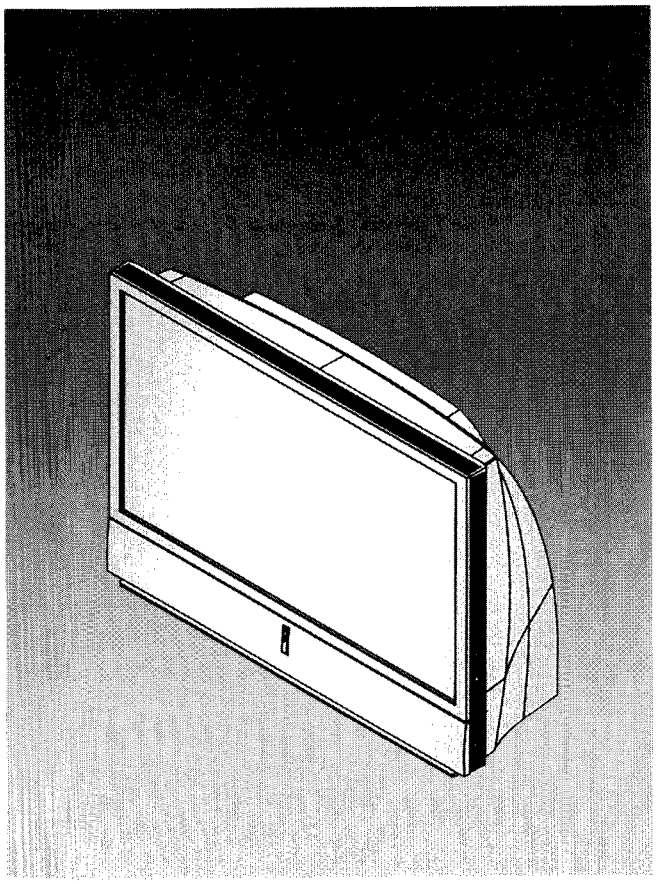

CONTENTS

1. Alignment and Adjustments
2. Exploded Views and Parts List
3. Electrical Parts List
4. PCB Diagram
5. Schematic

1. Alignment and Operation Checks

1-1 To enter the Factory mode and to select the item

1) Press the factory remote control keys in the following sequence : Display->Fcatory
2) Press the user remote control keys in the following sequence :
   (In the standby mode) Display->Menu->Mute->Power
3) Move to target item with Up/Down cursor key or Channel Up/Down key.
4) Select target item with Left/Right cursor key or Volume Up/Down key.

1. ASI500 (Main)	8. DNIe
2. ASI500 (Sub)	9. L3E7050K (Epson)
3. VPC3230 (Main)	10. M62392E
4. VPC3230 (Sub)	11. DDP1010 (DLP)
5. FLI2200	12. Test Pattern
6. AD9888	13. Option Table
7. CXA2151Q	14. Reset

[Factory Main Menu]

1-2 Image position Adjustment

1) Select L3E7050K in Factory Main Menu.
2) Horiziontal Adujustment : Use the sub item H Position (25) of L3E7050K.
   The default value is 40.
3) Vertical Adjustment : Use the sub item V Position (26) of L3E7050K.
   The default value is 17.

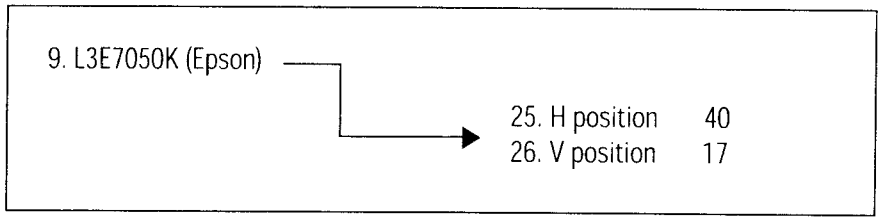

1-3 White Balance Adjustment

1) White Balance is individually adjustment per four for each different input modes; Video (RF/VIDEO/Component SD), Component HD, PC and DVI.
2) Lowlight adjustment :
   - Adjust it by changing Bright R/G/B Center value in DNIe item.
   - Generally fix Bright G Center value, and change Bright R Center and Bright B center values.
   - The Brightness of each color will get higher as the value increases.
   - The default value of Video mode is 117, while it is 128 for Component HD, PC and DVI modes.

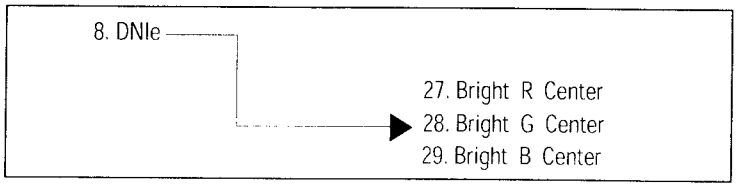

3) Highlight adjustment
- Adjust it by changing R/G/B Contrast in L3E7050K item.
- Generally, fix G Contrast value, and change R Contrast and B Contrast values.
- The gain of each color will get higher as the value increases.
- Contrast 20 will be changed by step 20, and Contrast 01 will be changed by step 1.
- The default value of Video and Component HD mode is 512, while it is 500 for PC and DVI modes.

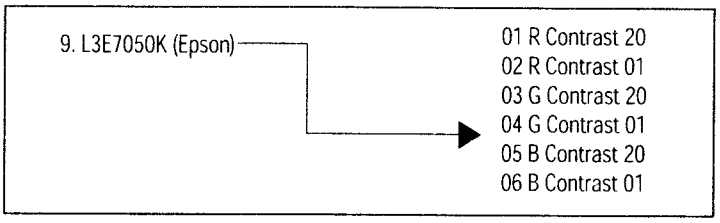

1-4. Test Patterns

The factory mode has various built-in test patterns.

Test Pattern				
01	Cross Bar	14	Dark 4%	
02	Cross Hatch	15	Step 64	
03	Checker	16	Step 32	
04	Character	17	Step 16	
05	Box	18	Step 8	
06	Single Color	19	Color Bar	
07	White 75%	20	Flicker_100	
08	White 50%	21	Flicker_75	
09	White 25%	22	Flicker_50	
10	White 10%	23	Flicker_25	
11	Dark 1%	24	Pattern Tone	3
12	Dark 1.5%	25	V_Frequency_60Hz	0
13	Dark 3%	26	OSD Mixed	0

, t[Test Pattern Menu]

1) Using method (Example: Step (18) test pattern)
- Move cursor to Step 8(18) test pattern 8 with up/down direction key or channel up/down key of transmitter.
- Activate the test pattern with left/right direction key or volume up/down key of transmitter.
- Test pattern of white, blue, red, and green will be displayed in turn with press on left/right direction key or volume up/down key.
- The display will be returned to the test pattern menu with press on up/down direction key or channel up/down key at the test pattern display status.
- The display will be returned to the main menu of the factory mode with press on menu key at the status of the test pattern display status.

2) Types of patterns

A) LCD patterns: These patterns are made from LCD driver board, which are ranged from Single Color (06)to Dart 4%(14) pattern.

- Function of Pattern Tone(24): Only available on LCD patterns
  * 1: Test pattern signal is displayed after adjusted with white balance and gamma correction.
  * 2: Test pattern signal is displayed after adjusted with gamma correction.
  * 3: Test pattern signal is displayed to LCD panel without adjustment. (Mainly used to measure optical characteristics.)
- Normal display of LCD pattern indicates at least that the status of optical engine including the LCD board is normal.

B) Scaler Patterns: These patterns are made from scaler IC on digital board which are ranged from Cross Bar(01) to Box(05) and from Step 64(15) to Flicker_25(23) pattern.
- OSD Mixed: Only available on Scaler Patterns.
  * 0: Test pattern will disappear when the display is returned to the menu at test pattern display status.
  * 1: Test pattern will be a background picture when the display is returned to menu at test pattern display status.
- Normal display of scaler patterns means at least the parts after scaler IC are normal.

1-5 M62392E LCD driver control

Item	Default	Fuction	Item	Default	Fuction
01 Vmiddle	185	Fixed	14 D->L Trans	-	Refer below
02 Vrefence	230	Fixed	15 LCD All Initial	-	Don't use
03 NRSL	103	Fixed	16 OSD Start Pos	00	Fixed
04 NRSH Red	96	Fixed	17 LCD EEP	-	Refer below
05 NRSH Green	96	Fixed	18 DIG EEP	-	Refer below
06 NRSH Blue	96	Fixed			
07 LCCOM Red	94	Red Flicker control			
08 LCCOM Gree	94	Green Flicker conrol			
09 LCCOM Blue	94	Blue Flicker control			
10 UpDown	01	Image Flip			
11 LeftRight	01	Image Flip			
12 Uniformity	00	Fixed			
13 Cremo Debug	00	Fixed			

[M62392E Menu]

1) LCD EEP &DIG EEP
- LCD board and digital board can simultaneously backup the data of gamma (uniformity) and flicker adjustment, because they have the same capacity of EEPROM.
- LCD EEP: It indicates the status of EEPROM in the LCD board.
  * Cremo: With the eguipment used during engine assembly at the factory, it indicates that the adjusted gamma and flicker data is stored.
  * Download: It indicates that the gamma and flicker data on the digital board is downloaded and stored through D->L Trans(14) operation.
    At replacement of the LCD board, 14 D->L Trans operation should be carried out.
  * Default: It indicates that the default value of Gamma and flicker data is stored.
- DIG EEP: It indicates the status of the EEPROM of the digital board.
  * Download: It indicates that the gamma and flicker data on the LCD board is downloaded and stored through factory reset operation. At replacement of the digital board, the data in EEPROM of the LCD board should be backed up to EEPROM of the new digital board by factory reset.
  * Default: It indicates that the default value of gamma and flicker data is stored.

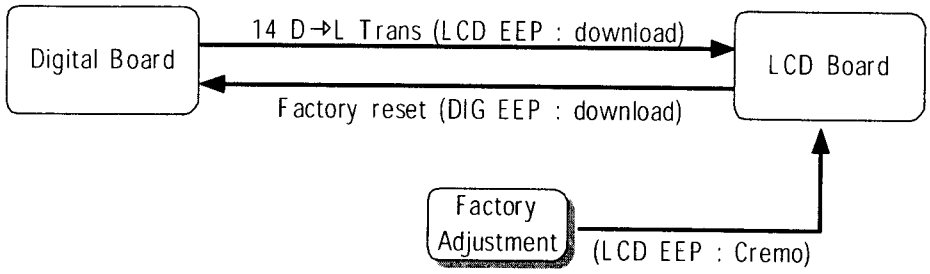

, t[EEPROM Status Diagram]

2)LCCOM (LCD COMMON VOLTAGE)
- LCCOM Red: It is used for the LCCOM adjustment of the Red panel.
  It adjusts the flicker of the Red panel.
- LCCOM Green: It is used for the LCCOM adjustment of the Green panel.
  It adjusts the flicker of the Green panel.
- LCCOM Blue: It is used for the LLCOM adjustment of the Blue panel.
  It adjusts the flicker of the Blue panel.

1-6 Flicker agjustment

* Basically, the flicker is agjusted to an optimal status during the assembly of the optical engine. In case additional adjustment is needed, please refer to the following; (ex. Blue panel)

1) Select Test Pattern item.
1) Set item OSD Mixed(26) to 1.
2) Select item Flicker_50(22) (Signal level 50%) pattern.
3) Selecting Blue color, and check the value of the flicker.
4) Press Menu key.
5) Select item M62392E(10).
6) Adjust flicker by selecting item LCCOM Blue(9).
7) Press again Menu key.
8) Select test pattern item, and return item OSD Mixed(26) to 0

1-7 Option Tables

	Item	Default (Europe)	Default (Asia)	ETC
01	Language Group	Europe	Asia	Dependent on Area
02	Language	-	-	Dependent on Nation
03	Jack Type	Scart	RCA	Scart/RCA
04	ATM/Area	ATM	Area	ATM/Area
05	CW/CS	CW	CS	
06	LNA	On	On	
07	TOP TTX	On	On	
08	TTX Group	-	-	Dependent on Area
09	TTX Contrast	3	3	
10	High Deviation	Off	Off	
11	Carrier Mute	On	On	
12	Picture Aspect	Last Memory	Last Memory	Last/Wide
13	Scart WSS	Normal	Normal	Normal/Wide/Panorama
14	Clock Display	12Hrs	12Hrs	12Hrs/24Hrs
15	AV Input	TV	TV	TV/Last memory
16	Plug & Play	On	On	
17	Pixel Number	01	01	
18	Pixel Time	01	01	
19	Melody Volume	05	05	Power on/off Melody volume
20	PAL OSD/DNIe Shift	0/0 or 0/-1	0/0 or 0/-1	Fixed
21	NT OSD Shift	0	0	Fixed
22	Auto Power	On	On	
23	Lamp Time	-	-	
24	Lamp Time Clear			
25	Pixel Shift	Off	Off	
26	DNIe Demo	On	On	
27	Arabic/Persian	-	-	OSD language selection
28	61 Inch	-	-	See 5-8. 61" Option

1-8 LED Operation

(●:On, ◑:Blinking,○: off)

TIMER	LAMP	STAND BY/TEMP	Indication
○	○	●	Standby mode.
●	○	○	A timer pilot light when Timer Auto On or is selected.
○	●	○	Normal operation
●	●	○	Normal operation(When Timer Auto On or off is selected.)
○	◑	○	Lamp is warming up. The normal picture comes on after 25 seconds.
●	◑	○	The normal picture comes on after 25 seconds.(when Timer Auto On or off is seleted.
○	◑	◑	Air vent cover in the rear of the TV is not properly installed.
○	○	◑	Inside temperature of the TV is over normal. Clean the air vent cover in the rear of the TV. Turn the TV back on after 1hour.
◑	◑	◑	The lamp does not work, please contact an authorized service center for assistance.

1-9 61" Option

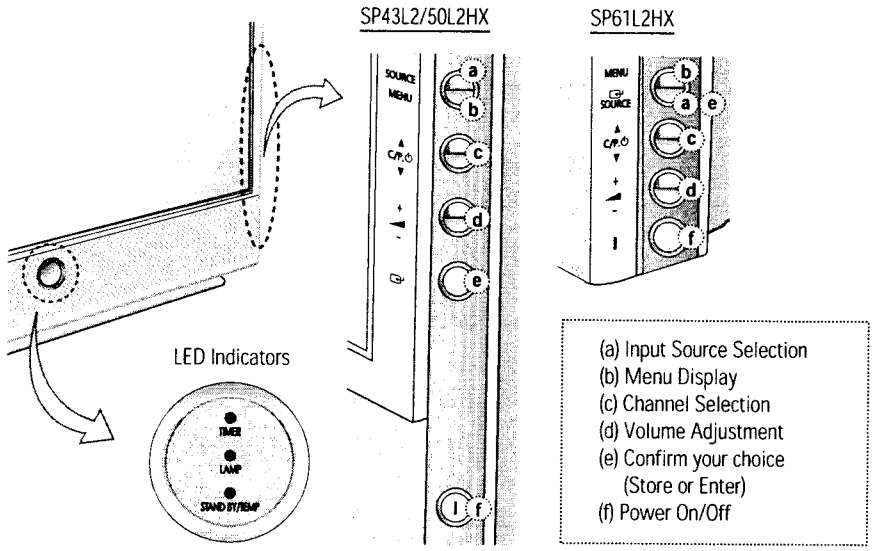

* The 61" model has no additional Enter button, and the Source button provides an Enter function as well. That is, the Source button is for Entering with at status with the OSD menu, while it is also for the Source Selection at status without OSD menu.

1-10 Lamp Time Clear

* Existing lamp time should be cleared after replacing lamp.
1) Select Option Table.
2) Run item lamp time clear(24) on the 2nd page of option table.

1-11 Display spots

1) Appearance: Some areas, lines, or points with black, cyan, yellow, magenta, etc, that is not white color are found in the white (10~100%) picture among repose pictures, and in some cases, red, green, blue color of area is appeared at black picture.

2) Types

	Appearance	Cause	Countermeasure
Screen dust	1 to 3mm diameter of surrounding boundary is seen clear at white picture, and is more of a polygon than circle. (It's the same with the shape of dust)	It is caused by dust stuck to the screen inside the set, caused by static electricity.	Remove the dust on the screen.
Engine dust	It is found well from white 40 to 80% as cyan, yellow, or magenta color etc, and has the 8 to 20mm circle of shape with unclear boundary.	A minute dust on the polarizer or panel part of the engine sticks to one channel among red, green, blue, and is displayed with its size 60 times increased. The diameter of dust stuck to a panel part is displayed a smaller while it is bigger on polarizer. Dust stuck to a panel is found red, green, blue color, etc at the same location of black picture.	1.Remove dust by discharging high pressure of air to the filter of the engine. 2.Remove dust with air pump for lens cleaning after removing cover-lens. 3.Replace engine.
Bad Mirror Shape	Water drop shape is displayed on a white picture, and its surrounding boundary is a little cloudy.	Reflection image is displayed on the screen due to light distorted by a pin hole or bad shape on the reflection side of the mirror.	Replace mirror.
Mirror or Screen contamination	Various shapes are displayed with a cloudy surrounding boundary in a white picture.	It is displayed on screen in case mirror or screen inside is contaminated.	Clean Mirror or Screen.
Bad Uniformity	The white picture is very big and black is the main color found compared to other colors.	Dust located in the engine lighting system is blocking the lighting.	Replace engine.
Contamination of transmitting Lens	A big light pink spot is found in the white picture.	It is caused by contamination due to fingerprint on the surface of the transmitting lens, etc.	Clean transmitting lens.
Bad transmitting Lens	A wave shape is found in the white picture.	It is caused by a scratch on the surface of the transmitting lens.	Replace engine.

1-12 ASSEMBLY

1-12-1 ASSY COVER P-FAN

ASSY COVER P-FAN Separation :
Remove the 3 screws securing the COVER-DUCT, TOP.

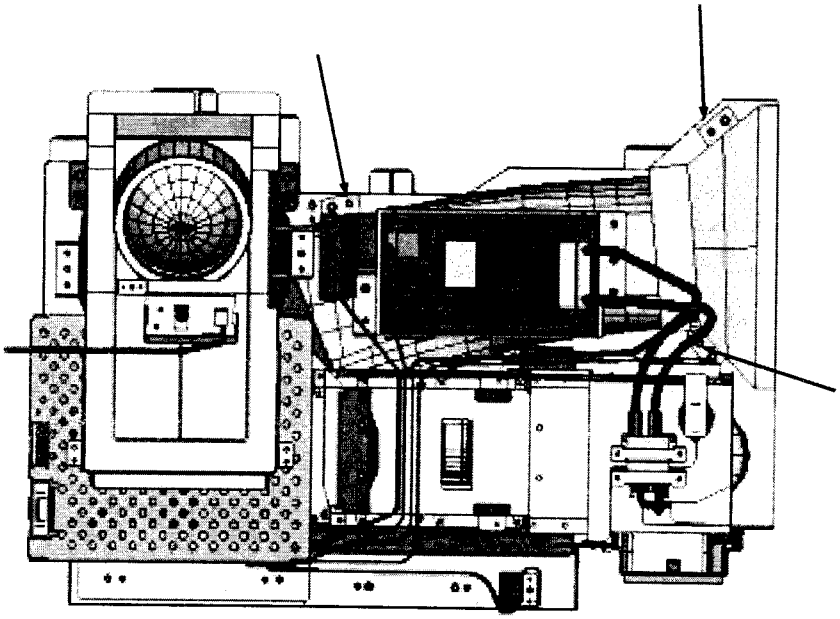

ASSY COVER P-FAN Separation :
Pull out the screws while holding and pressing on the HOOK of the HOLDER-FILTER.

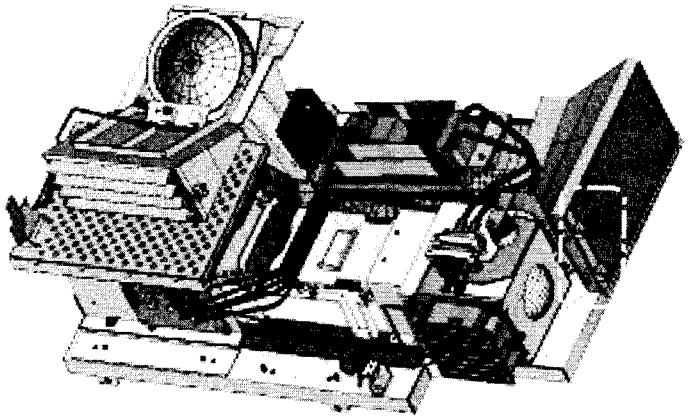

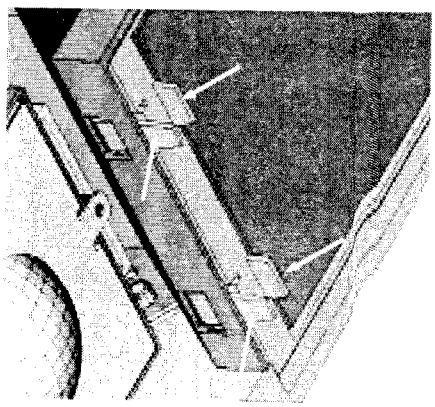

ASSY COVER P-FAN Separation :
Pull out the HANDLE-FILTER in the direction shown in the figure.

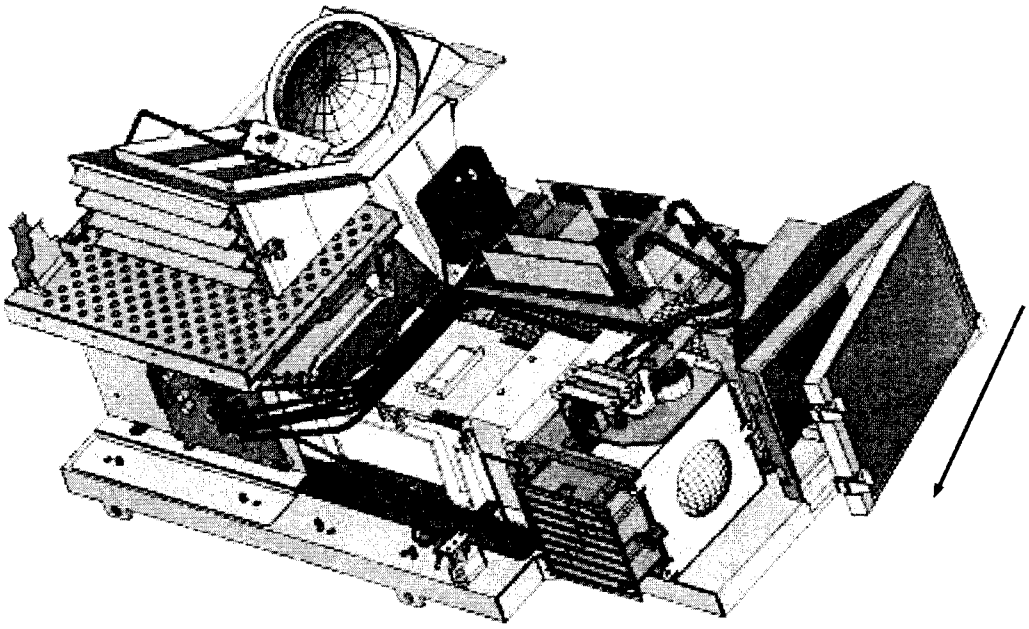

ASSY COVER P-FAN Separation :
Lift up the COVER-DUCT TOP with your hand in order to pull out the FAN.

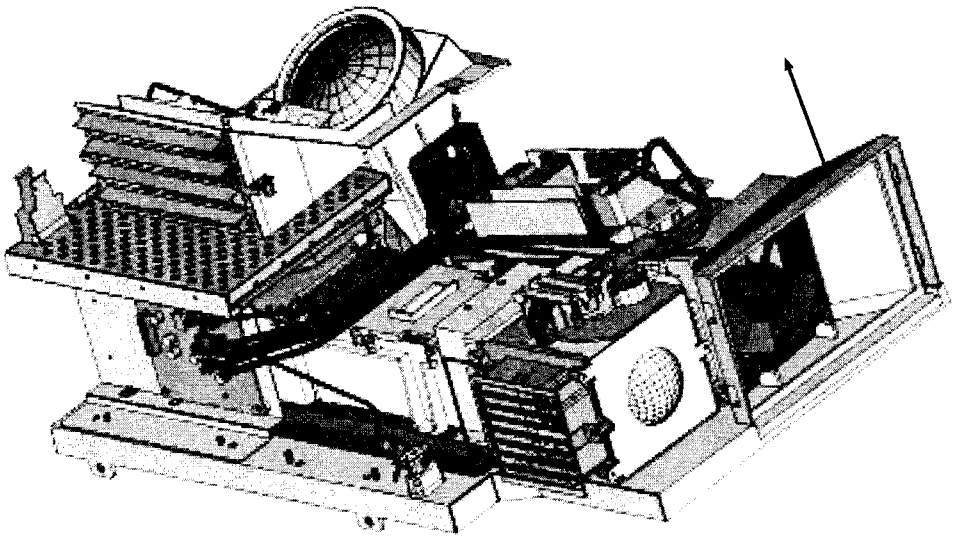

ASSY COVER P-FAN Separation :
Pull out the FAN and let go of the COVER-DUCT TOP .

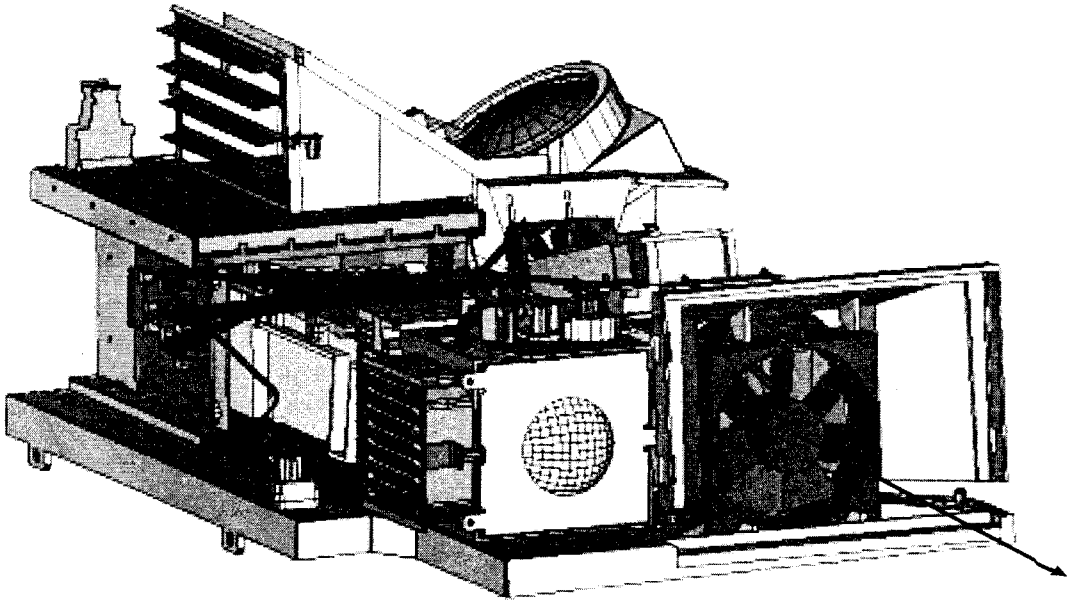

1-12-2 LAMP_BALLAST

LAMP CONNECTOR Separation :
6003-000335 SCREW-TAPTITE :RH,+2S,M3,L8,ZPC(YEL)SWRCH18A 4EA
Remove the 4 screws in order to pull out the LAMP_BALLAST CONNECTOR

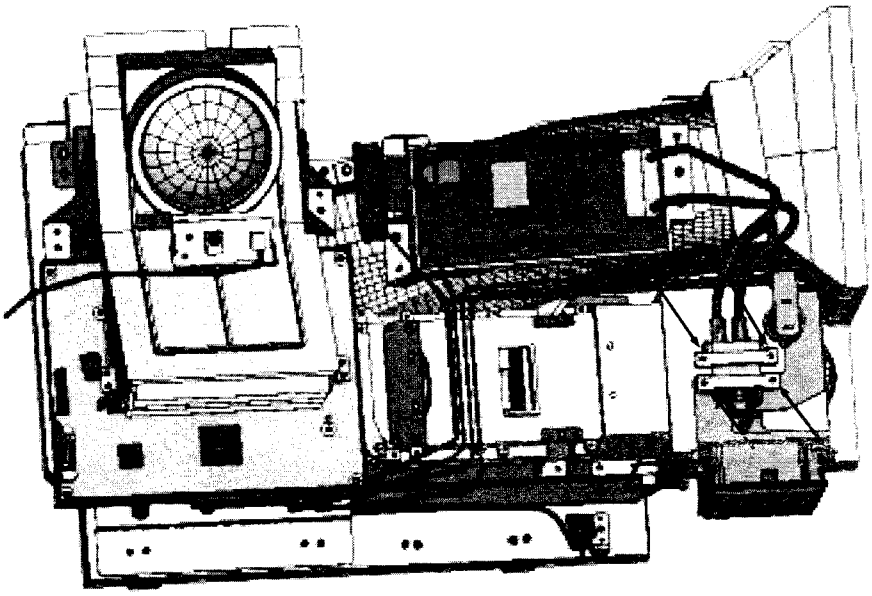

LAMP CONNECTOR Separation :
Pull out the connector connected to the LAMP-BALLAST and the LAMP (Left Figure), and lift it up to separate the two parts.(Right Figure)

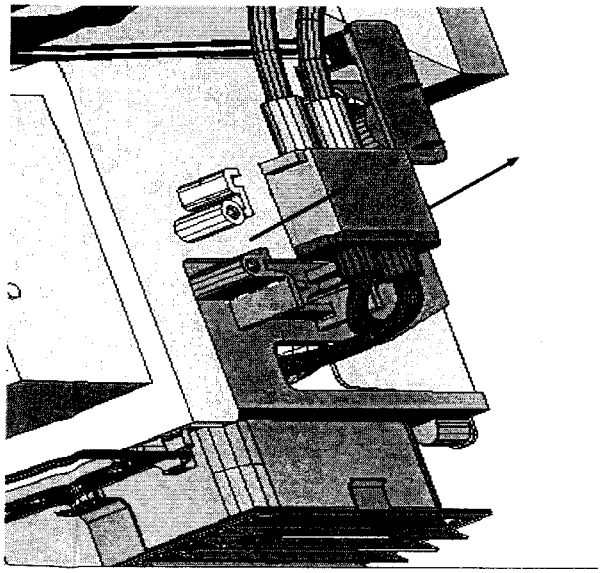

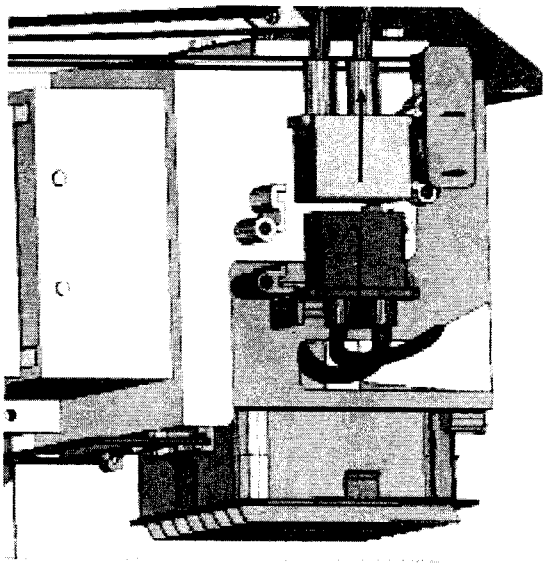

LAMP CONNECTOR Separation :
Remove the 4 screws securing the LAMP-BALLAST.
Remove the ON/OFF CABLE inserted in the LAMP-BALLAST.

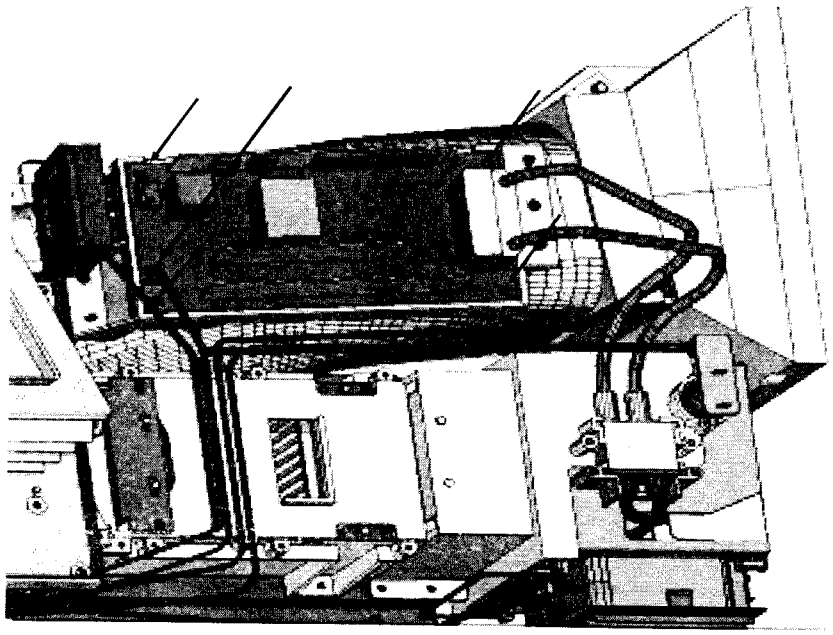

LAMP CONNECTOR Separation :
Remove the LAMP-BALLAST, and replace it.

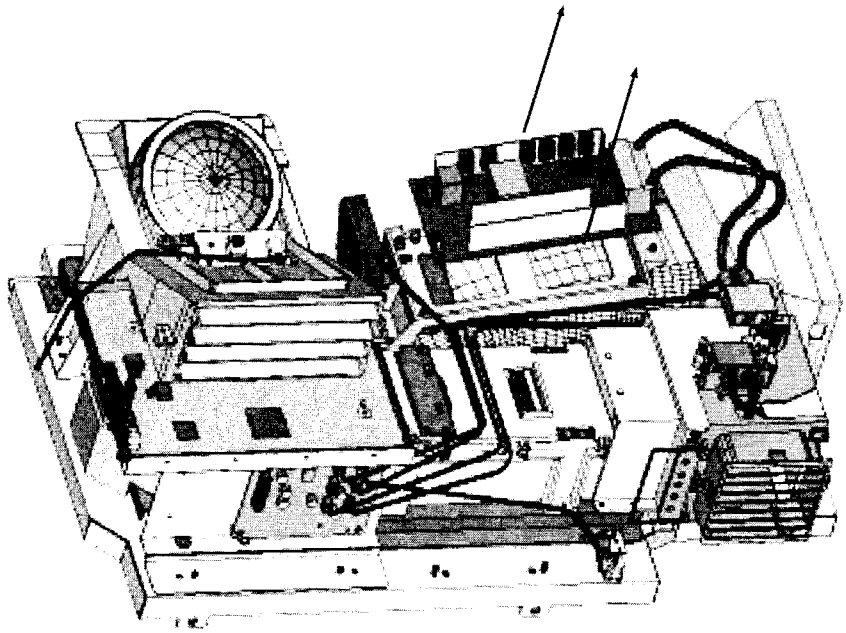

1-12-3 ASSY PCB S-LCD DRIVER

COVER-LENS Separation :
Remove the marked screws.

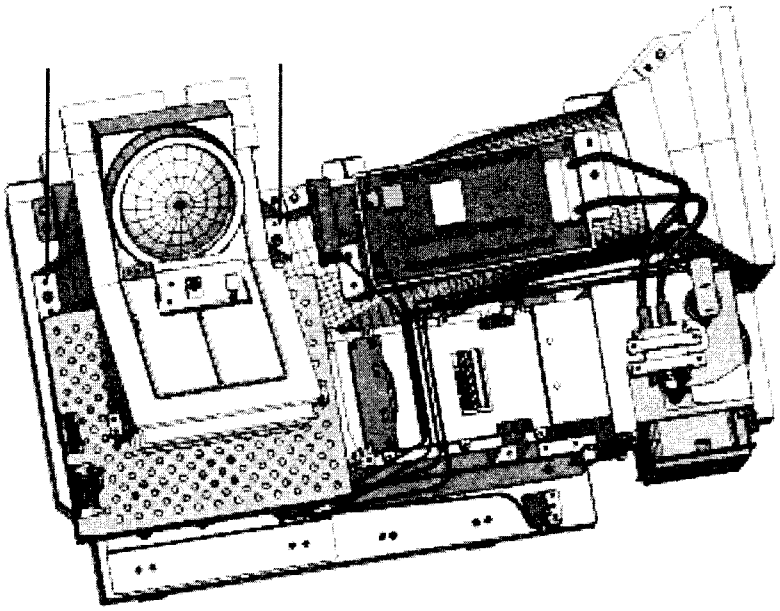

COVER-LENS Separation :
BP63-00039A COVER-LENS : HIPS VO BLACK
Pull out the COVER-LENS in upward direction as shown in the figure.

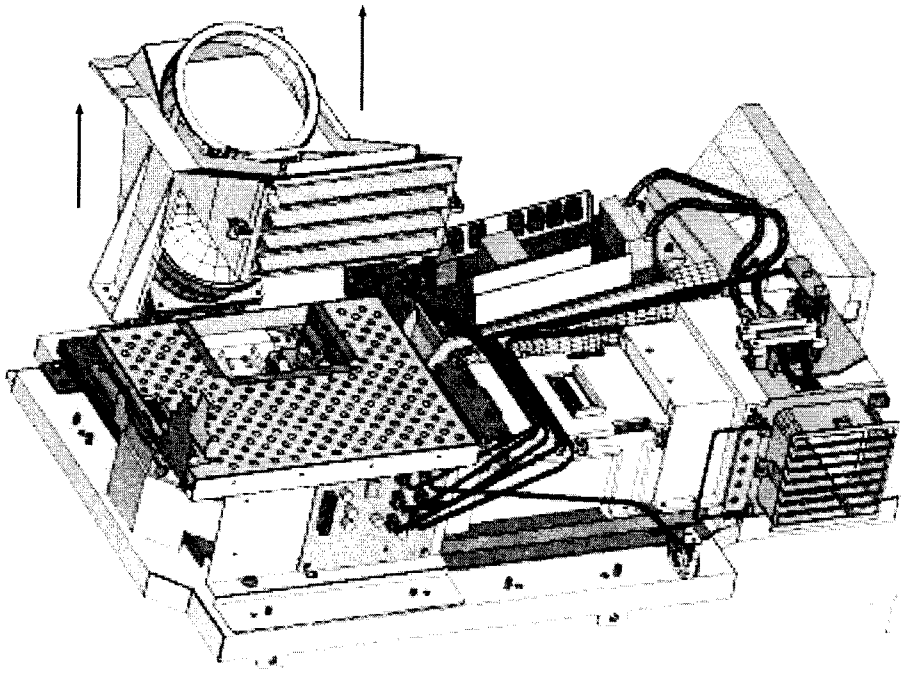

ASSY MISC P-SHIELD-CASE,TOP Separation :
6003-000335 SCREW-TAPTITE :RH,+2S,M3,L8,ZPC(YEL)SWRCH18A
Remove the 4 marked screws.

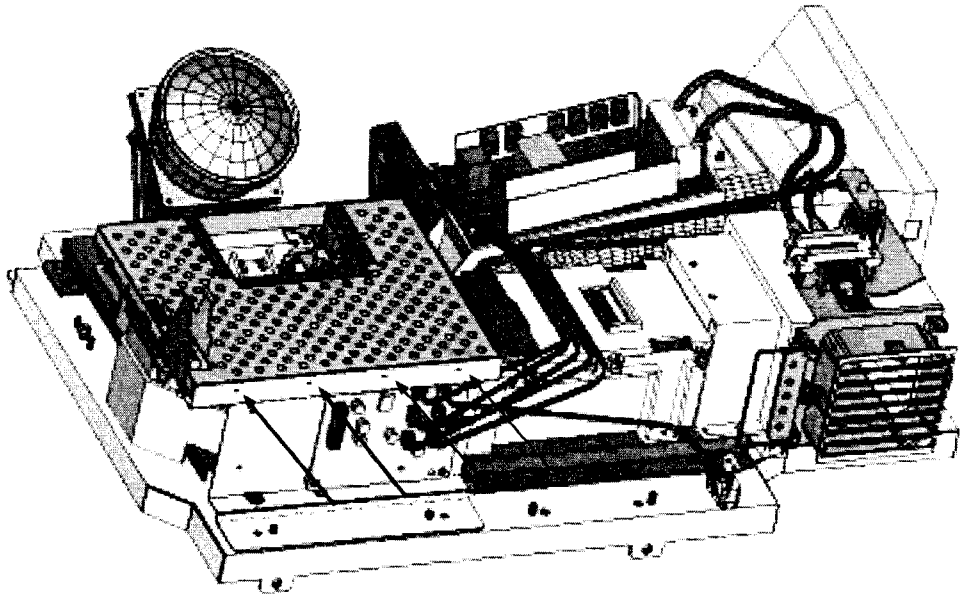

ASSY MISC P-SHIELD-CASE,TOP Separation :
ABP96-00186A SSY MISC P-SHIELD-CASE,TOP
Hold both sides of the ASSY MISC P-SHIELD-CASE TOP and pull it out in the direction of the arrow to separate it.

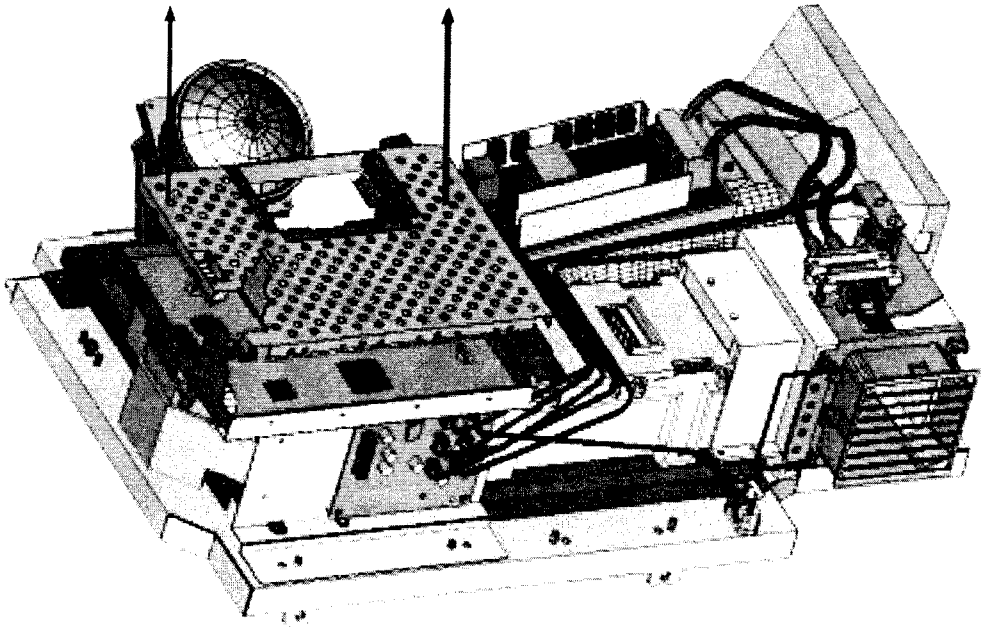

LCD-PANEL Separation :
Separate the 3 marked parts of PANEL R,G,B.
Refer to the figure for details.

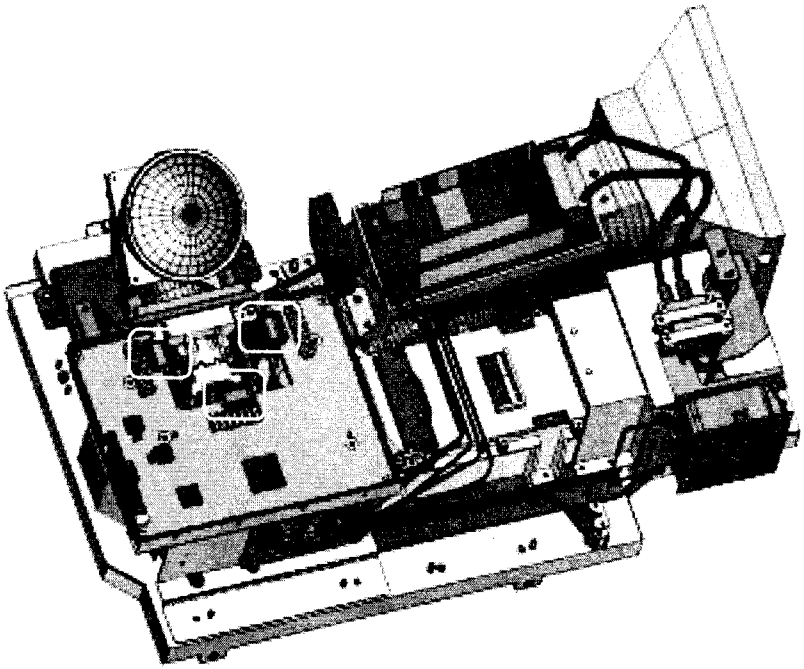

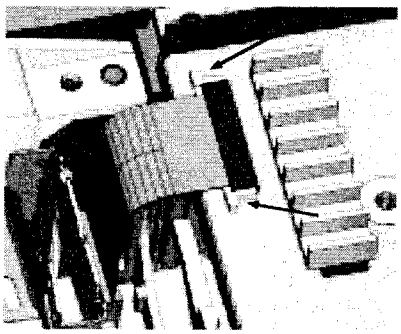

LCD PANEL Separation :
Separate each PANEL HOLDER
Refer to the figure for details.

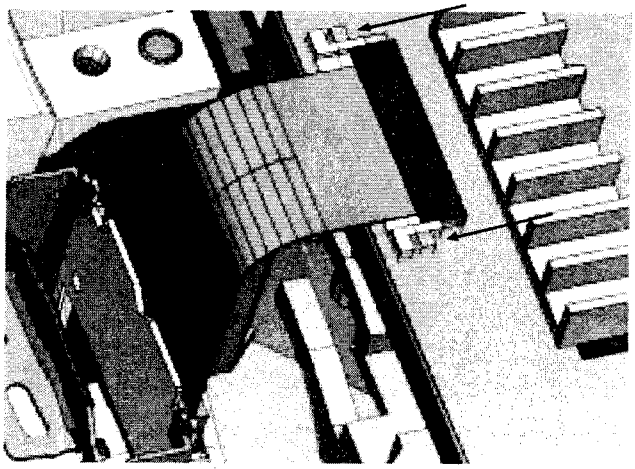

LCD PANEL Separation :
Push both sides of each PANEL HOLDER in direction of the arrow in the figure to separate it.

LCD PANEL Separation :
A figure showing three separated panels

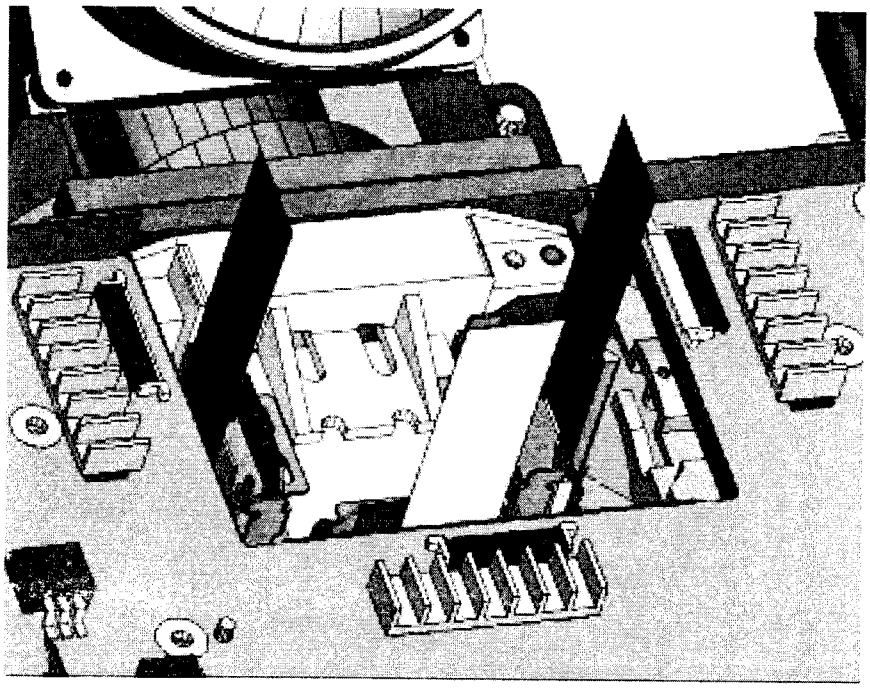

ASSY PCB S-LCD DRIVER Separation :
6003-000365 SCREW TAPTITE : BH S M3 L8 ZPC(YEL) SWRCH18A 4EA
Remove the 4 marked screws.

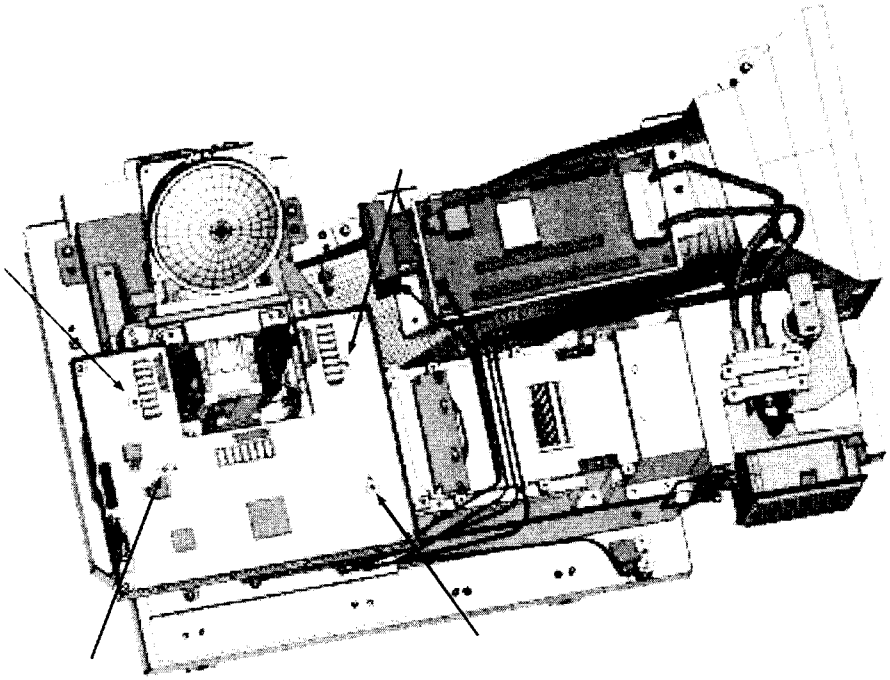

ASSY PCB S-LCD DRIVER Separation :
Hold both sides of the ASSY MISC P-SHIELD-CASE BOT and pull it out upward in the direction of arrow to separate it.

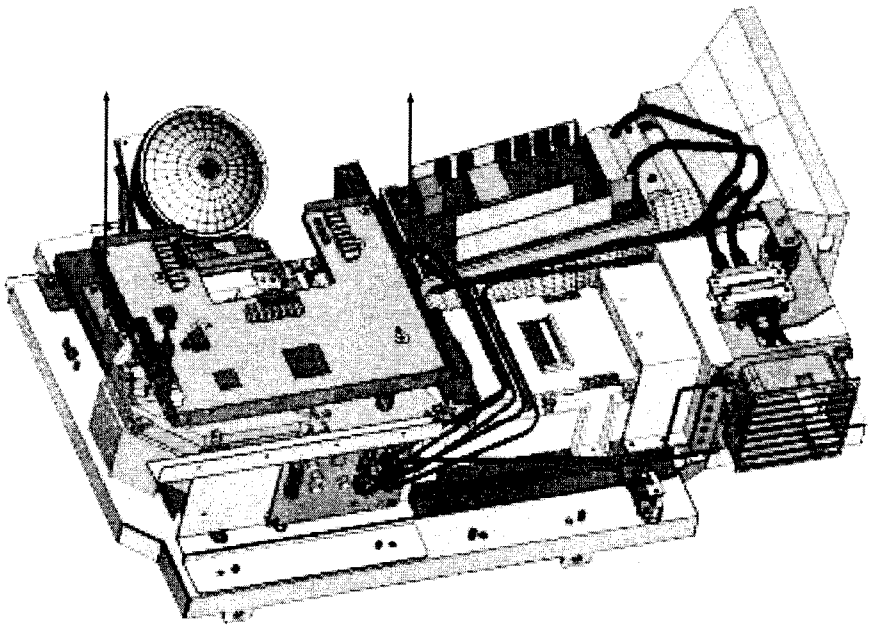

ASSY PCB S-LCD DRIVER Separation :
6003-000335 SCREW-TAPTITE :RH,+2S,M3,L8,ZPC(YEL)SWRCH18A 4EA
Remove the 4 marked screws.

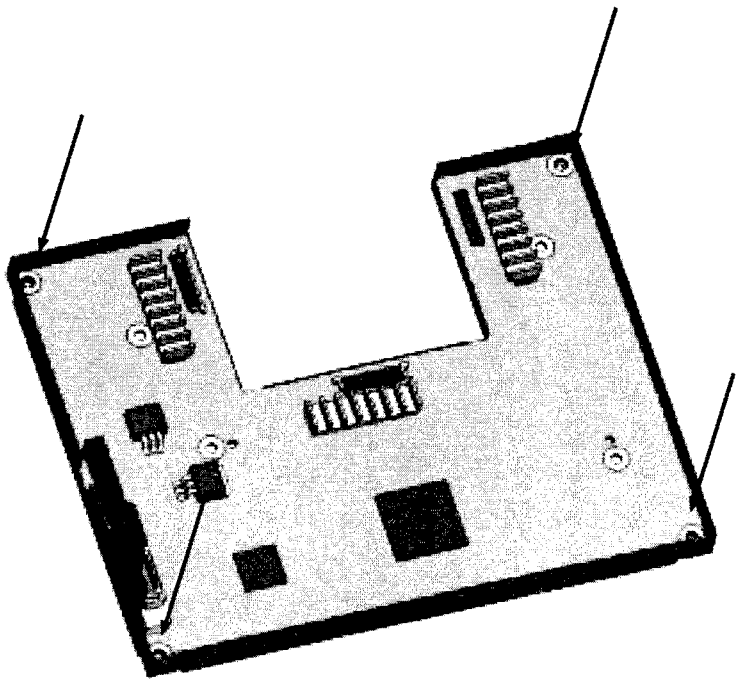

ASSY PCB S-LCD DRIVER Separation :
BP94-00474A ASSY PCB S-LCD DRIVER 1EA
Pull out the ASSY PCB S-LCD DRIVER.

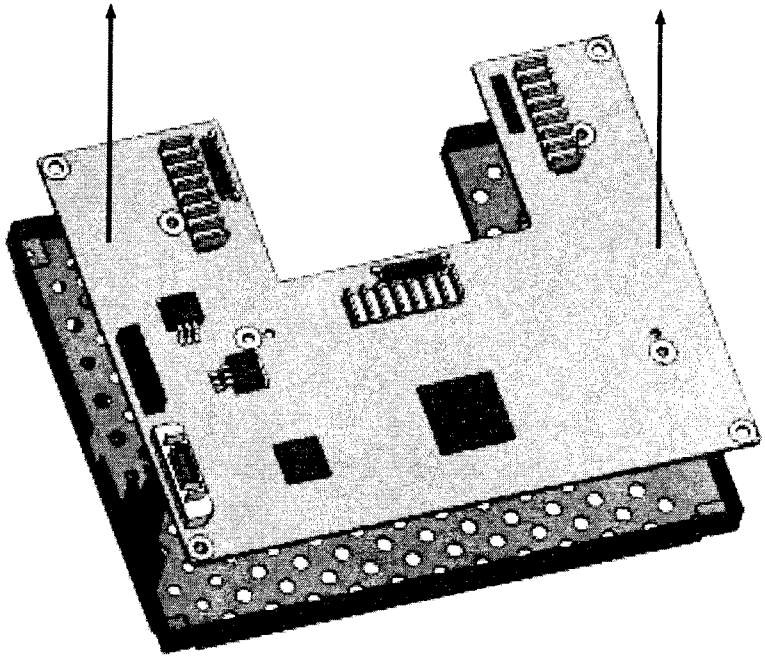

1-12-4 FAN(FAN-BALLAST)

FAN-BALLAST Separation :
Remove the 2 screws securing the HOLDER-BALLAST.

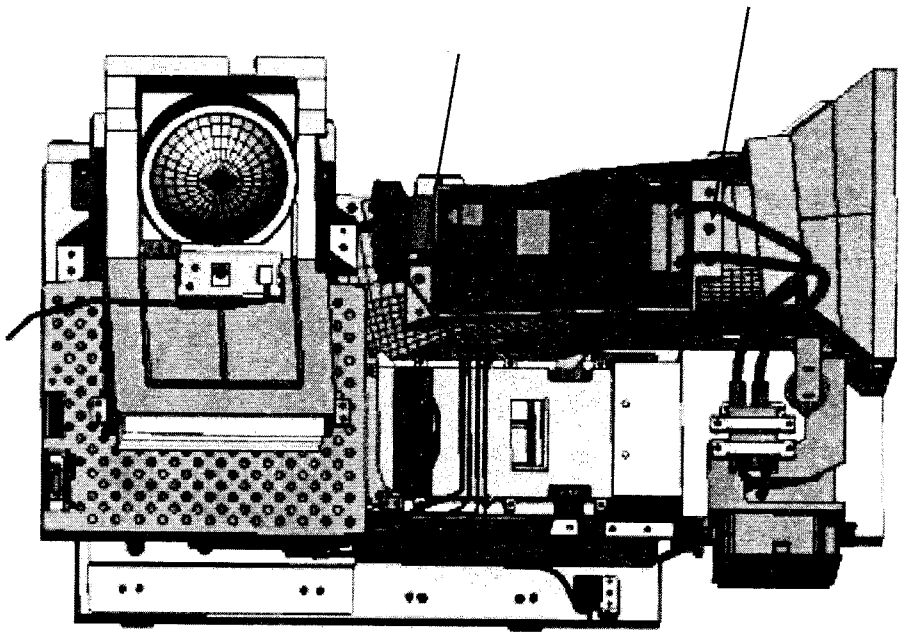

FAN-BALLAST Separation :
Pull out the ASSY BALLAST as shown in the figure.

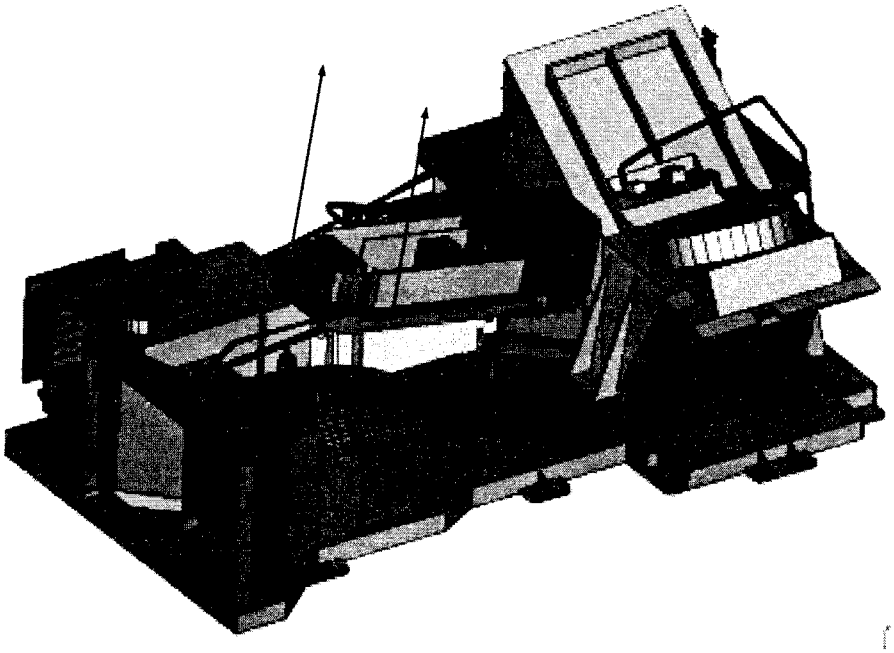

FAN-BALLAST Separation :
Remove the 2 HOLDER screws securing the FAN.

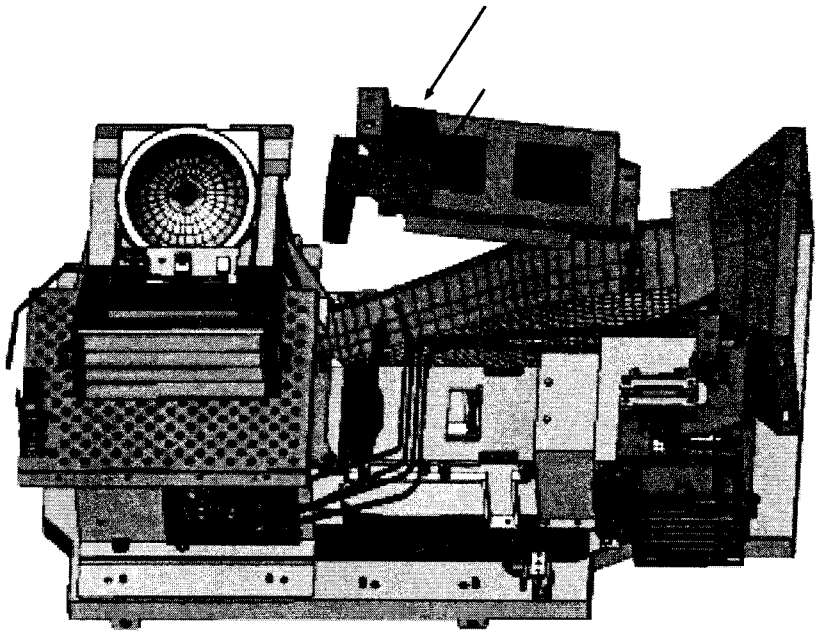

FAN-BALLAST Separation :
Remove the 2 screws securing the FAN.

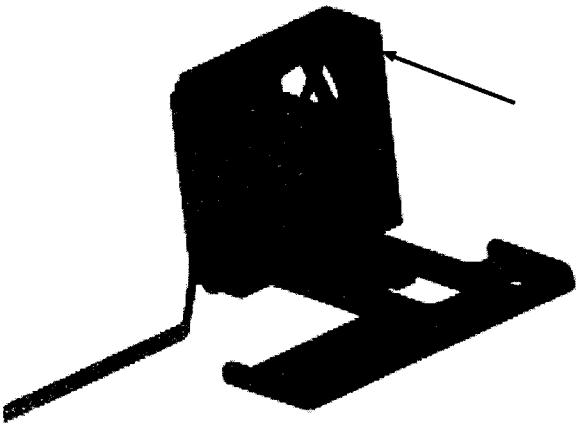

FAN-BALLAST Separation :
Pull out the FAN as shown in the figure and replace it with a new one.

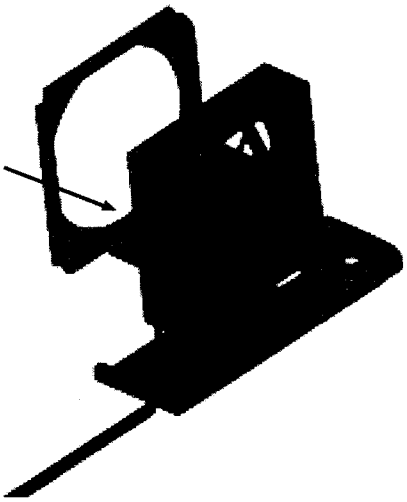

1-12-5 FAN(FAN-LAMP)

FAN-LAMP Separation :
Remove the 2 screws

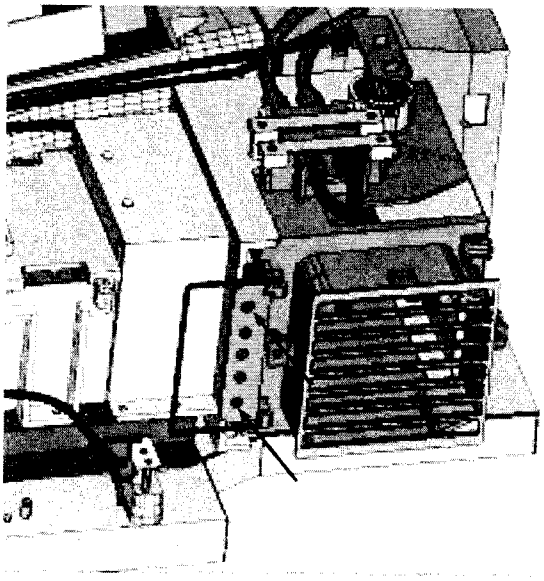

FAN-LAMP Separation :
Turn the HANDLE-LAMP by 90¢™

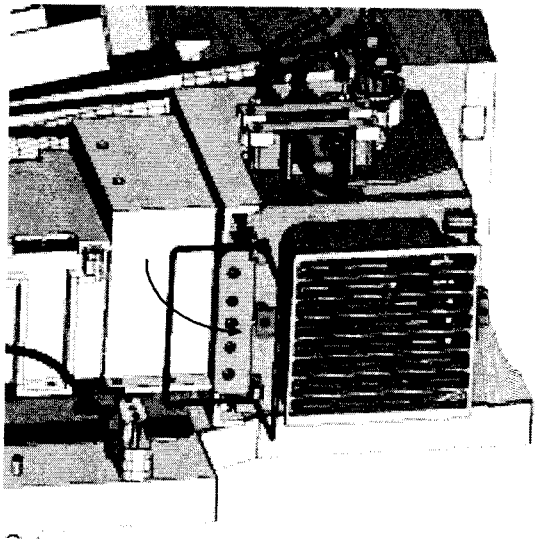

FAN-LAMP Separation :
Pull out the ASSY-LAMP in the direction shown in the figure while holding the HANDLE-LAMP.

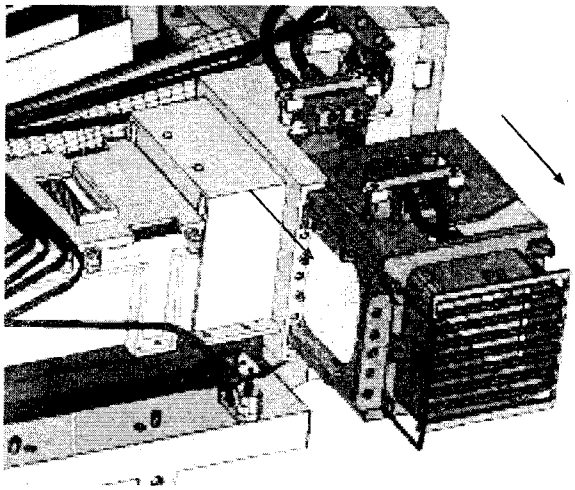

FAN-LAMP Separation :
Remove the screws securing the FAN, and replace the fan with a new one.

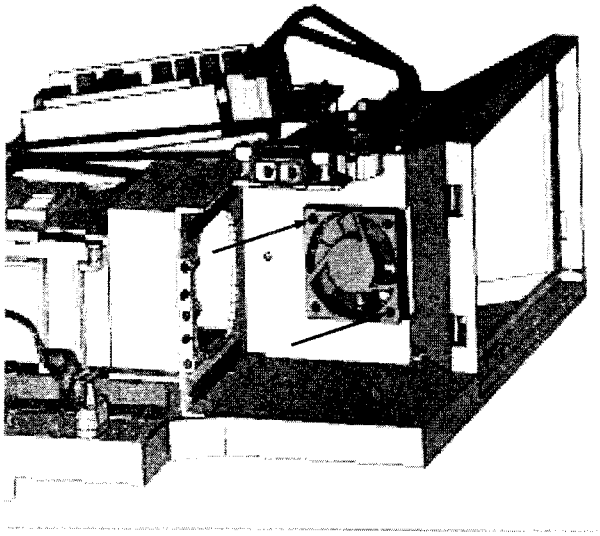

1-12-6 ASSY PCB S-INTERFACE

ASSY PCB S-INTERFACE Assembly :
Assemble the 4 screws.

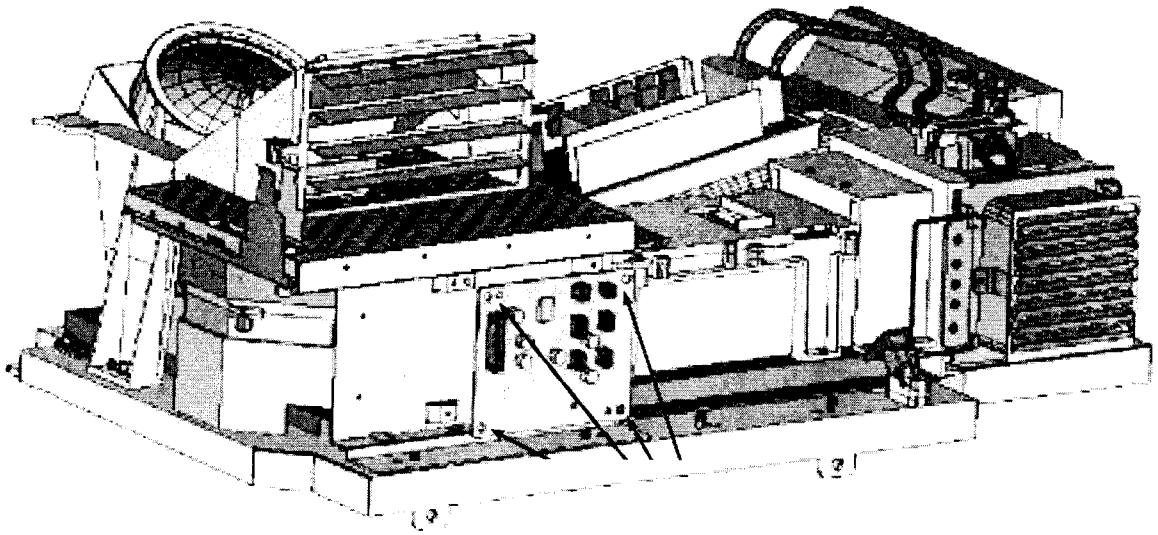

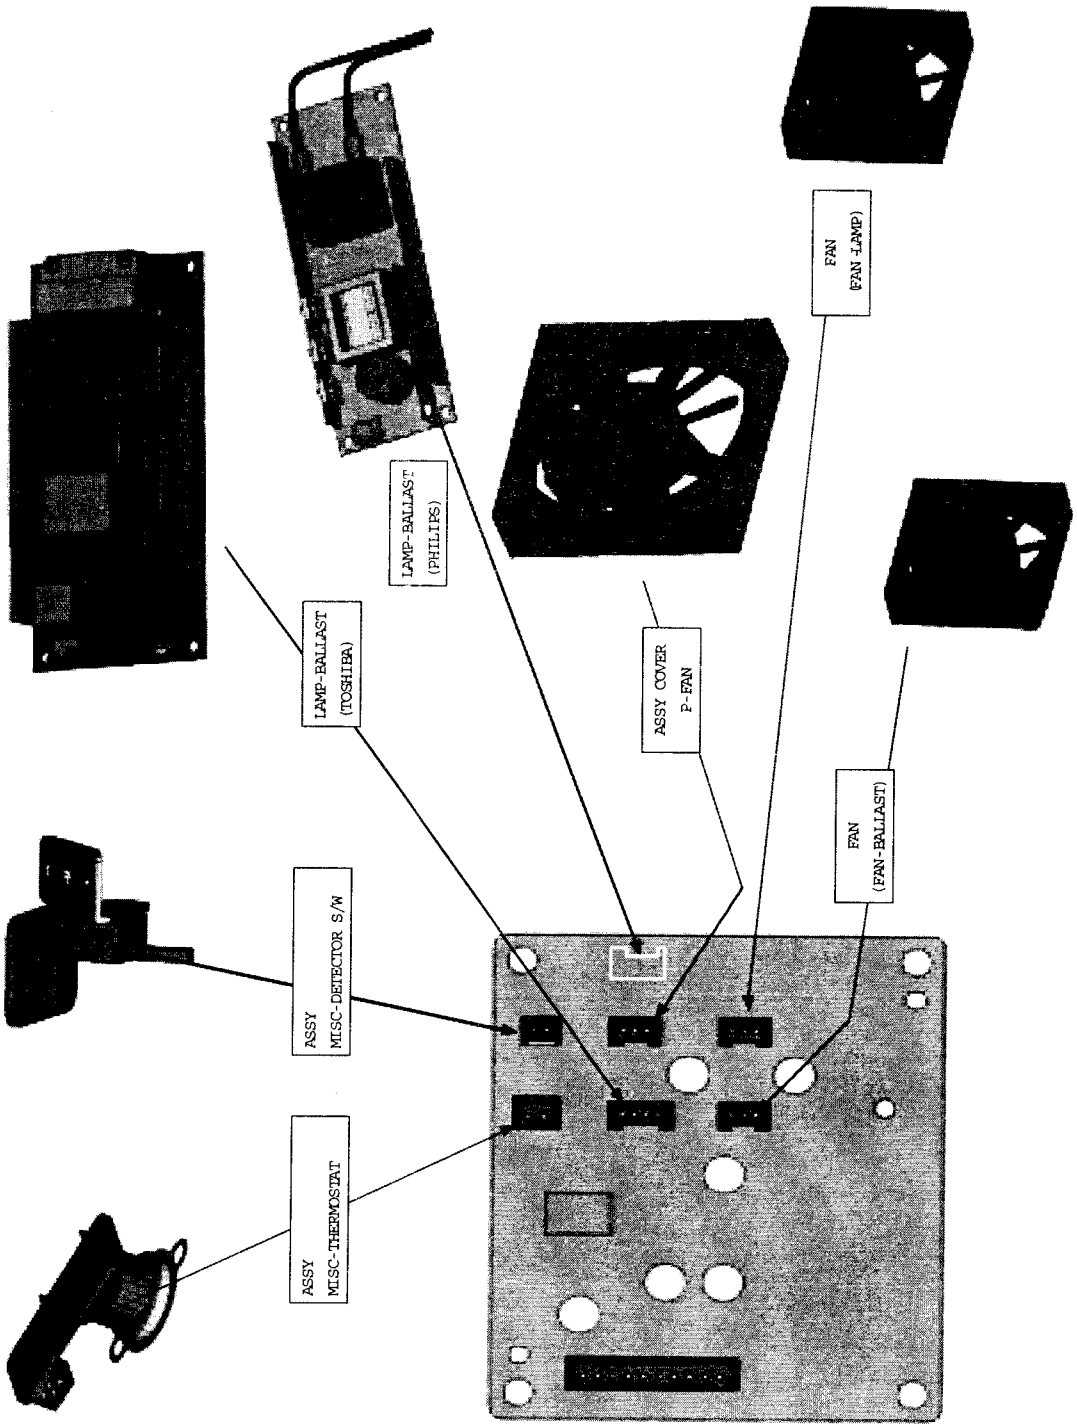
FAN
(FAN-LAMP)
LAMP-BALLAST
(PHILIPS)
LAMP-BALLAST
(TOSHIBA)
ASSY COVER
P-FAN
FAN
(FAN-BALLAST)
ASSY
MISC-DETECTOR S/W
ASSY
MISC-THERMOSTAT

2. Exploded View & Parts List

2-1 SP43L2HX/XEE

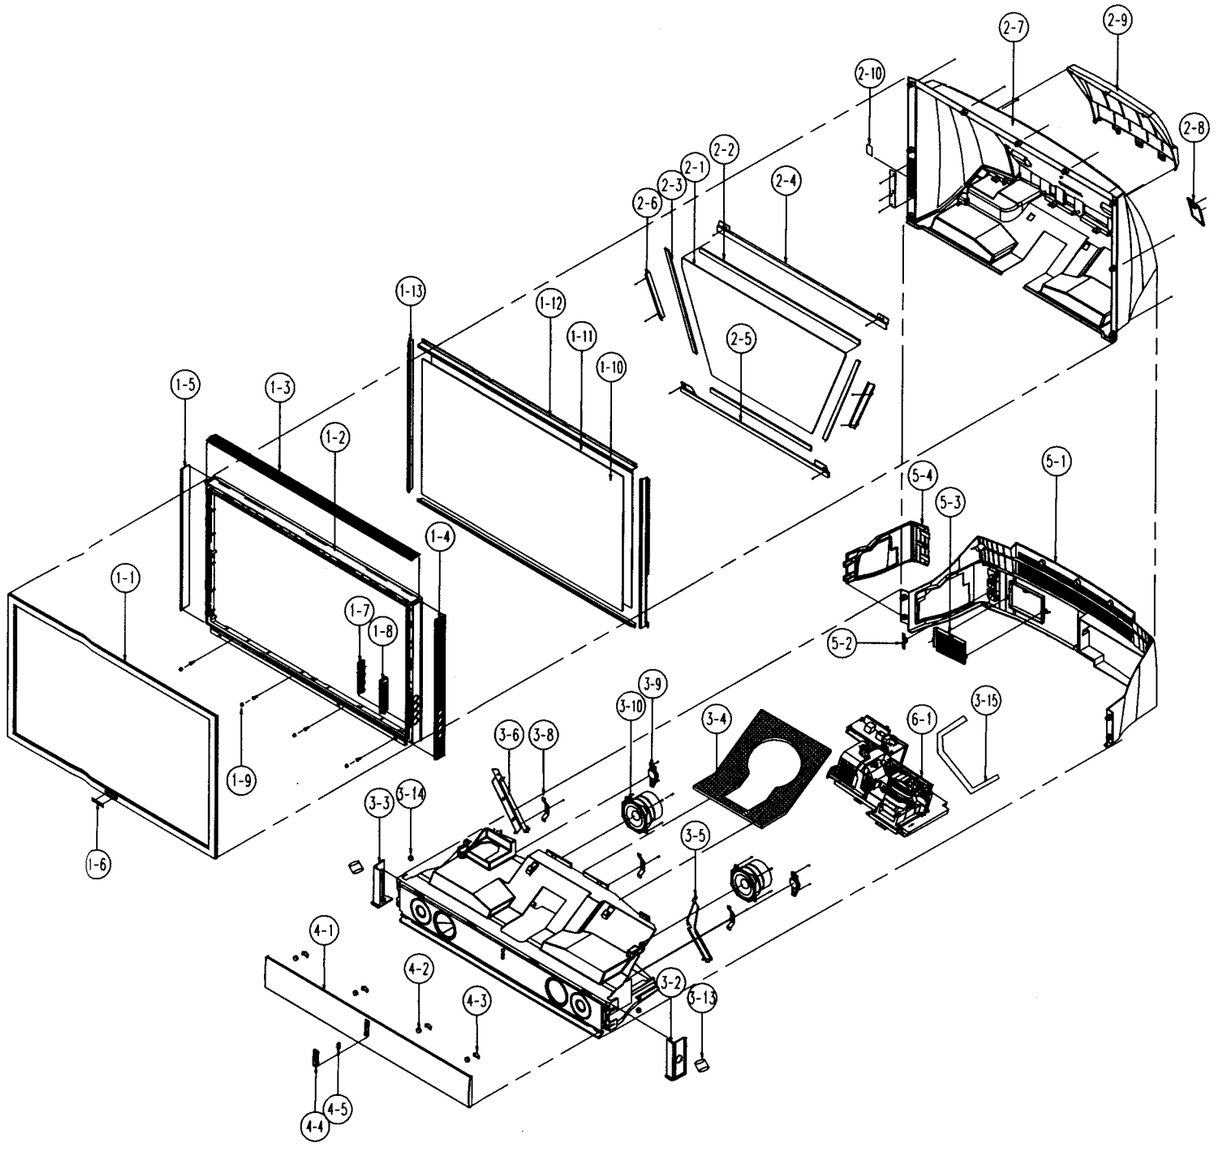

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1-1	AA64-01788L	CABINET FRONT;43L2,HIPS,HB,GRY,SV012P,EU	1		S.N.A
1-2	AA64-01791B	CABINET-MIDDLE;43L2,HIPS,HB,G4309,SV-012	1		S.N.A
1-3	BP63-00031A	COVER-DECO,TOP;43L2,ABS,HB,BLK,SVM-4704P	1		S.N.A
1-4	BP63-00037A	COVER-DECO,PAL;43L2,PAL,ABS,HB,BLK,SVM-4	1		S.N.A
1-5	BP63-00033A	COVER-DECO,L;43L2,ABS,HB,BLK,SVM-4704P,	1		S.N.A
1-6	BP64-00177A	BADGE-BRAND;ALL,AL,T1.5,70,11.3,,BLK,SIL	1		S.N.A
1-7	AA64-01793B	KNOB-FAMILY;43L2,ABS,HB,G3676,SVM-3012	1		
1-8	AA64-01794B	KNOB-HOLDER;43L2,ABS,HB,G3676,VACCUM PLA	1		
1-9	AA60-00050A	SPACER-FRONT;43J6,NEOPRENE HB,-,-,-,GRAY	4		S.N.A
1-10	AA67-00168A	SCREEN LENTI;LENTICUALR,43W,MS,973*558,T	1		
1-11	AA67-00171A	SCREEN FRESNEL;43W,MS,973*558,T1.35,43-T	1		
1-12	AA61-01136A	BRACKET-SCREEN,TOP;43,AL6063 EXTR,BLK	2		S.N.A
1-13	AA61-01137A	BRACKET-SCREEN,SIDE;43,AL6063 EXTR,BLK	2		S.N.A
2-1	BP67-00040A	MIRROR-FRONT,DM1;43,GLASS,810*472*434,F	1		
2-2	AA63-00021G	SPACER-MIRROR;524J,434J,PVC,-,-,-,BLK,-,	3		S.N.A
2-3	AA63-00021J	SPACER-MIRROR;43J6,PVC,-,-,-,BLK,-,-,L81	1		S.N.A
2-4	AA61-00184B	BRACKET-MIRROR,TOP;43J6,SECC-1,T1.6,-,-,	1		S.N.A
2-5	AA61-00182B	BRACKET-MIRROR BOT;43J6,SECC-1,T1.6,-,-,	1		S.N.A
2-6	AA61-00361B	BRACKET- MIRROR SIDE;43J6,SECC-1,T1.0,-,	2		S.N.A
2-7	AA64-00546C	CABINET-BACK,TOP;43L2,HIPS,VO,G4309	1		
2-8	AA63-00157C	COVER-DUST;43L2,HIPS,VO,G4309	1		S.N.A
2-9	AA63-00599A	COVER-BACK;507W,HIPS,V0,GRY,G4309	1		
2-10	AA60-00047B	SPACER-SIDE,JACK;43L2,NEOPRENE,GRAY,VO	1		S.N.A
3-1	AA64-00548D	CABINET-MAIN;43J6,HIPS,V0,GRY	1		S.N.A
3-2	AA61-00652B	HOLDER-SIDE,R;43L2,HIPS,G4309,HB SV-012P	1		S.N.A
3-3	AA61-00655B	HOLDER-SIDE,L;43L2,HIPS,G4309,HB SV-012P	1		S.N.A
3-4	BP60-00018A	SPACER-LENS;50L2,PU FORM V0,BLK	1		S.N.A
3-5	AA61-00853B	BRACKET-SUPPORT,L;50J6,SECC-1,T1.6,NTR	1		S.N.A
3-6	AA61-00852B	BRACKET-SUPPORT,R;50J6,SECC-1,T1.6,NTR	1		S.N.A
3-7	AA61-00165B	BRACKET-GRILLE;43J6,SECC-1,T1.0,-,-,BLK,	2		S.N.A
3-8	3001-001144	SPEAKER;25W,7OHM,88DB,1.6KHZ	2		
3-9	3001-001282	SPEAKER;25W,8OHM,90DB,55HZ	2		
3-10	AA63-60117A	SPACER-FOOT;SVP403J,NEOPRENE,-,-,-,BLK,-	2		S.N.A
3-11	AA61-00678B	HOLDER-BOSS;43/50L2,HIPS,NTR,HB	2		S.N.A
3-12	AA61-00524B	BRACKET-SUPPORT;43J6,SECC-1,T1.6,-,-,CLR	1		S.N.A
4-1	BP63-00041A	COVER-GRILLE;43L2,HIPS,HB,GRAY	1		S.N.A
4-2	AA61-00206A	MAGNET-GRILLE;43J6,PI15X3T,-,-,-,-	2		S.N.A
4-3	AA61-00651A	HOLDER-MAGNET,BOT;TOOL,J2,-,-,-,-,-,MOLD	2		S.N.A
4-4	BP63-00042A	COVER-DECO,LED;43L2,ABS HB,GRAY,AL VACCU	1		S.N.A
4-5	BP64-00071A	INDICATOR LED;507W,ACRYL	1		S.N.A
5-1	AA64-00547C	CABINET-BACK,BOT;43L2,HIPS,VO,G4309	1		
5-2	AA61-10379B	BRACKET-COVER;SP43J6,SECC-1,T1.0,-,-,-,-	1		S.N.A
5-3	BP61-00163A	BRACKET-DUST;50L2,SPC,T0.5	1		S.N.A
5-4	BN63-00332A	COVER-LAMP;50L2HX,HIPS,V0,G4309	1		S.N.A
5-5	BP91-00790A	ASSY MISC-ENGINE,MECHA;SP43L2HX,L63A	1		S.N.A

2-2 SP50L2HX/BWT

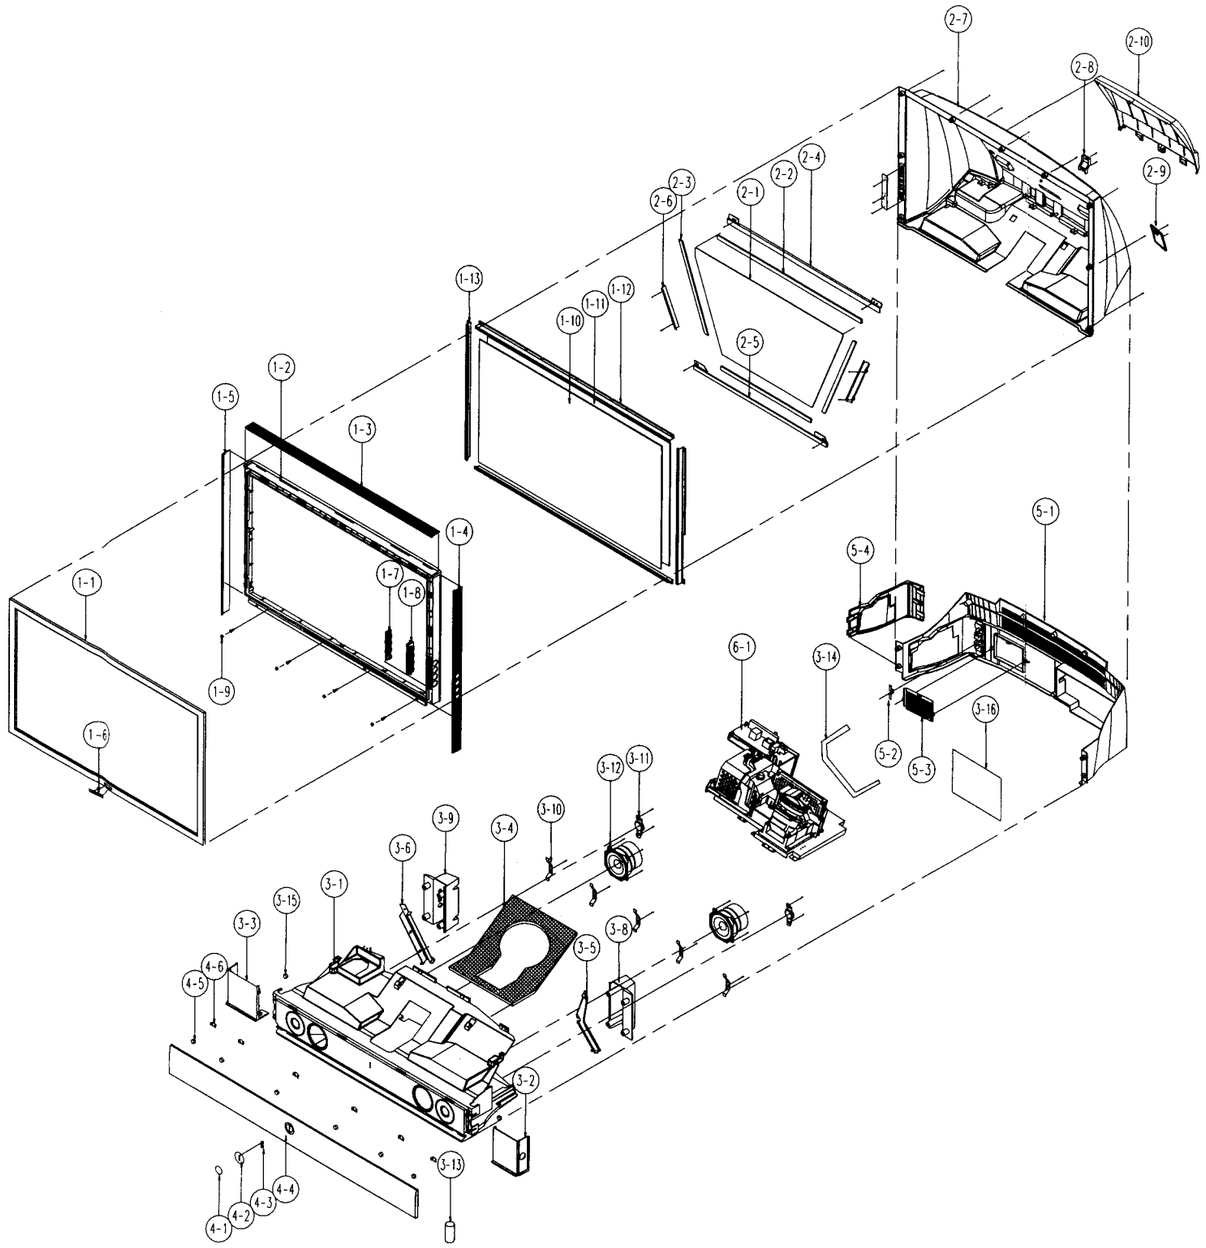

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1-1	AA64-01789F	CABINET-FRONT;50L2,GUJU,HIPS,HB,G4309,SV	1		S.N.A
1-2	AA64-01790B	CABINET-MIDDLE;50L2,HIPS,HB,G4309,SV-012	1		
1-3	BP63-00032A	COVER-DECO,TOP;50L2,ABS,HB,BLK,SV-704P 1	1		S.N.A
1-4	BP63-00034A	COVER-DECO,L;50L2,ABS,HB,BLK,SV-704P 820	1		S.N.A
1-5	BP63-00038A	COVER-DECO,PAL;50L2,PAL,ABS,HB,BLK,SV-70	1		S.N.A
1-6	BP64-00177A	BADGE-BRAND;ALL,AL,T1.5,70,11.3,,BLK,SIL	1		S.N.A
1-7	AA64-01793B	KNOB-FAMILY;43L2,ABS,HB,G3676,SVM-3012	1		
1-8	AA64-01794B	KNOB-HOLDER;43L2,ABS,HB,G3676,VACCUM PLA	1		
1-9	AA67-00169A	SCREEN LENTI;LENTICUALR,50W,MS,1128*647,	1		
1-10	AA67-00172A	SCREEN FRESNEL;50W,MS,1128*647,T1.35,P.5	1		
1-11	AA61-01138A	BRACKET-SCREEN,TOP;50,AL6063 EXTR,BLK	2		S.N.A
1-13	AA61-01139A	BRACKET-SCREEN,SIDE;50,AL6063 EXTR,BLK	2		S.N.A
2-1	BP67-00041A	MIRROR-FRONT,DM1;50,GLASS,922*547*512*3	1		
2-2	AA63-00021K	SPACER-MIRROR;50J6,PVC,BLK,HB L500	3		S.N.A
2-3	AA63-00021E	SPACER-MIRROR;SP-434JMF,PVC,-,-,-,BLK,-,	1		S.N.A
2-4	AA61-00443B	BRACKET-MIRROR,TOP;ST-50J6,SECC,T1.6,-,-	1		S.N.A
2-5	AA61-00445B	BRACKET-MIRROR,BOT;ST-50J6,SECC,T1.6,-,-	1		S.N.A
2-6	AA61-00444B	BRACKET-MIRROR,SIDE;ST-50J6,SECC,T1.6,-,	2		S.N.A
2-7	AA64-00698B	CABINET-BACK,TOP;50J6,HIPS,VO,GRY,G4309	1		
2-8	AA63-00212C	COVER-CONNECTOR;,HIPS,VO,GRAY G4309	1		S.N.A
2-9	AA63-00196C	COVER-DUST;50J6,HIPS,VO,GRAY G4309	1		S.N.A
2-10	AA63-00599A	COVER-BACK;507W,HIPS,VO,GRY,G4309	1		
3-1	AA64-00548D	CABINET-MAIN;43J6,HIPS,VO,GRY	1		S.N.A
3-2	BP61-00082A	HOLDER-FRONT,RIGHT;507W,HIPS HB,GRAY	1		S.N.A
3-3	BP61-00083A	HOLDER-FRONT,LEFT;507W,HIPS HB,GRAY	1		S.N.A
3-4	BP60-00018A	SPACER-LENS;50L2,PU FORM V0,BLK	1		S.N.A
3-5	AA61-00853B	BRACKET-SUPPORT,L;50J6,SECC-1,T1.6,NTR	1		S.N.A
3-6	AA61-00852B	BRACKET-SUPPORT,R;50J6,SECC-1,T1.6,NTR	1		S.N.A
3-8	BP61-00084A	HOLDER-BACK,RIGHT;507W,HIPS V0,GRAY	1		S.N.A
3-9	BP61-00085A	HOLDER-BACK,LEFT;507W,HIPS V0,GRAY	1		S.N.A
3-10	AA61-00165B	BRACKET-GRILLE;43J6,SECC-1,T1.0,-,-,BLK,	4		S.N.A
3-11	3001-001144	SPEAKER;25W,7OHM,88DB,1.6KHZ	2		
3-12	3001-001282	SPEAKER;25W,8OHM,90DB,55HZ	2		
3-13	AA63-60117A	SPACER-FOOT;SVP403J,NEOPRENE,-,-,-,BLK,-	2		S.N.A
3-14	AA61-00524B	BRACKET-SUPPORT;43J6,SECC-1,T1.6,-,-,CLR	1		S.N.A
3-15	AA61-00678B	HOLDER-BOSS;43/50L2,HIPS,NTR,HB	2		S.N.A
3-16	BP96-00178A	ASSY COVER P-TERMINAL BOARD;50L2,LCD,HIP	1		S.N.A
4-1	BP64-00096D	WINDOW-LED;50L2,GUJU,ACRLY,T2.0,HALF MIR	1		S.N.A
4-2	BP63-00013A	COVER-DECO,LED;507W,ABS HB,BLK	1		S.N.A
4-3	BP64-00071A	INDICATOR LED;507W,ACRYL	1		S.N.A
4-4	BP63-00012A	COVER-GRILLE;507W,HIPS,HB,GRAY	1		S.N.A
4-5	AA61-00206A	MAGNET-GRILLE;43J6,PI15X3T,-,-,-,-	4		S.N.A
4-6	AA61-00650B	HOLDER-MAGNET,TOP;50L2,ABS,HB,G3676	4		S.N.A
5-1	AA64-00547C	CABINET-BACK,BOT;43L2,HIPS,VO,G4309	1		
5-2	AA61-10379B	BRACKET-COVER;SP43J6,SECC-1,T1.0,-,-,-,-	1		S.N.A
5-3	BP61-00163A	BRACKET-DUST;50L2,SPC,T0.5	1		S.N.A
5-4	BN63-00332A	COVER-LAMP;50L2HX,HIPS,V0,G4309	1		S.N.A
6-1	BP91-00760B	ASSY MISC-ENGINE,MECHA;SP50L2HX/XEC,L63A	1		S.N.A

2-3 SP61L2HX/XEC

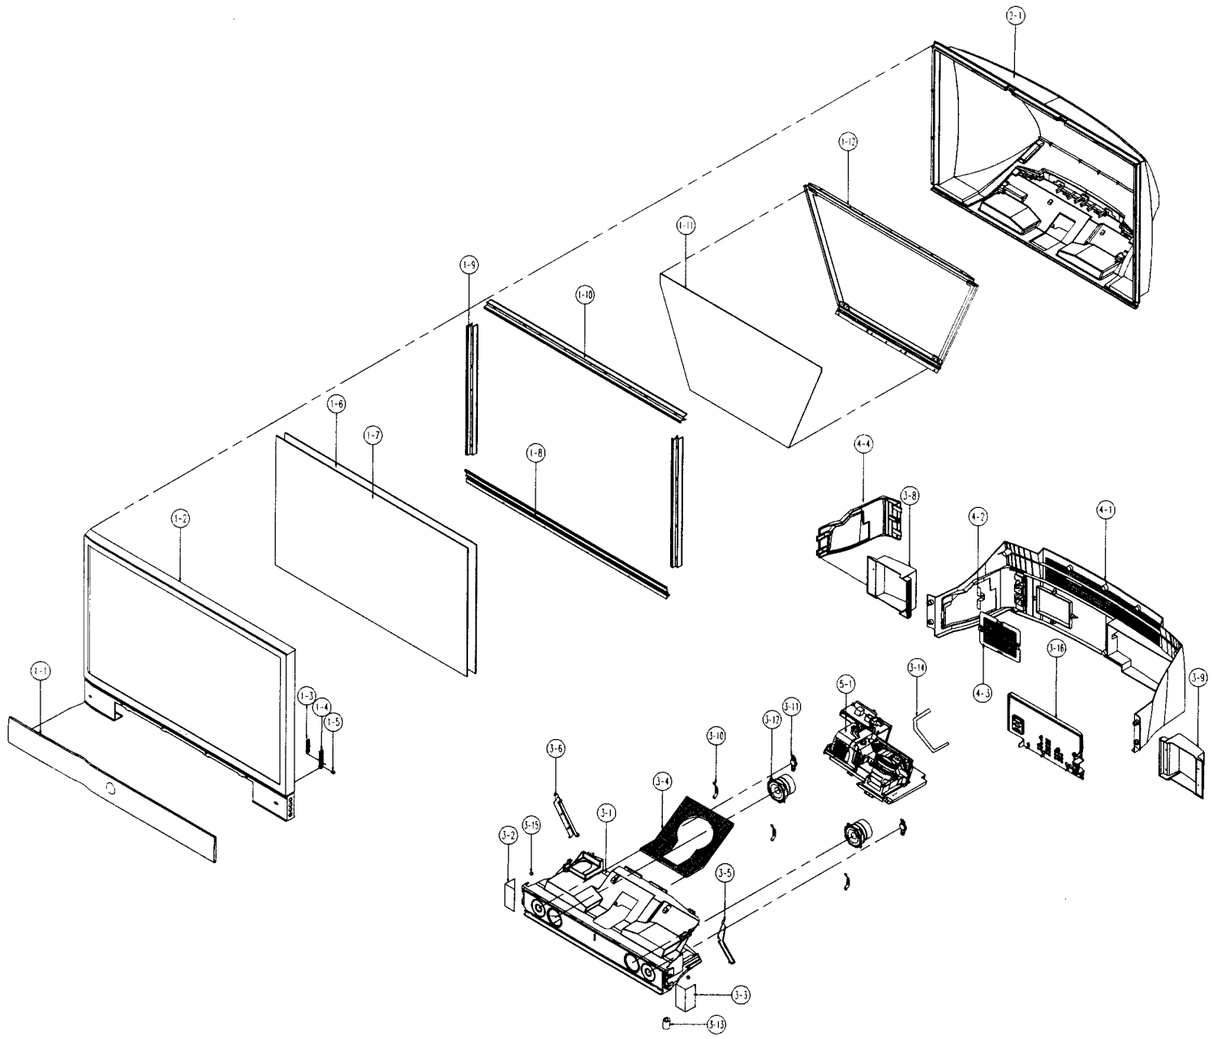

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1-1	BP96-00157L	ASSY COVER P-GRILL;61L2,HIPS,HB,GRY,SV01	1		S.N.A
1-2	BP96-00158J	ASSY COVER P-FRONT;61L2,HIPS,HB,GRY,DGM1	1		S.N.A
1-3	BP64-00072A	KNOB-FAMILY;617W,ABS HB,GRAY	1		
1-4	BP64-00074A	KNOB-HOLDER;617W,ABS HB,GRAY	1		
1-6	BP64-00098A	SCREEN FRESNEL;617W,PMMA,1381*790,T1.5	1		
1-7	BP64-00099A	SCREEN LENTI;61W,PMMA,1381*790,T2.1	1		
1-8	BP61-00097A	BRACKET-SCREEN,BOT;617W,SECC-1,T1.6,BL	1		S.N.A
1-9	BP61-00092A	BRACKET-SCREEN,SIDE;617W,AL6063 EXTR,BLK	2		S.N.A
1-10	BP61-00096A	BRACKET-SCREEN,TOP;617W,AL6063 EXTR,BLK	1		S.N.A
1-11	BP67-00043A	MIRROR-FRONT,DM1;61,GLASS,1197*678*629,	1		
1-12	BP61-00151A	BRACKET-MIRROR,ASSY;617W,BLK	1		
2-1	BN63-00373C	COVER-BACK;61W DLP,HIPS,V0,GRAY,DG-703P	1		
3-1	AA64-00548D	CABINET-MAIN;43J6,HIPS,V0,GRY	1		S.N.A
3-2	BP61-00104A	BRACKET-FRONT,R;617W,SECC-1,T1.6,CLR	1		S.N.A
3-3	BP61-00127A	BRACKET-FRONT,L;617W,SECC-1,T1.6,CLR	1		
3-4	BP60-00020A	SPACER-DUCT,OUT;50L2,CR SPONGE,BLK	2		S.N.A
3-5	AA61-00853B	BRACKET-SUPPORT,L;50J6,SECC-1,T1.6,NTR	1		S.N.A
3-6	AA61-00852B	BRACKET-SUPPORT,R;50J6,SECC-1,T1.6,NTR	1		S.N.A
3-7	BP61-00105A	HOLDER-BACK,R;,HIPS V0,GRAY,DG-703P	1		
3-8	BP61-00106A	HOLDER-BACK,L;,HIPS V0,GRAY,DG-703P	1		
3-9	AA61-00165B	BRACKET-GRILLE;43J6,SECC-1,T1.0,-,-,BLK,	4		S.N.A
3-10	3001-001144	SPEAKER;25W,7OHM,88DB,1.6KHZ	2		
3-11	3001-001282	SPEAKER;25W,8OHM,90DB,55HZ	2		
3-12	AA63-60117A	SPACER-FOOT;SVP403J,NEOPRENE,-,-,-,BLK,-	2		S.N.A
3-13		ASSY MISC P-SUPPORT BACK 1	S.N.A		
3-14	AA61-00678B	HOLDER-BOSS;43/50L2,HIPS,NTR,HB	2		S.N.A
3-15	BP96-00178A	ASSY COVER P-TERMINAL BOARD;50L2,LCD,HIP	1		S.N.A
4-1	AA64-00547C	CABINET-BACK,BOT;43L2,HIPS,VO,G4309	1		
4-2	AA61-10379B	BRACKET-COVER;SP43J6,SECC-1,T1.0,-,-,-,-	1		S.N.A
4-3	BP61-00163A	BRACKET-DUST;50L2,SPC,T0.5 1	S.N.A		
4-4	BN63-00332A	COVER-LAMP;50L2HX,HIPS,V0,G4309	1		S.N.A
5-1	BP91-00838C	ASSY MISC-ENINGE,MECHA;61 LCD ENGINE,PH	1		S.N.A

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

3. Electrical Parts List

3-1 SP43L2HX/XEE

Loc. No.		Code No.	Description ; Specification	Remark
			ASSY P/MATERIAL	
1		AA92-03159A	ASSY P/MATERIAL;SVP-43L2SR	S.N.A
..2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2		AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2		AA69-00744K	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1600,H1	S.N.A
..2	T0102	AA73-00005B	RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT	S.N.A
			ASSY COVER REAR	
1	M0002	BP90-00081H	ASSY COVER REAR;SP43L2HX,L63A	S.N.A
..2		AA60-00047B	SPACER-SIDE,JACK;43L2,NEOPRENE,GRAY,VO	S.N.A
..2		AA61-00182B	BRACKET-MIRROR BOT;43J6,SECC-1,T1.6,-,-,	S.N.A
..2		AA61-00184B	BRACKET-MIRROR,TOP;43J6,SECC-1,T1.6,-,-,	S.N.A
..2		AA61-00361B	BRACKET- MIRROR SIDE;43J6,SECC-1,T1.0,-,	S.N.A
..2		AA63-00021G	SPACER-MIRROR;524J,434J,PVC -,-,-,BLK,-,	S.N.A
..2		AA63-00021J	SPACER-MIRROR;43J6,PVC,-,-,-,BLK,-,-,L81	S.N.A
..2		AA63-00157C	COVER-DUST;43L2,HIPS,VO,G4309	S.N.A
..2	T0112	AA63-00599A	COVER-BACK;507W,HIPS,V0,GRY,G4309	
..2	T0112	AA64-00546C	CABINET-BACK,TOP;43L2,HIPS,VO,G4309	
..2		AA65-30102A	CLAMPER CORE-WIRE;-,NYLON,66,-,GRAY,-	S.N.A
..2		BP96-00184A	ASSY COVER P-BACK,BOT,SP50L2,HIPS V0 G43	S.N.A
...3		AA61-10379B	BRACKET-COVER;SP43J6,SECC-1,T1.0,-,-,-,-	S.N.A
...3	T0112	AA64-00547C	CABINET-BACK,BOT;43L2,HIPS,VO,G4309	
...3		AA64-00578B	INLAY-LAMP;43J6,PS SHEET,T0.3,-,-,BLK,-	S.N.A
...3		BN63-00332A	COVER-LAMP;50L2HX,HIPS,V0,G4309	S.N.A
...3		BN63-00363A	COVER-DUCT,LAMP;50L2HX,PC ABS,V0,BLK	S.N.A
...3	T0069	AA63-00099B	SPACER-FELT;43J6,FELT,-,-,-,BLK,T1.0,-,8	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00553C	BRACKET-METAL GRILL;SECC-1,43L2,T1.0,BLK	S.N.A
..2	T0134	BP67-00040A	MIRROR-FRONT,DM1;43,GLASS,810*472*434,F	
..2		AA61-00524B	BRACKET-SUPPORT;43J6,SECC-1,T1.6,-,-,CLR	S.N.A
..2	T0130	BP96-00178A	ASSY COVER P-TERMINAL BOARD;50L2,LCD,HIP	S.N.A
...3		BN61-00242A	HOLDER-TERMINAL;HIPS VO;HLM4365W,G4309,3	S.N.A
...3		BN64-00115A	INLAY-TERMINAL,PAL;HLM4365,PS SHEET ,T0.	S.N.A
..2		AA64-00890H	INLAY-SIDE,AV;50L2,DO,PS-SHEET,T0.3,DG-7	S.N.A
			ASSY COVER FRONT	
1	M0001	BP90-00099K	ASSY COVER FRONT;SP43L2HX/XEE,L62A	S.N.A
..2	T0081	6002-000522	SCREW-TAPPING,TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001233	SCREW-TAPTITE;PWH,+,P,M3,L8,ZPC(BLK),SWC	S.N.A
..2	PCB+CM	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2	LED+CM	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2		AA60-00050A	SPACER-FRONT;43J6,NEOPRENE HB,-,-,-,GRAY	S.N.A
..2	T0069	AA60-00091D	SPACER-FELT;-,FELT,200X10,-,-,BLK,T0.35,	S.N.A
..2	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2		AA61-00678B	HOLDER-BOSS;43/50L2,HIPS,NTR,HB	S.N.A
..2		AA61-01136A	BRACKET-SCREEN,TOP;43,AL6063 EXTR,BLK	S.N.A
..2		AA61-01137A	BRACKET-SCREEN,SIDE;43,AL6063 EXTR,BLK	S.N.A
..2		AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
..2		AA64-00969B	INLAY-SCREEN;43J6,PS SHEET,T0.5,-,-,BLK,	S.N.A
..2		AA65-30013A	CLAMPER CORE-WIRE;-,NYLON-66,V0,-,NTR,DA	S.N.A
..2	T0054	AA67-00168A	SCREEN LENTI;LENTICUALR,43W,MS,973*558,T	
..2	T0053	AA67-00171A	SCREEN FRESNEL;43W,MS,973*558,T1.35,43-T	
..2	T0076	BP39-00049A	WIRE HARNESS;HLM507W,UL1007#26,UL/CSA,3P	
..2		BP63-00033A	COVER-DECO,L;43L2,ABS,HB,BLK,SVM-4704P,	S.N.A
..2		BP63-00037A	COVER-DECO,PAL;43L2,PAL,ABS,HB,BLK,SVM-4	S.N.A
..2	T0158	BP96-00080J	ASSY COVER P-MAIN;43L2,BWT,,HIPS,HB,GRY,	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
...3		AA61-00165B	BRACKET-GRILLE;43J6,SECC-1,T1.0,-,-,BLK,	S.N.A
...3		AA61-00652B	HOLDER-SIDE,R;43L2,HIPS,G4309,HB SV-012P	S.N.A
...3		AA61-00655B	HOLDER-SIDE,L;43L2,HIPS,G4309,HB SV-012P	S.N.A
...3		AA61-00852B	BRACKET-SUPPORT,R;50J6,SECC-1,T1.6,NTR	S.N.A
...3		AA61-00853B	BRACKET-SUPPORT,L;50J6,SECC-1,T1.6,NTR	S.N.A
...3		AA63-60117A	SPACER-FOOT;SVP403J,NEOPRENE,-,-,-,BLK,-	S.N.A
...3	T0069	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
...3		AA64-00548D	CABINET-MAIN;43J6,HIPS,V0,GRY	S.N.A
...3	CIS5	BP96-00189A	ASSY SPEAKER P;8 OHM,001144,001282,00121	S.N.A
....4	T0082	3001-001144	SPEAKER;25W,7OHM,88DB,1.6KHZ	
....4	T0082	3001-001216	SPEAKER;15W,8OHM,90+-2 DB/W/0.5 M,150HZ	
....4	T0082	3001-001282	SPEAKER;25W,8OHM,90DB,55HZ	
....4	T0076	AA39-00086A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC	
....4		BP39-00021A	LEAD CONNECTOR;L63A/SP50L2H,UL1007#22,UL	
.....5	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
.....5	T0121	3301-001502	CORE-FERRITE;AE,16.5° ø7° ø30MM,-,-	
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0069	AA60-00091G	SPACER-FELT;-,FELT,200X10,-,-,BLK,T0.5,-	S.N.A
...3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2	S.N.A
...3		AA65-30102A	CLAMPER CORE-WIRE;-,NYLON,66,-,GRAY,-	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
..2	T0003	BP96-00081K	ASSY COVER P-FRONT;43L2,HIPS,HB,G4309,SV	S.N.A
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	CIS3	AA64-01788L	CABINET FRONT;43L2,HIPS,HB,GRY,SV012P,EU	S.N.A
...3	CIS6	AA64-01791B	CABINET-MIDDLE;43L2,HIPS,HB,G4309,SV-012	S.N.A
...3		BP63-00031A	COVER-DECO,TOP;43L2,ABS,HB,BLK,SVM-4704P	S.N.A
...3	T0102	BP73-00007A	RUBBER-CAP;61L2,SILICONE,WHITE,RUBBER	S.N.A
...3	T0057	BP64-00177A	BADGE-BRAND;ALL,AL,T1.5,70,11.3,,BLK,SIL	S.N.A
..2		BP96-00225B	ASSY COVER P-GRILL;43L2,BWT,HIPS,HB,,G43	S.N.A
...3	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
...3		AA61-00206A	MAGNET-GRILLE;43J6,PI15X3T,-,-,-,-	S.N.A
...3	T0069	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
...3		BP63-00041A	COVER-GRILLE;43L2,HIPS,HB,GRAY	S.N.A
...3		BP63-00042A	COVER-DECO,LED;43L2,ABS HB,GRAY,AL VACCU	S.N.A
...3	T0059	BP64-00071A	INDICATOR LED;507W,ACRYL	S.N.A
...3		BP64-00150B	WINDOW-LED;43L2,ACRYL,T2.0,HALF MIRROR 2	S.N.A
...3		AA61-00651A	HOLDER-MAGNET,BOT;TOOL,J2,-,-,-,-,-,MOLD	S.N.A
..2		BP39-00077B	LEAD CONNECTOR;SP43L2HX,UL2464#26,UL/CSA	

ASSY CHASSIS

1	M0017	BP91-00769C	ASSY CHASSIS;SP43L2HX/BWT,L63A	S.N.A
..2	T0137	AA94-11921A	ASSY PCB MISC-LINE FILTER;SP50L2HXX/RAD,	S.N.A
⚠ ...3	CX813S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
⚠ ...3	CX812S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
⚠ ...3	CX811S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
⚠ ...3	LX813S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.1OHM,1.5K	
⚠ ...3	LX812S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.1OHM,1.5K	
⚠ ...3	LX811S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.1OHM,1.5K	
...3		AA97-12826A	ASSY AUTO;L62A	S.N.A
⚠ 4	VX811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
⚠ 4	RX811S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
....4	FP811B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4	FP811A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4	GT808	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT809	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	EY801	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY802	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY803	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY804	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY805	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY806	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY807	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY808	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY809	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY810	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY811	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY812	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY813	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY814	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY815	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY816	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY817	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY818	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY819	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY820	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY821	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY822	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	PCB	AA41-00697A	PCB-LINE FILTER;SVP-50L2H,CEM-1,1L,A,1.6	S.N.A
⚠ ...3	FP811S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3	NT811S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
...3	C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3	C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3	C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	PD8012	BP39-00086A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#22,U	
..2	CIS3	BP94-00008A	ASSY PCB MISC-BACK TERMINAL;ALADDIN,3P L	

Loc. No.		Code No.	Description ; Specification	Remark
...3	CN906	3711-004059	CONNECTOR-HEADER;BOX,30P,2R,2mm,ANGLE,SNS	S.N.A
...3	JT701	3722-000498	JACK-SCART;21P,-,SN,BLK,NO	
...3	JT603	3722-001921	JACK-PIN;3P(6P),-,NI,WHT/RED/BLK,-	
...3	JT702	AA63-40276A	TERMINAL-SPK,JACK;4P,ABS VO,4,BLK	S.N.A
...3		BP97-00295A	ASSY AUTO;0	S.N.A
....4		BP97-00192A	ASSY SMD;0	S.N.A
.....5	DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5	DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5	DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5	DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5	RT02	2007-001166	R-CHIP;75ohm,5%,1/8W,TP,2012	
.....5	RT01	2007-001166	R-CHIP;75ohm,5%,1/8W,TP,2012	
.....5	RT04	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5	C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5	C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5	C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5	C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5	C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5	C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5	C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5	C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5	C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5	LT06	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT07	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT23	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT24	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT25	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT01	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT02	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT03	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT04	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	LT05	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5	PCB	AA41-00676A	PCB-TERMINAL;3P LCD,FR-4,2L,A,1.6T,196X9	S.N.A
.....5		0202-001167	SOLDER-CREAM;RX3603-2330H0,S45A,PASTE,SN	S.N.A
...3	GT701	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3	LT22	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3	LT21	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	CT701A	BP39-00087A	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#26,U	
..2	CIS1	BP94-00010A	ASSY PCB MISC-SIDE KEY CONTROL;ALADDIN,3	
...3	SW07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SW06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SW05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SW04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SW03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SW02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SW01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	CN906	3711-001031	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,ANGLE,S	S.N.A
...3	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3	T0024	AA64-01793B	KNOB-FAMILY;43L2,ABS,HB,G3676,SVM-301(	
...3	T0138	AA64-01794B	KNOB-HOLDER;43L2,ABS,HB,G3676,VACCUMPLA	
...3		BP97-00305A	ASSY AUTO;0	S.N.A
....4	R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	PCB	AA41-00678A	PCB-SIDE KEY CONTROL;3P LCD,FR-1,1L,A,1.	S.N.A
...3	CNY02A	BP39-00074A	LEAD CONNECTOR;L63A/SP50L2HX,UL2835#8,U	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	T0133	BP94-00085A	ASSY PCB POWER;SP50L2HX,L63A	
...3	T0083	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
...3	T0083	0402-001191	DIODE-RECTIFIER;MUR460,600V,4A,CASE267	
⚠ ...3	PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4	
⚠ ...3	PC802S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4	
...3	T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-	
...3	T0086	1203-001733	IC-PWM CONTROLLER;254,DIP,8P,300MIL,PLA	
...3	T0086	1203-002268	IC-PWM CONTROLLER;ML4824,PDIP,16P,250ML	
...3	C598	2201-000173	C-CERAMIC,DISC;10NF,10%,500V,Y5P,BK,16X	
...3	C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3	C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3	C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3	C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3	C857	2301-001456	C-FILM,MPE-PPF;5.1nF,5%,1.6kV,TP,29x9x16	

Loc. No.	Code No.	Description ; Specification	Remark
⚠ ...3 CX801S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
...3 C701	2401-003031	C-AL;470uF,20%,450V,GP,BK,35x45mm,1	
...3 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
⚠ ...3 RL801S	3501-001053	RELAY-POWER;5VDC,530MW,10000MA,1FORMA,15	
⚠ ...3 FD801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3 TS801S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~280V	
...3 HS803	AA96-00353C	ASSY H/S;,POWER,AA62-00066A,KA78R12,KA27	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
....4 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4 CIS	AA62-00066A	HEAT SINK-PS;-,AL,T1.0,SILVER,-,-,NATURA	S.N.A
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
⚠ ...3 D801S	AA96-50310A	ASSY H/S;-,POWER,AA62-30150C,RBV606,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
....4	AA62-30150C	HEAT SINK-ES;-,A6063 EXTR.-,WHT,40(24.5)	S.N.A
...3 L802	BH27-00027A	COIL-CHOKE-1;CH-1215E,8.5uH,-,DR1215(C:7	
...3 L804	BH27-00027A	COIL-CHOKE-1;CH-1215E,8.5uH,-,DR1215(C:7	
⚠ ...3 T801S	BP26-00007A	TRANS SWITCHING;EER3543,L62A,HLL507W,80~	
...3 PFT801	BP26-00008A	TRANS-PFC;ER-4042,L62A,14P,800UH,2.40UH,	
...3 L801	BP26-00009A	TRANS-MULTI CHOKE;EER2834,L62A,12P,28UH,	
...3 CN801	BP39-00019A	LEAD CONNECTOR;L62A/HLM507WX,UL1007#26,U	
⚠ ...3 HS801S	BP96-00085A	ASSY HEAT SINK P;H/S,SCREW,FQAF10N80,FFP	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0083	0402-001358	DIODE-RECTIFIER;FFPF10U60S,600V,10A,TO-2	
....4 Q409	0505-001683	FET-SILICON;FQAF16N50,N,500V,11.3A,0.32O	
....4 Q409	0505-001684	FET-SILICON;FQAF10N80,N,800V,6.7A,1.05OH	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4 CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
....4 CIS	BP62-00012A	HEAT SINK-ES;L62A,A6063S,T2.4,30,88	S.N.A
...3	BP97-00286A	ASSY AUTO;0	S.N.A
....4 DSP802	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP803	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP805	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP807	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D815	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D822	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D824	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D825	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP801	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D821	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000532	DIODE-RECTIFIER;ERC13-08,800V,1.2A,DO-20	
....4 T0083	0402-000532	DIODE-RECTIFIER;ERC13-08,800V,1.2A,DO-20	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
....4 DZ016	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DS802	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DSZ805	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DSZ804	0406-001106	DIODE-TVS,P6KE300A,285/-/315V,600W,DO-20	
....4 QSP802	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QSP804	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
....4 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 QSP803	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QSP801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R847	2001-000019	R-CARBON(S);100HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R841	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R808	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R846	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000780	R-CARBON;4700HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R807	2001-001070	R-CARBON(S);1200HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R858	2001-001070	R-CARBON(S);1200HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R818	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R806	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R823	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R824	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R829	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
⚠ 4 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
....4 R864	2003-000537	R-METAL OXIDE(S);1Kohm,5%,1W,AF,TP,3.3x9	
....4 R865	2003-000537	R-METAL OXIDE(S);1Kohm,5%,1W,AF,TP,3.3x9	
....4 R815	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
....4 R803	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R805	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R857	2003-000755	R-METAL OXIDE(S);6.8Kohm,5%,2W,AF,TP,4x1	
....4 R856	2003-000755	R-METAL OXIDE(S);6.8Kohm,5%,2W,AF,TP,4x1	
....4 R852	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R853	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R854	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R855	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R813	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R816	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R817	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R851	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R814	2003-001093	R-METAL OXIDE(S);12Kohm,5%,2W,AF,TP,3.9x	
....4 RS801	2003-002194	R-METAL OXIDE(S);1.8Kohm,5%,1W,AF,TP,2.5	
....4 R835	2003-002216	R-METAL OXIDE(S);1.2Kohm,5%,2W,AF,TP,3.9	
....4 R863	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R862	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R861	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R834	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R821	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R811	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R810	2004-001396	R-METAL(S);390Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R826	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R801	2004-002017	R-METAL(S);190Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R802	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R833	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RSF801	2008-001050	R-FUSIBLE;22ohm,5%,2W,AF,TP,3.9x10mm	
....4 R845	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 R832	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 R827	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 C598	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 C803	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
....4 C855	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
....4 C823	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C835	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C822	2301-001211	C-FILM,PPF;22nF,5%,400V,TP,20x7x14,7.5mm	
....4 C826	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
....4 C809	2305-000411	C-FILM,MPEF;470nF,5%,50V,TP,7.3x4.8x5.5m	
....4 C851	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C845	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C844	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C841	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C832	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C816	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C811	2305-001023	C-FILM,MPEF;680nF,10%,63V,TP,7.5x5.5x14.	
....4 CS802	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002042	C-AL;220uF,20%,10V,GP,TP,6.3x11,5	
....4 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003704	C-AL;1UF,"æ20%,100V,WT,TP,5X11MM,5	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
⚠ 4 FD802S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
....4 FD801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 FD801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 PCB	AA41-00839A	PCB-POWER;SP50L2HX,FR-4,2L,A,1.6T,245X33	S.N.A
....4 GT806	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT805	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT804	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
⚠ ...3 HS802S	BP96-00084B	ASSY HEAT SINK P;H/S,SCREW,UGF10GCT,FFPF	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 T0083	0402-001383	DIODE-RECTIFIER;MBRF10100CT,100V,10A,ITO	
....4 T0083	0402-001446	DIODE-RECTIFIER;FFPF10U20DN,200V,10A,TO-	
....4 T0083	0402-001546	DIODE-RECTIFIER;UGF10GCT,400V,10A,ITO-22	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4 CIS	BP62-00011A	HEAT SINK-ES;L62A,A6063S,T2.0,26,60	S.N.A
...3	6103-001055	SUPPORTER;DAMT-4N,L2,NTR,NYLON6/6	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 C701	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
..2 T0137	BP94-00137G	ASSY PCB MISC-LED;SP50L2HX/XEC,L63A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-004484	CONNECTOR-HEADER;BOX,5P,1R,2mm,STRAIGHT,	S.N.A
...3	AA41-00699A	PCB-LED;SVP-50L2H,FR-1,1L,A,1.6T,245X245	S.N.A
...3 DL01	AA96-30001C	ASSY LED GUIDE;-,AA61-50055A,DL-G7RA,-	S.N.A
...3 DL03	AA96-30007A	ASSY LED GUIDE;-,AA61-50055A,DL-G7GA,GRE	S.N.A
...3 DL02	AA96-30007A	ASSY LED GUIDE;-,AA61-50055A,DL-G7GA,GRE	S.N.A
...3	BP39-00085A	LEAD CONNECTOR;L63A/SP50L2HX,UL2835#28,U	
..2 CIS	BP94-00137H	ASSY PCB MISC-MASTER S/W;L63A, ALADDIN	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
⚠ ...3 SW811S	3403-000179	SWITCH-PUSH;250V,5A,DPST,-,JPW-2104B	
...3 T0076	AA39-20179B	LEAD CONNECTOR-ASSY;,3(2)P,200MM,YFH800-	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3	BP97-00355A	ASSY AUTO;SVP-42L2,50L2,L62A	S.N.A
....4 GT1	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT2	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT3	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 EY1	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY2	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY3	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY4	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	AA41-00783B	PCB-MASTER;SVP50L2HX,FR-1,1L,B,1.6T,245X	S.N.A
...3 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
...3 CIS2	BP96-00147B	ASSY COVER P-KNOB,MASTER;,ABS HB,GRAY,SV	
....4 CIS7	AA61-60003E	SPRING ETC-CS;-,SUS304,-,-,OD8,N5,OD8,-,	S.N.A
....4 T0025	AA64-01795D	KNOB-MASTER;50L2,ABS,HB,GRAY,SVM-3012	S.N.A
....4	BP61-00086A	HOLDER-KNOB;507W,ABS HB,GRAY	S.N.A
..2 T0091	BP94-00137V	ASSY PCB MISC-SIDE A/V JACK;,L63A,43 IIIC	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-000616	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	S.N.A
...3 JAP02	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JAP01	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3	BP97-00469A	ASSY AUTO;0	S.N.A
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 LP01	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
....4 LP02	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
....4 0	AA41-00679A	PCB-AV SIDE;3P LCD,FR-1,1L,A,1.6T,190.5X	S.N.A
..2 T0073	BP94-00445K	ASSY PCB MAIN;0	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 CN02	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,SRA	
...3 CN01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,SRA	
...3 CN601	3703-001187	CONNECTOR-BACK PANEL;64P,2R,FEMALE,SRA	
...3 CN906	3711-000577	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAIG	
...3 CN906	3711-000616	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	S.N.A
...3 CN906	3711-000840	CONNECTOR-HEADER;BOX,30P,2R,2MM,STRAIGHT	
...3 CN906	3711-000840	CONNECTOR-HEADER;BOX,30P,2R,2MM,STRAIGHT	
...3 CN906	3711-001038	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
...3 CN906	3711-001154	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	S.N.A
...3 CN906	3711-003045	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
...3 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
...3 CN906	3711-004484	CONNECTOR-HEADER;BOX,5P,1R,2mm,STRAIGHT,	S.N.A
...3 JA704	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
...3 JA706	3722-001796	JACK-PIN;7P(10P),-,NI,RD/RD/WH/WH/RD/BL	
...3 GT104	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 GT102	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 GT101	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3	AA96-00475E	ASSY H/S;KA278RA05,KA78R05,78R09,KA78R	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 T0087	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
....4 T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
....4 T0087	1203-001225	IC-POSI.FIXED REG.;78R09,TO-220,4P,-,PLA	
....4 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4 CIS	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
...3	BN63-00317A	SHIELD-CASE,A-TOP;50L2,SPTE,T0.5	S.N.A
...3	BN63-00318A	SHIELD-CASE,A-BOT;50L2,SPTE,T0.5	S.N.A
...3	BP97-00441A	ASSY SMD;0	S.N.A
....4 D109	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D110	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D111	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D112	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D113	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D108	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D103	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D104	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D105	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D106	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D107	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D117	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D118	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D119	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D120	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D121	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D101	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D102	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D114	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D115	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D116	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 Q122	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 Q132	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q131	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q126	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q125	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q124	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q123	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q121	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q139	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q138	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q137	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q136	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q135	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q134	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q133	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q120	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q112	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q111	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q110	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q109	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q108	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q106	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q105	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q119	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q118	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	

Loc. No.	Code No.	Description ; Specification	Remark
....4 Q117	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q116	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q115	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q114	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q113	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q101	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 IC104	0801-002279	IC-CMOS LOGIC;74VHC4053,MUX,SOP,16P,150M	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC704	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
....4 IC106	1001-001204	IC-VIDEO SWITCH;TEA6415CD,8INPUT-6OUTPUT	
....4 IC103	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
....4 IC131	1204-001814	IC-SELECTOR;CXA2151Q,QFP,48P,144MIL,PLAS	
....4 R353	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
...4 R229	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R230	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R361	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R362	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R136	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R115	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R132	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R133	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R134	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 R291	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R290	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R265	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R263	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R201	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R296	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R295	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R294	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R293	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R292	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R192	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R183	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R182	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R181	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R180	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R179	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R191	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R187	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R186	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R185	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R184	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R297	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R354	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R345	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R344	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R343	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R342	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R370	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R369	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R368	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R367	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R355	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R341	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R333	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R318	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R317	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R316	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R298	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R338	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R337	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R336	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R335	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R334	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R178	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R129	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R128	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R127	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R126	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R125	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.4 R149	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R148	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
. 4 R147	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R131	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R130	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R124	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R117	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R116	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R109	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R106	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R105	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R123	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R122	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R121	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R120	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R119	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R151	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R172	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R171	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R170	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R169	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R168	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R177	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R176	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R175	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R174	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R173	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R167	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R158	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R157	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R154	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
...4 R153	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R152	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R166	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R165	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R164	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R162	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R161	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
....4 R305	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R304	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R303	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R302	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R306	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R307	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R313	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R314	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R315	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R188	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
...4 R194	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R238	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R239	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R240	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R301	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R300	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R299	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R271	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
....4 R266	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R267	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R268	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R269	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R245	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R244	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R243	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R242	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R394	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R393	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R392	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R391	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R385	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R383	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R381	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R270	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R213	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R212	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R209	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R206	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R204	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R203	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R202	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R118	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R241	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R226	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R224	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R223	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R214	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R220	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R221	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R222	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 R356	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
....4 R103	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 R348	2007-000087	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	
....4 R346	2007-000087	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	
....4 R284	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R283	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R282	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
...4 R281	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R280	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R289	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R288	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R287	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R286	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R285	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R279	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R273	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R272	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R114	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R111	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R108	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R278	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R277	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R276	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R275	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R274	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
....4 R112	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
....4 R104	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
....4 R102	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
....4 R101	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
....4 R349	2007-000450	R-CHIP;180ohm,5%,1/10W,TP,1608	
....4 R347	2007-000450	R-CHIP;180ohm,5%,1/10W,TP,1608	
....4 R193	2007-001157	R-CHIP;750ohm,5%,1/10W,TP,1608	
....4 R189	2007-001157	R-CHIP;750ohm,5%,1/10W,TP,1608	
....4 R260	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R261	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R262	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R264	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R319	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R259	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R236	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R255	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R256	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R257	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R258	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R380	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R382	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R384	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R386	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R387	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R379	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R320	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R323	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R326	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R339	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R340	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R235	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R146	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R155	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R156	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R160	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R207	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R145	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R140	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R141	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R142	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R143	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R144	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
...4 R228	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R231	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R232	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R233	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R234	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R227	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R210	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R211	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R215	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R217	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R225	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 R205	2007-001247	R-CHIP;91ohm,5%,1/8W,TP,2012	
....4 R139	2007-001247	R-CHIP;91ohm,5%,1/8W,TP,2012	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
....4 C139	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C148	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C204	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C203	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C202	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C201	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C174	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C166	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C111	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C222	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C223	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C224	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C225	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C221	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C217	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C218	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C219	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C220	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C288	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C273	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C270	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C260	2402-001044	C-AL,SMD;100UF,20%,25V,GP,TP,8.3X8.3X6.3	
....4 C289	2402-001081	C-AL,SMD;100uF,20%,25V,WT,TP,8.3x8.3x10	
....4 C278	2402-001081	C-AL,SMD;100uF,20%,25V,WT,TP,8.3x8.3x10	
....4 C277	2402-001081	C-AL,SMD;100uF,20%,25V,WT,TP,8.3x8.3x10	
....4 C261	2402-001081	C-AL,SMD;100uF,20%,25V,WT,TP,8.3x8.3x10	
....4 C106	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	
....4 C247	2402-001159	C-AL,SMD;3.3UF,20%,50V,WT,TP,4X5.2MM	
....4 C124	2402-001159	C-AL,SMD;3.3UF,20%,50V,WT,TP,4X5.2MM	
....4 C121	2402-001159	C-AL,SMD;3.3UF,20%,50V,WT,TP,4X5.2MM	
....4 C253	2402-001160	C-AL,SMD;330UF,20%,16V,WT,TP,1008	
....4 C250	2402-001160	C-AL,SMD;330UF,20%,16V,WT,TP,1008	
....4 C280	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
....4 C269	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
....4 C264	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
....4 C189	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C191	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C231	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C256	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C285	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C187	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C126	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C129	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C182	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C183	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C185	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C230	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C125	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C120	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C117	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C272	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C244	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 L122	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L121	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L120	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L119	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L118	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L127	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L126	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L125	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L124	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L123	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L111	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L105	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L104	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L103	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L102	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L101	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L110	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L109	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L108	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L107	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L106	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 X101	2801-001473	CRYSTAL-SMD;4MHz,50ppm,28-AAN,18pF,150oh	
....4 X102	2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	

Loc. No.	Code No.	Description ; Specification	Remark
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 0	AA41-00672B	PCB MAIN;SP43L2HX/50L2HX,4,L63A,1	S.N.A
....4 T0119	MD09-00137A	IC MICOM;P-PCFM-012,P-PCFM-012,32,5V,12M	
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
...3	MD39-00077A	CBF IF;PPR-2200,1P,UL1365#26,100MM,UL/CS	
...3	BP63-00120A	GASKET;SP50L2HX,CONDUCTIVE-FABRIC,4.0mm,	S.N.A
...3 TU01	AA40-00094A	TUNER;TCLW3101PD16A(S),PAL/SECAM,181CH,3	
...3 TU02	AA40-00095A	TUNER;TCPW3001PC16A(S),PAL/SECAM,181CH,3	
...3 T0203	BP95-00103A	ASSY SUB-DIGITAL;SP43L2HX/BWT,L63A,CIS	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 SW902	3404-000176	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
....4 JA401	3701-000003	CONNECTOR-DSUB;15P,3R,FEMALE,ANGLE,AUF	
....4 JA403	3701-001264	CONNECTOR-DSUB;9P,2R,MALE,ANGLE,AUF	
....4 CN03	3702-001137	CONNECTOR-RIBBON;20P,FEMALE,STRAIGHT,AU 1	
....4 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN02	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4	BP61-00195A	BRACKET-EMI,MDR;SP50L2,PBS,T0.2	S.N.A
....4	BP61-00196A	BRACKET-EMI,DIG;SP50L2,PBS,T0.2	S.N.A
....4	BP63-00100A	SHIELD CASE-TOP ASSY;50L2,SPTE,T0.5	S.N.A
.....5	BN63-00401A	SHIELD-CASE,TOP;50L2,LCD,SPTE,T0.5	S.N.A
.....5	BN63-00402A	SHIELD-CASE,MID;50L2,LCD,SPTE,T0.3	S.N.A
.....5	BP73-00019A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
.....5	BP73-00020A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
.....5	BP73-00021A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
.....5	BP73-00022A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
.....5	BP62-00026A	HEAT SINK-D TOP;SP50L2,AL,1.0,,,,,	S.N.A
....4	BP63-00101A	SHIELD CASE-BOT ASSY;50L2,SPTE,T0.5	S.N.A
.....5	BN63-00403A	SHIELD-CASE,BOT;50L2,LCD,SPTE,T0.5	S.N.A
.....5	BP73-00019A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
.....5	BP73-00021A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
.....5	BP62-00026A	HEAT SINK-D TOP;SP50L2,AL,1.0,,,,,	S.N.A
.....5	BP73-00020A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
....4	BP97-00483A	ASSY SMD-MICOM;EUROPE,TM_ALDP06	S.N.A
⚠ 5 D415	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D414	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D413	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D412	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D416	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D417	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D418	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D451	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D452	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D411	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D401	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D402	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D403	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D404	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D405	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D410	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D409	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D408	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D407	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D419	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-3,	
⚠ 5 D426	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	

Loc. No.	Code No.	Description ; Specification	Remark
⚠ 5 D425	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
.....5 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
.....5 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
.....5 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 Q905	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q802	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q801	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 Q409	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
.....5 Q409	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
.....5 Q409	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
.....5 Q409	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
.....5 LD01	0601-001313	LED;CHIP,GRN,2x1.8mm,565nm	
.....5 IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
.....5 IC104	0801-002559	IC-CMOS LOGIC;74LVX74,D FLIP-FLOP,TSSOP,	
.....5 IC606	0802-001025	IC-BICMOS LOGIC;74LCX374,D FILP-FLOP,TSS	
.....5 IC804	1001-001067	IC-ANALOG SWITCH;QS34X245-Q3,CMOS,TQSOP,	
.....5 IC803	1001-001067	IC-ANALOG SWITCH;QS34X245-Q3,CMOS,TQSOP,	
.....5 IC108	1002-001179	IC-A/D CONVERTER;AD9884,8BIT,QFP,128P,-,	
.....5 IC108	1002-001343	IC-A/D CONVERTER;AD9888KS-100,-,MQFP,128	
⚠ 5 IC402	1003-001391	IC-DISPLAY DRIVER;FLI2200,QFP,176P,945MI	
.....5 IC604	1003-001503	IC-DISPLAY DRIVER;SNI,QFP,208P,28X28MM,-	
.....5 IC110	1006-001076	IC-DRIVER/RECEIVER;232,SOP,16P,300MIL,DU	
.....5 IC112	1103-000129	IC-EEPROM;24C02,256x8BIT,SOP,8P,150MIL,1	
.....5 IC112	1103-000129	IC-EEPROM;24C02,256x8BIT,SOP,8P,150MIL,1	
.....5 IC112	1103-001147	IC-EEPROM;24256,256KBIT,SOP,8P,150MIL,-,	
.....5 IC113	1105-001305	IC-DRAM;4S641632,1Mx16x4Bit,TSOP,54P,400	
.....5 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
.....5 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
.....5 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
.....5 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
.....5 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
.....5 IC115	1107-001087	IC-FLASH MEMORY;29LV160,1Mx16BIT,SOP,48P	
⚠ 5 IC407	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P,1	
.....5 IC904	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
⚠ 5 IC405	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
.....5 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
.....5 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
.....5 T0087	1203-002074	IC-POSI.FIXED REG.;MIC39150,TO-263,3P,-,	
.....5 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5 T0123	1203-002351	IC-VOLTAGE REGULATOR;LF25C,DPAK,3P,240MI	
.....5 IC118	1204-001926	IC-VIDEO PROCESS;VPC3230D-C5,PQFP,80P,-,	
.....5 IC118	1204-001926	IC-VIDEO PROCESS;VPC3230D-C5,PQFP,80P,-,	
.....5 IC118	1204-001990	IC-VIDEO PROCESS;ASI500,BGA,316P,27X27MM	
.....5 IC901	1204-002105	IC-DECODER;SDA6001-B12,MQFP,128P,28x28mm	
.....5 IC120	1205-001778	IC-TRANSMITTER;SII160CT100,TQFP,100P,551	
.....5 IC501	1205-002198	IC-RECEIVER;SII169CT100,LQFP,100P,14X14M	
.....5 R521	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R522	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R540	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R541	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R544	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R546	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R549	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R552	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R553	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R493	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R504	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R506	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R508	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R509	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R514	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R517	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R518	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R520	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R589	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R590	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R592	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R702	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R803	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R804	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R901	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R902	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R950	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R557	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R558	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R560	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R562	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R572	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R573	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R576	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R583	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R586	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1108	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1109	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1110	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1114	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1115	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1116	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1117	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1118	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R431	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1048	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1049	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1050	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1051	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1056	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1078	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1079	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1080	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1091	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R471	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R476	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R479	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R480	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R481	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R482	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R484	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R485	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R491	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R432	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R439	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R443	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R450	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R465	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R470	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R469	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R468	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R467	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R1037	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R601	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R599	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R591	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R612	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R613	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R980	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R550	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R1107	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R434	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R436	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R543	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R528	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R442	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5 R1090	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R559	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R561	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R939	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R940	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R976	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R977	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R1083	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R1084	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R1085	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R1086	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R1089	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R1088	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R1087	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R515	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R513	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R512	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R511	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R510	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R503	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R516	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R538	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R537	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R535	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R533	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R532	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R523	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R494	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R489	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R488	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R487	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R486	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R475	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R495	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R502	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R500	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R499	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R498	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R497	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R496	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R945	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R944	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R943	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R938	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R937	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R935	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R970	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R995	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R993	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R992	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R991	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R990	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R973	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R593	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R585	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R584	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R579	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R578	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R574	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R594	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R934	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R933	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R932	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R931	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R600	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R596	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R474	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1022	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1021	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1020	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1019	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1018	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1017	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1024	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1030	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1029	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1028	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1027	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1026	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1025	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1008	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1007	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1006	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1005	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1003	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1002	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1009	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1016	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1015	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1014	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1012	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R1011	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1010	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R457	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R456	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R455	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R454	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R453	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R449	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R458	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R473	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R463	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R462	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R461	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R460	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R459	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R402	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1052	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1035	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1034	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1032	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R1031	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R407	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R448	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R447	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R445	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R418	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R416	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R409	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R981	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R982	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R812	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R525	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	
.....5 R927	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R925	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R580	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R547	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R437	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R598	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R597	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R577	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R911	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R923	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R926	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R972	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R555	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R1036	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R1113	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R408	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R410	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R492	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R501	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R524	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R534	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R539	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R401	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R505	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5 R963	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R964	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R965	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R966	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R962	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R961	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R960	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R959	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R958	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R999	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R996	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R989	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R987	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R985	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R983	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R971	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R968	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R967	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R929	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R701	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R536	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R531	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R414	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R412	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R1060	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R1057	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R957	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R956	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R955	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R954	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R953	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R930	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R947	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R951	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R952	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R1001	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R811	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R813	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R908	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R910	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R588	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R587	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R582	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R581	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R969	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R948	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R946	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R941	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R464	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R451	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R446	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R441	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R417	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R415	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R411	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R1103	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R575	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R548	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R526	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R490	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R466	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R477	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R478	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R483	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R554	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
.....5 R433	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....5 R545	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....5 R919	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R936	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R975	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R978	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R918	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R1059	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R1062	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R907	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R909	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R979	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R440	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R1063	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R426	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R427	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R428	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R551	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R903	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R904	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R425	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R1058	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R1061	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R421	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R422	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R423	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R424	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R519	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5 R472	2007-000539	R-CHIP;200ohm,5%,1/10W,TP,1608	
.....5 R1111	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
.....5 R542	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	
.....5 R444	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	
.....5 R438	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R605	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R604	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R603	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R429	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R607	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R608	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R609	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R949	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R420	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R1075	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R1076	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R1077	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R403	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R419	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R406	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R405	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R404	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 RW810	2011-000002	R-NETWORK;22OHM,5%,1/16W,L,CHIP,8P,TP,32	
.....5 RW807	2011-000002	R-NETWORK;22OHM,5%,1/16W,L,CHIP,8P,TP,32	
.....5 RW604	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW605	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW606	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW701	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW702	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW506	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW507	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW601	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW602	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW603	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW703	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW802	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW803	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW804	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW805	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW806	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW704	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW705	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW706	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW707	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW801	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW505	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW106	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW107	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW108	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW109	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW401	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW101	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW102	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW103	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW104	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW105	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW402	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW408	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW501	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW502	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW503	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW504	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW403	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW404	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW405	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW406	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW407	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW711	2011-001093	R-NETWORK;100OHM,5%,1/16W,L,CHIP,8P,TP,3	
.....5 RW712	2011-001093	R-NETWORK;100OHM,5%,1/16W,L,CHIP,8P,TP,3	
.....5 RW713	2011-001093	R-NETWORK;100OHM,5%,1/16W,L,CHIP,8P,TP,3	
.....5 RW710	2011-001093	R-NETWORK;100OHM,5%,1/16W,L,CHIP,8P,TP,3	
.....5 RW709	2011-001093	R-NETWORK;100OHM,5%,1/16W,L,CHIP,8P,TP,3	
.....5 RW708	2011-001093	R-NETWORK;100OHM,5%,1/16W,L,CHIP,8P,TP,3	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000274	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000274	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000280	C-CERAMIC,CHIP;0.01NF,0.5PF,50V,C0G,TP,1	
.....5 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000405	C-CERAMIC,CHIP;0.18NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000405	C-CERAMIC,CHIP;0.18NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000727	C-CERAMIC,CHIP;3.9nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
.....5 C120	2203-000838	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
.....5 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
.....5 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
.....5 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
.....5 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
.....5 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000844	C-CERAMIC,CHIP;39nF,10%,50V,X7R,TP,2012,	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
.....5 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
.....5 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
.....5 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
.....5 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
.....5 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
.....5 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
.....5 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
.....5 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
.....5 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
.....5 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001607	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,1608	
.....5 C120	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
.....5 C120	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
.....5 C120	2203-001680	C-CERAMIC,CHIP;68nF,20%,50V,Z5U,TP,2012	
.....5 C120	2203-001680	C-CERAMIC,CHIP;68nF,20%,50V,Z5U,TP,2012	
.....5 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....5 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....5 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....5 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....5 C120	2203-006170	C-CERAMIC,CHIP;220NF,10%,16V,X7R,TP,1608	
.....5 C825	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
.....5 C486	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
.....5 C464	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
.....5 C1044	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
.....5 C565	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C577	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C595	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C929	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C930	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C416	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C417	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C419	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C420	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C564	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5 C944	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C934	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C723	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C654	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C807	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 C801	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 C436	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
.....5 C431	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
.....5 C429	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
.....5 C427	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
.....5 C404	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
.....5 C922	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C805	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C774	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C765	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C750	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C727	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C995	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C989	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C982	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C972	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C961	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C952	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C474	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C467	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C422	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C1041	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C1021	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C1006	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C611	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C566	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C550	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C476	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C524	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C529	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 C978	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
.....5 C974	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
.....5 C720	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
.....5 C615	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
.....5 C525	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
.....5 C574	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
.....5 C614	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
.....5 X601	2801-003667	CRYSTAL-SMD;14.3182MHZ,50PPM,28-AAN,16,5	
.....5 X902	2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	
.....5 X402	2801-004004	CRYSTAL-SMD;20.25MHz,20ppm,28-AAN,13pF,2	
.....5 X401	2801-004004	CRYSTAL-SMD;20.25MHz,20ppm,28-AAN,13pF,2	
.....5 X901	2801-004117	CRYSTAL-SMD;6MHZ,30PPM,28-ABX,20PF,150OH	
.....5 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
.....5 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
.....5 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 T0119	MD09-00137A	IC MICOM;P-PCFM-012,P-PCFM-012,32,5V,12M	
.....5 0	AA41-00675B	PCB;SP43L2HX/50L2HX,6.L63A,1	S.N.A
.....5 R413	2007-000087	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	
.....5 R916	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5 R917	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5 R928	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5 R942	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
....4 JA402	3701-001173	CONNECTOR-DSUB;24P,3R,FEMALE,ANGLE,AUF	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3.L8.ZPC(YEL),SWR	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3 CIS	BP95-00067A	ASSY SUB-AUDIO;ALADDIN PROJECT	
....4 CND601	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	
....4 LD607	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
....4 LD608	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
....4 LD609	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
....4 LD610	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
....4 LD603	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
....4 LD604	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
....4 LD605	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
....4 LD606	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
....4 IC602	BP96-00141A	ASSY HEAT SINK P;H/S,SPRING,TA2020,OIL S	S.N.A
....4 IC603	BP96-00141A	ASSY HEAT SINK P;H/S,SPRING,TA2020,OIL S	S.N.A
.....5 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
.....5 T0085	1201-001885	IC-AUDIO AMP;TA2020-020,SSIP,32P,649MIL,	
.....5 CIS	BP61-00129A	BRACKET-TR;,617W,T0.4,SUS-1	S.N.A
.....5 CIS	BP62-00013A	HEAT SINK-PS;HLM507W,A1050S,T1.0,21,44.6	S.N.A
....4	BP97-00189A	ASSY AUTO;ALADDIN PROJECT	S.N.A
.....5 RD631	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
.....5 RD630	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
.....5 RD629	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
.....5 RD628	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
.....5 CD668	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD667	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD666	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD670	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD671	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD672	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD649	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD650	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD651	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD657	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD656	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD654	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 CD674	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 CD673	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 CD669	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 CD642	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 CD653	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 CD658	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 C701	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5	BP97-00158A	ASSY SMD;ALADDIN PROJECT	S.N.A
.....6DD601	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6DD602	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....6DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....6DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....6DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....6DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....6DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....6DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....6QD602	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....6QD601	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....6RD641	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6RD640	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6RD619	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	
.....6RD618	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	
.....6RD616	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6RD615	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6RD614	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6RD613	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6RD609	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD608	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD607	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD610	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD611	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD612	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD601	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD602	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD606	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD605	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD604	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6RD642	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6RD638	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6RD637	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6RD633	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6RD632	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6RD627	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6RD626	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6RD622	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6RD643	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....6RD617	2007-000121	R-CHIP;820ohm,5%,1/10W,TP,1608	
.....6RD621	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....6RD620	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....6RD623	2007-001175	R-CHIP;8.2Kohm,1%,1/10W,TP,1608	
.....6RD636	2007-001175	R-CHIP;8.2Kohm,1%,1/10W,TP,1608	
.....6C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....6C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
...3 T0136	BP31-00001B	FAN;G9225L12B2-FS(WS),SP50L2HX,,,395mm W	
...3 T0136	BP31-00003A	FAN;G5015S12B2-RS(WS),SVP-61L2H,PBTP,WIR	
...3	BP39-00075A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#26,U	
...3	BP39-00076A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#26,U	
...3	BP39-00078A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#22,U	
...3	BP39-00080A	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#26,U	
...3	BP60-00018A	SPACER-LENS;50L2,PU FORM V0,BLK	S.N.A
...3	BP60-00020A	SPACER-DUCT,OUT;50L2,CR SPONGE,BLK	S.N.A
...3	BP61-00153A	BRACKET-RMC;B3K,SECC T=1.0	S.N.A
...3	BP61-00163A	BRACKET-DUST;50L2,SPC,T0.5	S.N.A
...3	BP61-00165A	BRACKET-EARTH;50L2,AL,T1.0	S.N.A
...3	BP61-00197A	BRACKET-EMI,LCD;SP50L2HX,PBT,0.2,,,,	S.N.A
...3	BP62-00016A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,36.2,	S.N.A
...3	BP63-00039A	COVER-LENS;50L2,HIPS VO BLK	S.N.A
...3	BP91-00766A	ASSY MISC-REMOCON;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 DZ016	0403-001331	DIODE-ZENER;MTZJ6.8A,6.29-6.63V,500mW,DO	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C598	2201-000982	C-CERAMIC,DISC;10NF,+80-20%,50V,Y5V,TP,4	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 CN906	3711-004386	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	S.N.A
....4 PCB	AA41-00840A	PCB-REMOCON;SP50L2HX,FR-1,1L,A,1.6T,245X	S.N.A
....4 PRE01	BN32-00003A	MODULE REMOCON;346HF7,38KHZ,940NM,13*10*	
....4	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
....4 CN01A	BP39-00089A	LEAD CONNECTOR;SP50L2HX,UL2547#26,UL/CSA	
...3	BP91-00767A	ASSY MISC-DETECTOR S/W;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 SW1	3409-000178	SWITCH-LEVER;12V,100mA,SPDT,-,27deg	
....4 CCM	6001-001003	SCREW-MACHINE;BH,+,M2.6,L6,ZPC(BLK),SWRC	S.N.A
....4	AA41-00756A	PCB-COVER PROTERCTION;HLM507W/SPL,CEM-1,	S.N.A
....4	AA61-10185A	BRACKET-SENSOR;L3300,SECC,T1.0,-,-,-,-	S.N.A
....4 CN1	BP39-00026B	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#26,U	
...3	BP91-00773G	ASSY MISC-THERMOSTAT;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CN906	3711-000056	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,S	S.N.A
....4 CN2	4712-001011	THERMOSTAT;125/250V,15A/7.5A,105+-5C,95+	
....4	BP39-00043B	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#22,U	
....4 0	AA41-00801C	PCB;HLM507W,2,2,1.6mm,40mm*15mm,L62A,30	S.N.A
...3 CIS4	BP94-00474A	ASSY PCB S-LCD DRIVER;SP50L2HX/XEC,L63A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CNL101	3702-001137	CONNECTOR-RIBBON;20P,FEMALE,STRAIGHT,AU1	
....4 CN906	3711-001154	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	S.N.A
....4	BP97-00188A	ASSY SMD;0	S.N.A
.....5 DL109	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL108	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL107	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL110	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL171	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL172	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL101	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL102	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL103	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL104	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL105	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL106	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
.....5 IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001334	IC-D/A CONVERTER;M62392FP,8BIT,SOP,24P,2	
.....5 ICL501	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5 ICL401	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5 ICL301	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5 IC112	1103-001147	IC-EEPROM;24256,256KBIT,SOP,8P,150MIL,-,	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5 DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5 DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL,	
.....5 DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL,	
.....5 DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL,	
.....5 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
.....5 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
.....5 IC012	1203-002470	IC-POSI.ADJUST REG.;FAN1616AS25X,SOT-223	
.....5 ICL202	1203-002709	IC-VOL. REFERANCE;MAX875BCSA,SOIC,8P,4.9	
.....5 IC118	1204-001975	IC-VIDEO PROCESS;L3E07050K0A,QFP,176P,24	
.....5 RL302	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL301	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL270	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL269	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL268	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL267	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL266	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL265	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL262	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL340	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL542	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL540	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL502	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL501	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL442	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL440	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL402	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL401	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL342	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL261	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL126	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL125	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL107	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL106	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL105	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL104	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL103	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL102	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL128	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL260	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL259	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL258	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL257	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL256	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL130	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL131	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL133	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL251	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 RL264	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RL263	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RL113	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RL112	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RL115	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 RL134	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 RL129	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 RL207	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 RL206	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 RL205	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 RL204	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 RL203	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 RL202	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 RL201	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 RL546	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	
.....5 RL544	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	
.....5 RL446	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	
.....5 RL353	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	
.....5 RL355	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	
.....5 RL444	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	
.....5 RL121	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 RL122	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 RL123	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 RL124	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 RL117	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 RL118	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 RL119	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 RL120	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 RL447	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL445	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL360	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL358	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL356	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL449	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL551	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL549	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL547	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL545	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL451	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL248	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL246	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL242	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL241	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL240	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL249	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL354	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL255	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL254	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL252	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL250	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL247	2007-000701	R-CHIP;3.6Kohm,1%,1/16W,DA,TP,1608	
.....5 RL245	2007-000701	R-CHIP;3.6Kohm,1%,1/16W,DA,TP,1608	
.....5 RL553	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5 RL552	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5 RL453	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5 RL361	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5 RL362	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5 RL452	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5 RWL101	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW216	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW215	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW214	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW213	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL102	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL107	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL106	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL105	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL104	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL103	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW212	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW205	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW204	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW203	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW202	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW201	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW206	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW211	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW210	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW209	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW208	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW207	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4	BP63-00043A	SHIELD-CASE,PANEL;50L2,PBT,TO.2	S.N.A
...3	BP96-00187A	ASSY MISC P-SHIELD CASE,BOT;SP50L2HX/XEC	S.N.A
....4	BN63-00334A	SHIELD-CASE,BOT;50L2HX,SPTE,TO.5	S.N.A
....4	BP63-00044A	SHIELD-CASE,DUST;50L2,SPTE,TO.5	S.N.A
...3	BP96-00188A	ASSY MISC P-BRKT RAY;SP50L2HX/XEC,50L2	
....4	BP61-00164A	BRACKET-RAY;50L2,SPC,TO.5	S.N.A
....4	BP61-00182A	BRACKET-RAY2;50L2,SPC,TO.5,BLK	S.N.A
...3	BP60-00023A	SPACER-DUST1;SP50L2HX,PU FORM,,,,,13.0,,	S.N.A
...3	BP60-00024A	SPACER-DUST2;SP50L2HX,PU FORM,,,,,8.0,,	S.N.A
...3	BP60-00025A	SPACER-DUST3;SP50L2HX,PU FORM,,,,,10.0,,	S.N.A
...3	BP60-00026A	SPACER-DUST4;SP50L2HX,PU FORM,,,,,4.0,,	S.N.A
...3 T0050	BN47-00001A	LAMP-HID(PARA),TSB;PARABOLA,1.3MM,65*70,	
...3 T0049	BN47-00002A	LAMP-BALLAST(100),TSB;,100W,6000LM	
...3 T0051	BP96-00167A	ASSY LENS P-MECHA;,PANEL(DREAM 1.5),0.87	
...3	BN73-00048A	SILICON/RUBBER-BERGQUIST;L63A,SILICON,40	S.N.A
...3 CIS1	BP94-00514A	ASSY PCB S-INTERFACE;SP61L2HX/XEC,L63A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CN906	3711-000015	CONNECTOR-HEADER;BOX,2P,1R,2.5MM,STRAIGH	S.N.A
....4 CN906	3711-000577	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAIG	
....4 CN906	3711-003942	CONNECTOR-HEADER;BOX,2P,1R,2mm,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004379	CONNECTOR-HEADER;BOX,4P,1R,2MM,STRAIGHT,	S.N.A
....4	BP97-00513N	ASSY SMD-INTERFACE;SP61L2HX/XEC,L63A	S.N.A
.....5 QS02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QS01	0504-000154	TR-DIGITAL;KSR2102,PNP,200MW,10K/10K,SOT	
.....5 ICS01	0904-001031	IC-I/O SUPPORT CHIP;8574,8BIT,SOP,16P,-,	
.....5 RS07	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS08	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS09	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS13	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS15	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS03	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS04	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS05	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS06	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 RS35	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS36	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS37	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS38	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS34	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS01	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS31	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS32	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS33	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 RS23	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 RS22	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 RS21	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 CS20	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CS18	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CS14	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CS01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CS16	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	
.....5 CS03	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 CN906	3711-004934	CONNECTOR-HEADER;BOX,5P,1R,1.25MM,SMD-A,	
.....5 0	AA41-00677B	PCB;SP61L2HX/XEC,2,L63A,4	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 T0116	BP39-00032C	CBF-MDR CABLE;SP50L2HX,UL20276,UL,20P,23	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark

ASSY ACCESSORY

1	M0016	BP92-00511B	ASSY ACCESSORY;SP50L2HX/XEE,L63A	S.N.A
..2	CIS	4301-000103	BATTERY-ALKALINE;1.5V,750mAH,AAA,10.5x44	
..2		6801-001014	CARD-REGISTRATION;XEU,ENG,MOJO100,L150,W	S.N.A
..2	T0116	AA39-40001B	CABLE RCA;,1500MM	
..2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2	CIS S.N.A	BP68-00129A	MANUAL USERS;SP43L3HX/50L2HX,EN/SW/NR/DN	
..2	T0074	BP59-00025A	REMOCON;SP50L2HX,TM63,L63,48,G66718,ALAD	S.N.A

ASSY MISC-ENGINE SVC

1		BP91-00810A	ASSY MISC-ENGINE SVC;43 50 SVC ASSY,TO	S.N.A
..2	T0128	BP96-00271A	ASSY COVER P-LAMP TSB100;LCD SVC,LAMP AS	
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+PC,	S.N.A
...3		AA61-00136A	BRACKET-LAMP,CONNECT;436W,SECC,T1.0,-,-	S.N.A
...3	T0050	BN47-00001A	LAMP-HID(PARA),TSB;PARABOLA,1.3MM,65*70,	
...3		BN61-00177A	HOUSING-LAMP,HOLD;50L2HX,PPS V0,BLK	S.N.A
...3		BN61-00178A	HOLDER-LAMP;50L2HX,PPS V0,BLK	S.N.A
...3		BN61-00180A	BRACKET-LAMP,COVER;50L2HX,AL 1050S,T1.0	S.N.A
...3		BN64-00131A	HANDLE-LAMP;50L2,SUS	S.N.A
...3		BP96-00188A	ASSY MISC P-BRKT RAY;SP50L2HX/XEC,50L2	
....4		BP61-00164A	BRACKET-RAY;50L2,SPC,TO.5	S.N.A
....4		BP61-00182A	BRACKET-RAY2;50L2,SPC,TO.5,BLK	S.N.A
..2	T0125	BP96-00272A	ASSY COVER P-FAN;LCD SVC,FAN ASSY	
...3		AA63-00140A	SPACER-FAN;436W,CR SPONGE,-,-,-,BLK,-,-	S.N.A
...3	T0136	BP31-00001B	FAN;G9225L12B2-FS(WS),SP50L2HX,,,395mm W	

ASSY FIXING

1		BP91-00832Z	ASSY FIXING;3PANEL,L63A 43	S.N.A
..2	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	T0081	6003-000269	SCREW-TAPTITE;BH,+,S,M3,L6,ZPC(YEL),SWRC	S.N.A
..2	T0076	AA39-20010H	LEAD CONNECTOR-ASSY;,1P,300,YFH800-01S,	
⚠ ..2	T0066	AA96-20130K	ASSY POWER CORD;,CP2/NO(4.0R),H/S 700MM,	
..2	T0121	3301-001502	CORE-FERRITE;AE,16.5*ø7*ø30MM,-,-	

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

3-2 SP50L2HX/BWT

ASSY COVER FRONT

Loc. No.		Code No.	Description ; Specification	Remark
1	M0001	BP90-00012R	ASSY COVER FRONT;SP50L2HXX/BWT,L62A	S.N.A
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001233	SCREW-TAPTITE;PWH,+,P,M3,L8,ZPC(BLK),SWC	S.N.A
..2	LED+CM	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2	PCB+CM	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2		AA61-00678B	HOLDER-BOSS;43/50L2,HIPS,NTR,HB	S.N.A
..2		AA61-01138A	BRACKET-SCREEN,TOP;50,AL6063 EXTR,BLK	S.N.A
..2		AA61-01139A	BRACKET-SCREEN,SIDE;50,AL6063 EXTR,BLK	S.N.A
..2		AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
..2		AA65-30013A	CLAMPER CORE-WIRE;-,NYLON-66,V0,-,NTR,DA	S.N.A
..2		AA65-30102A	CLAMPER CORE-WIRE;-,NYLON,66,-,GRAY,-	S.N.A
..2	T0054	AA67-00169A	SCREEN LENTI;LENTICUALR,50W,MS,1128*647,	
..2	T0053	AA67-00172A	SCREEN FRESNEL;50W,MS,1128*647,T1.35,P,5	
..2		BP61-00084A	HOLDER-BACK,RIGHT;507W,HIPS V0,GRAY	S.N.A
..2		BP61-00085A	HOLDER-BACK,LEFT;507W,HIPS V0,GRAY	S.N.A
..2		BP63-00034A	COVER-DECO,L;50L2,ABS,HB,BLK,SV-704P 820	S.N.A
..2		BP63-00038A	COVER-DECO,PAL;50L2,PAL,ABS,HB,BLK,SV-70	S.N.A
..2	CIS1	BP96-00131G	ASSY COVER P-GRILLE;50L2,EUP,HIPS,HB,G43	S.N.A
...3	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
...3		AA61-00206A	MAGNET-GRILLE;43J6,PI15X3T,-,-,-,-	S.N.A
...3		AA61-00650B	HOLDER-MAGNET,TOP;50L2,ABS,HB,G3676	S.N.A
...3		BP63-00012A	COVER-GRILLE;507W,HIPS,HB,GRAY	S.N.A
...3		BP63-00013A	COVER-DECO,LED;507W,ABS HB,BLK	S.N.A
...3	T0059	BP64-00071A	INDICATOR LED;507W,ACRYL	S.N.A
...3		BP64-00096D	WINDOW-LED;50L2,GUJU,ACRLY,T2.0,HALF MIR	S.N.A
...3	T0069	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
..2	T0158	BP96-00213A	ASSY COVER P-MAIN;50L2,EUP,HIPS V0,BLK,S	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
...3		AA61-00165B	BRACKET-GRILLE;43J6,SECC-1,T1.0,-,-,BLK,	S.N.A
...3		AA61-00852B	BRACKET-SUPPORT,R;50J6,SECC-1,T1.6,NTR	S.N.A
...3		AA61-00853B	BRACKET-SUPPORT,L;50J6,SECC-1,T1.6,NTR	S.N.A
...3		AA63-60117A	SPACER-FOOT;SVP403J,NEOPRENE,-,-,-,BLK,-	S.N.A
...3	T0069	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
...3		AA64-00548D	CABINET-MAIN;43J6,HIPS,V0,GRY	S.N.A
...3		AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3		AA65-30102A	CLAMPER CORE-WIRE;-,NYLON,66,-,GRAY,-	S.N.A
...3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3		BP61-00082A	HOLDER-FRONT,RIGHT;507W,HIPS HB,GRAY	S.N.A
...3		BP61-00083A	HOLDER-FRONT,LEFT;507W,HIPS HB,GRAY	S.N.A
...3	CIS5	BP96-00189A	ASSY SPEAKER P;8 OHM,001144,001282,00121	S.N.A
....4	T0082	3001-001144	SPEAKER;25W,7OHM,88DB,1.6KHZ	
....4	T0082	3001-001216	SPEAKER;15W,8OHM,90+-2 DB/W/0.5 M,150HZ	
....4	T0082	3001-001282	SPEAKER;25W,8OHM,90DB,55HZ	
....4	T0076	AA39-00086A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC	
....4		BP39-00021A	LEAD CONNECTOR;L63A/SP50L2H,UL1007#22,UL	
.....5	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
.....5	T0121	3301-001502	CORE-FERRITE;AE,16.5" ø7" ø30MM,-,-	
...3	T0069	AA60-00091G	SPACER-FELT;-,FELT,200X10,-,-,BLK,T0.5,-	S.N.A
..2		BP61-00198A	BRACKET-FRONT;50L2,SECC-1,T1.6,,,BLK,	S.N.A
..2		BP61-00199A	BRACKET-FRONT,KNOB;50L2,SECC-1,T1.6,,,BL	S.N.A
..2	T0003	BP96-00146G	ASSY COVER P-FRONT;50L2,LCD(GUJU),HIPS H	
...3	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3		AA64-01789F	CABINET-FRONT;50L2,GUJU,HIPS,HB,G4309,SV	S.N.A
...3	CIS6	AA64-01790B	CABINET-MIDDLE;50L2,HIPS,HB,G4309,SV-012	
...3	T0102	AA73-00005B	RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT	S.N.A
...3		BP63-00032A	COVER-DECO,TOP;50L2,ABS,HB,BLK,SV-704P 1	S.N.A
...3	T0057	BP64-00177A	BADGE-BRAND;ALL,AL,T1.5,70,11.3,,BLK,SIL	S.N.A

ASSY COVER REAR

1	M0002	BP90-00013C	ASSY COVER REAR;SP50L2HX/XEC,L62A	S.N.A
..2		AA61-00443B	BRACKET-MIRROR,TOP;ST-50J6,SECC,T1.6,-,-	S.N.A
..2		AA61-00444B	BRACKET-MIRROR,SIDE;ST-50J6,SECC,T1.6,-,	S.N.A
..2		AA61-00445B	BRACKET-MIRROR,BOT;ST-50J6,SECC,T1.6,-,-	S.N.A
..2		AA63-00021E	SPACER-MIRROR;SP-434JMF,PVC,-,-,-,BLK,-,	S.N.A
..2		AA63-00021K	SPACER-MIRROR;50J6,PVC,BLK,HB L500	S.N.A
..2		AA63-00196C	COVER-DUST;50J6,HIPS,V0,GRAY G4309	S.N.A
..2		AA63-00212C	COVER-CONNECTOR;,HIPS,V0,GRAY G4309	S.N.A
..2	T0112	AA63-00599A	COVER-BACK;507W,HIPS,V0,GRY,G4309	
..2	T0112	AA64-00698B	CABINET-BACK,TOP;50J6,HIPS,V0,GRY,G4309	
..2		BP64-00070A	INLAY-COVER,BACK;,PS SHEET,T0.5,DG703P	S.N.A
..2		BP64-00075C	INLAY-A/V;50L2,GUJU,PS SHEET,T0.3,DG703P	S.N.A
..2		BP96-00184A	ASSY COVER P-BACK,BOT;SP50L2,HIPS V0 G43	S.N.A
...3		AA61-10379B	BRACKET-COVER;SP43J6,SECC-1,T1.0,-,-,-,-	S.N.A
...3	T0112	AA64-00547C	CABINET-BACK,BOT;43L2,HIPS,V0,G4309	
...3		AA64-00578B	INLAY-LAMP;43J6,PS SHEET,T0.3,-,-,BLK,-	S.N.A
...3		BN63-00332A	COVER-LAMP;50L2HX,HIPS,V0,G4309	S.N.A
...3		BN63-00363A	COVER-DUCT,LAMP;50L2HX,PC ABS,V0,BLK	S.N.A
...3	T0069	AA63-00099B	SPACER-FELT;43J6,FELT,-,-,-,BLK,T1.0,-,8	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00553C	BRACKET-METAL GRILL;SECC-1,43L2,T1.0,BLK	S.N.A
..2		AA61-00524B	BRACKET-SUPPORT;43J6,SECC-1,T1.6,-,-,CLR	S.N.A
..2	T0134	BP67-00041A	MIRROR-FRONT,DM1;50,GLASS,922*547*512*3	
..2	T0130	BP96-00178A	ASSY COVER P-TERMINAL BOARD;50L2,LCD,HIP	S.N.A
...3		BN61-00242A	HOLDER-TERMINAL;HIPS V0,HLM4365W,G4309,3	S.N.A
...3		BN64-00115A	INLAY-TERMINAL,PAL;HLM4365,PS SHEET ,T0.	S.N.A

ASSY MISC-ENGINE,MECHA

1		BP91-00760B	ASSY MISC-ENGINE,MECHA;SP50L2HX/XEC,L63A	S.N.A
..2	CIS1	BP96-00185A	ASSY ENGINE P-LCD TI50;50 LCD,TOSHIBA	

Loc. No.	Code No.	Description ; Specification	Remark
...3 T0081	6003-000279	SCREW-TAPTITE;BH,+,B,M3,L20,ZPC(YEL),SWC	S.N.A
...3 T0081	6003-000279	SCREW-TAPTITE;BH,+,B,M3,L20,ZPC(YEL),SWC	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000365	SCREW-TAPTITE;BH,+,S,M3,L8,ZPC(YEL),SWRC	S.N.A
...3 T0081	6003-000365	SCREW-TAPTITE;BH,+,S,M3,L8,ZPC(YEL),SWRC	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00136A	BRACKET-LAMP,CONNECT;436W,SECC,T1.0,-,-,	S.N.A
...3	AA63-00140A	SPACER-FAN;436W,CR SPONGE,-,-,-,BLK,-,-,	S.N.A
...3 CIS5	AA91-00294A	ASSY-FILTER;-,V0,PU-FORM BLK 43J6	
....4	AA60-00032A	SPACER-FILTER;50J6,P/U-FOAM V0 16,-,-,-,	S.N.A
....4	AA61-00160B	HOLDER-FILTER;43J6,ABS,-,-,-,BLK,V0	S.N.A
...3	BN61-00174A	HOUSING-MECHA,BASE;50L2HX,ABS V0,BLK	S.N.A
...3	BN61-00176A	HOUSING-LAMP,MOUNT;50L2HX,PPS V0,BLK	S.N.A
...3	BN61-00177A	HOUSING-LAMP,HOLD;50L2HX,PPS V0,BLK	S.N.A
...3	BN61-00178A	HOLDER-LAMP;50L2HX,PPS V0,BLK	S.N.A
...3	BN61-00179A	GUIDE-LAMP;50L2HX,SECC,T1.0	S.N.A
...3	BN61-00180A	BRACKET-LAMP,COVER;50L2HX,AL 1050S,T1.0	S.N.A
...3	BN61-00211A	HOLDER-BALLAST;50L2HX,ABS V0,BLK	S.N.A
...3	BN61-00222A	BRACKET-FAN;50L2HX,SECC,T1.0	S.N.A
...3	BN63-00328A	COVER-DUCT,TOP;50L2HX,ABS,V0,BLK	S.N.A
...3	BN64-00131A	HANDLE-LAMP;50L2,SUS	S.N.A
...3 T0136	BP31-00003A	FAN;G5015S12B2-RS(WS),SVP-61L2H,PBTP,WIR	
...3	BP60-00018A	SPACER-LENS;50L2,PU FORM V0,BLK	S.N.A
...3	BP60-00020A	SPACER-DUCT,OUT;50L2,CR SPONGE,BLK	S.N.A
...3	BP61-00153A	BRACKET-RMC;B3K,SECC T=1.0	S.N.A
...3	BP91-00766A	ASSY MISC-REMOCON;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 DZ016	0403-001331	DIODE-ZENER;MTZJ6.8A,6.29-6.63V,500mW,DO	
....4 R01	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C598	2201-000982	C-CERAMIC,DISC;10NF,+80-20%,50V,Y5V,TP,4	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 CN906	3711-004386	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	S.N.A
....4 PCB	AA41-00840A	PCB-REMOCON;SP50L2HX,FR-1,1L,A,1.6T,245X	S.N.A
....4 PRE01	BN32-00003A	MODULE REMOCON;346HF7,38KHZ,940NM,13*10*	
....4	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
....4 CN01A	BP39-00089A	LEAD CONNECTOR;SP50L2HX,UL2547#26,UL/CSA	
...3	BP91-00767A	ASSY MISC-DETECTOR S/W;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 SW1	3409-000178	SWITCH-LEVER;12V,100mA,SPDT,-,27deg	
....4 CCM	6001-001003	SCREW-MACHINE;BH,+,M2.6,L6,ZPC(BLK),SWRC	S.N.A
....4	AA41-00756A	PCB-COVER PROTERCTION;HLM507W/SPL,CEM-1,	S.N.A
....4	AA61-10185A	BRACKET-SENSOR;L3300,SECC,T1.0,-,-,-,-	S.N.A
....4 CN1	BP39-00026B	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#26,U	
...3	BP39-00075A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#26,U	
...3	BP39-00076A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#26,U	
...3	BP39-00078A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#22,U	
...3	BP39-00080A	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#26,U	
...3	BP63-00039A	COVER-LENS;50L2,HIPS V0 BLK	S.N.A
...3	BP96-00186A	ASSY MISC P-SHIELD CASE,TOP;SP50L2HX/XEC	S.N.A
....4	BN63-00333A	SHIELD-CASE,TOP;50L2HX,SPTE,T0.3	S.N.A
....4	BP63-00043A	SHIELD-CASE,PANEL;50L2,PBT,TO.2	S.N.A
...3	BP96-00187A	ASSY MISC P-SHIELD CASE,BOT;SP50L2HX/XEC	S.N.A
....4	BN63-00334A	SHIELD-CASE,BOT;50L2HX,SPTE,T0.5	S.N.A
....4	BP63-00044A	SHIELD-CASE,DUST;50L2,SPTE,TO.5	S.N.A
...3	BP96-00188A	ASSY MISC P-BRKT RAY;SP50L2HX/XEC,50L2	
....4	BP61-00164A	BRACKET-RAY;50L2,SPC,T0.5	S.N.A
....4	BP61-00182A	BRACKET-RAY2;50L2,SPC,TO.5,BLK	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3	BP61-00163A	BRACKET-DUST;50L2,SPC,T0.5	S.N.A
...3	BP62-00016A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,36.2,	S.N.A
...3	BP61-00165A	BRACKET-EARTH;50L2,AL,T1.0	S.N.A
...3 CIS4	BP94-00474A	ASSY PCB S-LCD DRIVER;SP50L2HX/XEC,L63A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CNL101	3702-001137	CONNECTOR-RIBBON;20P,FEMALE,STRAIGHT,AU1	
....4 CN906	3711-001154	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	S.N.A
....4	BP97-00188A	ASSY SMD;0	S.N.A
.....5 DL109	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL108	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL107	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL110	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL171	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL172	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL101	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL102	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL103	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL104	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL105	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 DL106	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5 IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
.....5 IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5 IC107	1002-001334	IC-D/A CONVERTER;M62392FP,8BIT,SOP,24P2	
.....5 ICL501	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5 ICL401	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5 ICL301	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5 IC112	1103-001147	IC-EEPROM;24256,256KBIT,SOP,8P,150MIL,-,	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5 DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5 DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5 DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL	
.....5 DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL	
.....5 DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL	
.....5 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
.....5 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
.....5 IC012	1203-002470	IC-POSI.ADJUST REG.;FAN1616AS25X,SOT-223	
.....5 ICL202	1203-002709	IC-VOL. REFERANCE;MAX875BCSA,SOIC,8P,49	
.....5 IC118	1204-001975	IC-VIDEO PROCESS;L3E07050K0A,QFP,176P,24	
.....5 RL302	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL301	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL270	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL269	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL268	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL267	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL266	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL265	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL262	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL340	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL542	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL540	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL502	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL501	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL442	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL440	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL402	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL401	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL342	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL261	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL126	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL125	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL107	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL106	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 RL105	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL104	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL103	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL102	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL101	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL128	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL260	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL259	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL258	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL257	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL256	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL130	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL131	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL133	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL251	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5 RL264	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RL263	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RL113	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RL112	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RL115	2007-000080	R-CHIP;2KOHM,5%,1/10W,TP,1608	
.....5 RL134	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5 RL129	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5 RL207	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RL206	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RL205	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RL204	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RL203	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RL202	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RL201	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RL546	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5 RL544	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5 RL446	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5 RL353	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5 RL355	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5 RL444	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5 RL121	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5 RL122	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5 RL123	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5 RL124	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5 RL117	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5 RL118	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5 RL119	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5 RL120	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5 RL447	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL445	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL360	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL358	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL356	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL449	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL551	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL549	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL547	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL545	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL451	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL248	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL246	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL242	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL241	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL240	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL249	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL354	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL255	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL254	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL252	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL250	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5 RL247	2007-000701	R-CHIP;3.6Kohm,1%,1/16W,DA,TP,1608	
.....5 RL245	2007-000701	R-CHIP;3.6Kohm,1%,1/16W,DA,TP,1608	
.....5 RL553	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5 RL552	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5 RL453	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5 RL361	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5 RL362	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5 RL452	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5 RWL101	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW216	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW215	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW214	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 RW213	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL102	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL107	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL106	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL105	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL104	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RWL103	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW212	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW205	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW204	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW203	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW202	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW201	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW206	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW211	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW210	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW209	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW208	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RW207	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 CL240	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
.....5 CL104	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
.....5 CL443	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL441	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL408	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL508	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL541	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL543	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL342	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL202	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL207	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL215	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL217	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL308	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL341	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5 CL184	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CL174	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CL171	2402-001044	C-AL,SMD;100UF,20%,25V,GP,TP,8.3X8.3X6.3	
.....5 CL216	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
.....5 CL126	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
.....5 CL117	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
.....5 CL107	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
.....5 CL106	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
.....5 CL206	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 CL201	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm 20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 CNL501	3708-001505	CONNECTOR-FPC/FFC/PIC;36P,0.5mm,SMD-A,SN	
.....5 CNL401	3708-001505	CONNECTOR-FPC/FFC/PIC;36P,0.5mm,SMD-A,SN	
.....5 CNL301	3708-001505	CONNECTOR-FPC/FFC/PIC;36P,0.5mm,SMD-A,SN	
.....5 PCB	AA41-00673A	PCB-LCD DRIVER;3P LCD,FR-4,6L,A,1.6T,180	S.N.A
.....5 ICL103	1205-002183	IC-RECEIVER;SII161BCT100,TQFP,100P,14X14	
.....5 RL127	2007-000118	R-CHIP;390OHM,5%,1/10W,TP,1608	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	BP91-00773G	ASSY MISC-THERMOSTAT;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CN906	3711-000056	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,S	S.N.A
....4 CN2	4712-001011	THERMOSTAT;125/250V,15A/7.5A,105+-5C,95+	
....4	BP39-00043B	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#22,U	
....4 0	AA41-00801C	PCB;HLM507W,2,2,1.6mm,40mm*15mm,L62A,30	S.N.A
...3 T0136	BP31-00001B	FAN;G9225L12B2-FS(WS),SP50L2HX,,,395mm W	
...3	BP61-00197A	BRACKET-EMI,LCD;SP50L2HX,PBT,0.2,,,,	S.N.A
...3	AA65-30102A	CLAMPER CORE-WIRE;-,NYLON,66,-,GRAY,-	S.N.A
...3	BP60-00023A	SPACER-DUST1;SP50L2HX,PU FORM,,,,,13.0,,	S.N.A
...3	BP60-00024A	SPACER-DUST2;SP50L2HX,PU FORM,,,,,8.0,,	S.N.A
...3	BP60-00025A	SPACER-DUST3;SP50L2HX,PU FORM,,,,,10.0,,	S.N.A
...3	BP60-00026A	SPACER-DUST4;SP50L2HX,PU FORM,,,,,4.0,,	S.N.A
...3 T0051	AA96-01084A	ASSY LENS P-MECHA;SP50L2HX/XEC,L63A	
...3 T0050	BN47-00001A	LAMP-HID(PARA),TSB;PARABOLA,1.3MM,65*70,	
...3 T0049	BN47-00002A	LAMP-BALLAST(100),TSB;,100W,6000LM	
...3	BN73-00048A	SILICON/RUBBER-BERGQUIST;L63A,SILICON,40	S.N.A
...3 CIS1	BP94-00514A	ASSY PCB S-INTERFACE;SP61L2HX/XEC,L63A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CN906	3711-000015	CONNECTOR-HEADER;BOX,2P,1R,2.5MM,STRAIGH	S.N.A
....4 CN906	3711-000577	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAIG	
....4 CN906	3711-003942	CONNECTOR-HEADER;BOX,2P,1R,2mm,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004379	CONNECTOR-HEADER;BOX,4P,1R,2MM,STRAIGHT,	S.N.A
....4	BP97-00513N	ASSY SMD-INTERFACE;SP61L2HX/XEC,L63A	S.N.A
.....5 QS02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QS01	0504-000154	TR-DIGITAL;KSR2102,PNP,200MW,10K/10K,SOT	
.....5 ICS01	0904-001031	IC-I/O SUPPORT CHIP;8574,8BIT,SOP,16P,-,	
.....5 RS07	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS08	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS09	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS13	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS15	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS02	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS03	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS04	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS05	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS06	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RS35	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS36	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS37	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS38	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS34	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS01	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS31	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS32	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS33	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RS23	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5 RS22	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5 RS21	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5 CS20	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CS18	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CS14	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CS01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 CS16	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	
.....5 CS03	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5 CN906	3711-004934	CONNECTOR-HEADER;BOX,5P,1R,1.25MM,SMD-A,	
.....5 0	AA41-00677B	PCB;SP61L2HX/XEC,2,L63A,4	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 T0116	BP39-00032C	CBF-MDR CABLE;SP50L2HX,UL20276,UL,20P,23	S.N.A

ASSY CHASSIS

1 M0017	BP91-00770E	ASSY CHASSIS;SP50L2HX/BWT,L63A	S.N.A
..2 T0137	AA94-11921A	ASSY PCB MISC-LINE FILTER;L62A	S.N.A
⚠ ...3 CX813S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
⚠ ...3 CX812S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
⚠ ...3 CX811S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
⚠ ...3 LX813S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.1OHM,1.5K	
⚠ ...3 LX812S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.1OHM,1.5K	
⚠ ...3 LX811S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.1OHM,1.5K	
...3	AA97-12826A	ASSY AUTO;L62A	S.N.A
⚠ 4 VX811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
⚠ 4 RX811S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
....4 FP811B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 FP811A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 GT808	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT809	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT807	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT806	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT805	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT804	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 EY801	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY802	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY803	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY804	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY805	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY806	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY807	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY808	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY809	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY810	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY811	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY812	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY813	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY814	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY815	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY816	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY817	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY818	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY819	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY820	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY821	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY822	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 PCB	AA41-00697A	PCB-LINE FILTER;SVP-50L2H,CEM-1,1L,A,1.6	S.N.A
⚠ ...3 FP811S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3 NT811S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2 CIS3	BP94-00008A	ASSY PCB MISC-BACK TERMINAL;ALADDIN,3P L	
...3 CN906	3711-004059	CONNECTOR-HEADER;BOX,30P,2R,2mm,ANGLE,SN	S.N.A
...3 JT701	3722-000498	JACK-SCART;21P,-,SN,BLK,NO	
...3 JT603	3722-001921	JACK-PIN;3P(6P),-,NI,WHT/RED/BLK,-	
...3 JT702	AA63-40276A	TERMINAL-SPK,JACK;4P,ABS VO,4,BLK	S.N.A
...3	BP97-00295A	ASSY AUTO;0	S.N.A
....4	BP97-00192A	ASSY SMD;0	S.N.A
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 RT02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.....5 RT01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.....5 RT04	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5 LT06	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT07	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT23	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT24	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT25	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT01	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT02	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT03	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT04	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 LT05	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5 PCB	AA41-00676A	PCB-TERMINAL;3P LCD,FR-4,2L,A,1.6T,196X9	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 GT701	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 LT22	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 LT21	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CT701A	BP39-00087A	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#26,U	
..2 CIS1	BP94-00010A	ASSY PCB MISC-SIDE KEY CONTROL;ALADDIN,3	
...3 SW07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 CN906	3711-001031	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,ANGLE,S	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0024	AA64-01793B	KNOB-FAMILY;43L2,ABS,HB,G3676,SVM-3012	
...3 T0138	AA64-01794B	KNOB-HOLDER;43L2,ABS,HB,G3676,VACCUM PLA	
...3	BP97-00305A	ASSY AUTO;0	S.N.A
....4 RY07	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RY03	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY05	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY02	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY01	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY06	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY04	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 PCB	AA41-00678A	PCB-SIDE KEY CONTROL;3P LCD,FR-1,1L,A,1.	S.N.A
...3 CNY02A	BP39-00074A	LEAD CONNECTOR;L63A/SP50L2HX,UL2835#28,U	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2 CIS2	BP94-00011A	ASSY PCB MISC-SIDE A/V;ALADDIN,3P LCD PJ	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 JAP01	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
...3 JAP02	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
...3	BP97-00302A	ASSY AUTO-SIDE A/V;SP61L2HX/XEC,L63A	S.N.A
....4 RP03	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RP02	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 LP02	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
....4 LP01	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
....4 PCB	AA41-00789A	PCB-50/61 RCA JACK;3PLCD,FR-1,1L,A,16T	S.N.A
...3 CN906	3711-000616	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	S.N.A
...3 CN108A	BP39-00077A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#26,U	
..2 T0133	BP94-00085A	ASSY PCB POWER;SP50L2HX,L63A	
...3 T0083	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
...3 T0083	0402-001191	DIODE-RECTIFIER;MUR460,600V,4A,CAS267-0	
⚠ ...3 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
⚠ ...3 PC802S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F4P,-,	
...3 T0086	1203-001733	IC-PWM CONTROLLER;254,DIP,8P,300MIL,PLAS	
...3 T0086	1203-002268	IC-PWM CONTROLLER;ML4824,PDIP,16P,150MIL	
...3 C598	2201-000173	C-CERAMIC,DISC;10NF,10%,500V,Y5P,BK16X4	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,5X6	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,5X6	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,5X6	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,5X6	
...3 C857	2301-001456	C-FILM,MPE-PPF;5.1nF,5%,1.6kV,TP,29x9x6	
⚠ ...3 CX801S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
...3 C701	2401-003031	C-AL;470uF,20%,450V,GP,BK,35x45mm,1	
...3 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,28G	
⚠ ...3 RL801S	3501-001053	RELAY-POWER;5VDC,530MW,10000MA,TORMA,15	
⚠ ...3 FD801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3 TS801S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,A80~280V	
...3 HS803	AA96-00353C	ASSY H/S;,POWER,AA62-00066A,KA78R2,KA27	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-IL	
....4 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4 CIS	AA62-00066A	HEAT SINK-PS;-,AL,T1.0,SILVER,-,-,NATUR	S.N.A
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
...3 D801S	AA96-50310A	ASSY H/S;-,POWER,AA62-30150C,RBV60-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL,SW	S.N.A
....4	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
....4	AA62-30150C	HEAT SINK-ES;-,A6063 EXTR,-,WHT,40(24)	S.N.A
...3 L802	BH27-00027A	COIL-CHOKE-1;CH-1215E,8.5uH,-,DR1215-7	
...3 L804	BH27-00027A	COIL-CHOKE-1;CH-1215E,8.5uH,-,DR1215-7	
⚠ ...3 T801S	BP26-00007A	TRANS SWITCHING;EER3543,L62A,HLL5CW,80-	
...3 PFT801	BP26-00008A	TRANS-PFC;ER-4042,L62A,14P,800UH,2.4UH,	
...3 L801	BP26-00009A	TRANS-MULTI CHOKE;EER2834,L62A,12P,3UH,	
...3 CN801	BP39-00019A	LEAD CONNECTOR;L62A/HLM507WX,UL1007#26,U	
⚠ ...3 HS801S	BP96-00085A	ASSY HEAT SINK P;H/S,SCREW,FQAF10N0,FFP	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0083	0402-001358	DIODE-RECTIFIER;FFPF10U60S,600V,10A,TO-2	
....4 CIS	0505-001683	FET-SILICON;FQAF16N50,N,500V,11.3A,0.3O	
....4 CIS	0505-001684	FET-SILICON;FQAF10N80,N,800V,6.7A,1.0OH	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL,SW	S.N.A
....4 CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBG	S.N.A
....4 CIS	BP62-00012A	HEAT SINK-ES;L62A,A6063S,T2.4,30,88	S.N.A
...3	BP97-00286A	ASSY AUTO;0	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 DSP802	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP803	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP805	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP807	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D815	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D822	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D824	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D825	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DSP801	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D821	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000532	DIODE-RECTIFIER;ERC13-08,800V,1.2A,DO-20	
....4 T0083	0402-000532	DIODE-RECTIFIER;ERC13-08,800V,1.2A,DO-20	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
....4 DZ016	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DS802	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DSZ805	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DSZ804	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 QSP802	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QSP804	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
....4 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 QSP803	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QSP801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4 R828	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R812	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R847	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R841	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R808	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R846	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R849	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R840	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R848	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP803	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP801	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R860	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R837	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R822	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R836	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP807	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS804	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R819	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP806	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R843	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R844	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R809	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP809	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP808	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP805	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R859	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP802	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP804	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS805	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS803	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS802	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R839	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R804	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R825	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R842	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R807	2001-001070	R-CARBON(S);120OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R858	2001-001070	R-CARBON(S);120OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R818	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R806	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R823	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R824	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R829	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
....4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
....4 R864	2003-000537	R-METAL OXIDE(S);1Kohm,5%,1W,AF,TP,3.3x9	
....4 R865	2003-000537	R-METAL OXIDE(S);1Kohm,5%,1W,AF,TP,3.3x9	
....4 R815	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
....4 R803	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R805	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R857	2003-000755	R-METAL OXIDE(S);6.8Kohm,5%,2W,AF,TP,4x1	
....4 R856	2003-000755	R-METAL OXIDE(S);6.8Kohm,5%,2W,AF,TP,4x1	
....4 R852	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R853	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R854	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R855	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R813	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R816	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R817	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R851	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R814	2003-001093	R-METAL OXIDE(S);12Kohm,5%,2W,AF,TP,3.9x	
....4 RS801	2003-002194	R-METAL OXIDE(S);1.8Kohm,5%,1W,AF,TP,2.5	
....4 R835	2003-002216	R-METAL OXIDE(S);1.2Kohm,5%,2W,AF,TP,3.9	
....4 R863	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R862	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R861	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R834	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R821	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R811	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R810	2004-001396	R-METAL(S);390Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R826	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R801	2004-002017	R-METAL(S);190Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R802	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R833	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RSF801	2008-001050	R-FUSIBLE;22ohm,5%,2W,AF,TP,3.9x10mm	
....4 R845	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 R832	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 R827	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 C598	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 C803	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
....4 C855	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
....4 C823	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C835	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C822	2301-001211	C-FILM,PPF;22nF,5%,400V,TP,20x7x14,7.5mm	
....4 C826	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
....4 C809	2305-000411	C-FILM,MPEF;470nF,5%,50V,TP,7.3x4.8x5.5m	
....4 C851	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C845	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C844	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C841	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C832	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C816	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C811	2305-001023	C-FILM,MPEF;680nF,10%,63V,TP,7.5x5.5x14.	
....4 CS802	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002042	C-AL;220uF,20%,10V,GP,TP,6.3x11,5	
....4 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003704	C-AL;1UF,° æ20%,100V,WT,TP,5X11MM,5	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
⚠ 4 FD802S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
....4 FD801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 FD801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 PCB	AA41-00839A	PCB-POWER;SP50L2HX,FR-4,2L,A,1.6T,245X33	S.N.A
....4 GT806	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT805	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT804	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
⚠ ...3 HS802S	BP96-00084B	ASSY HEAT SINK P;H/S,SCREW,UGF10GCT,FFPF	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0083	0402-001383	DIODE-RECTIFIER;MBRF10100CT,100V,10A,ITO	
....4 T0083	0402-001446	DIODE-RECTIFIER;FFPF10U20DN,200V,10A,TO-	
....4 T0083	0402-001546	DIODE-RECTIFIER;UGF10GCT,400V,10A,ITO-22	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4 CIS	BP62-00011A	HEAT SINK-ES;L62A,A6063S,T2.0,26.60	S.N.A
⚠ ...3 PD801S	BP39-00086A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#22,U	
...3	6103-001055	SUPPORTER;DAMT-4N,L2,NTR,NYLON6/6	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 C701	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
..2 T0137	BP94-00137G	ASSY PCB MISC-LED;SP50L2HX/XEC,L63A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-004484	CONNECTOR-HEADER;BOX,5P,1R,2mm,STRAIGHT,	S.N.A
...3	AA41-00699A	PCB-LED;SVP-50L2H,FR-1,1L,A,1.6T,245X245	S.N.A
...3 DL01	AA96-30001C	ASSY LED GUIDE;-,AA61-50055A,DL-G7RA,-	S.N.A
...3 DL03	AA96-30007A	ASSY LED GUIDE;-,AA61-50055A,DL-G7GA,GRE	S.N.A
...3 DL02	AA96-30007A	ASSY LED GUIDE;-,AA61-50055A,DL-G7GA,GRE	S.N.A
...3	BP39-00085A	LEAD CONNECTOR;L63A/SP50L2HX,UL2835#28,U	
..2 CIS	BP94-00137H	ASSY PCB MISC-MASTER S/W;L63A, ALADDIN	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
⚠ ...3 SW811S	3403-000179	SWITCH-PUSH;250V,5A,DPST,-,JPW-2104B	
...3 T0076	AA39-20179B	LEAD CONNECTOR-ASSY;,3(2)P,200MM,YFH800-	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3 CIS2	BP96-00147B	ASSY COVER P-KNOB,MASTER;,ABS HB,GRAY,SV	
....4 CIS7	AA61-60003E	SPRING ETC-CS;-,SUS304,-,-,OD8,N5,OD8,-,	S.N.A
....4 T0025	AA64-01795D	KNOB-MASTER;50L2,ABS,HB,GRAY,SVM-3012	S.N.A
....4	BP61-00086A	HOLDER-KNOB;507W,ABS HB,GRAY	S.N.A
...3	BP97-00355A	ASSY AUTO;SVP-42L2,50L2,L62A	S.N.A
....4 GT1	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT2	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT3	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 EY1	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY2	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY3	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY4	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4	AA41-00783B	PCB-MASTER;SVP50L2HX,FR-1,1L,B,1.6T,245X	S.N.A
...3 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 CIS	BP95-00067A	ASSY SUB-AUDIO;ALADDIN PROJECT	
...3 CND601	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	
...3 LD607	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD608	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD609	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD610	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD603	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD604	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD605	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD606	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 IC602	BP96-00141A	ASSY HEAT SINK P;H/S,SPRING,TA2020,OIL S	S.N.A
...3 IC603	BP96-00141A	ASSY HEAT SINK P;H/S,SPRING,TA2020,OIL S	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0085	1201-001885	IC-AUDIO AMP;TA2020-020,SSIP,32P,649MIL,	
....4 CIS	BP61-00129A	BRACKET-TR;,617W,T0.4,SUS-1	S.N.A
....4 CIS	BP62-00013A	HEAT SINK-PS;HLM507W,A1050S,T1.0,21,44.6	S.N.A
...3	BP97-00189A	ASSY AUTO;ALADDIN PROJECT	S.N.A
....4 RD631	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 RD630	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 RD629	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 RD628	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 CD668	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD667	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD666	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD670	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD671	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD672	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD649	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD650	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD651	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD657	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD656	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD654	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD674	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD673	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD669	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD642	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD653	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD658	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C701	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4	BP97-00158A	ASSY SMD;ALADDIN PROJECT	S.N.A
.....5 DD601	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 DD602	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 QD602	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT23,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 QD601	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 RD641	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RD640	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RD619	2007-000075	R-CHIP;220OHM,5%,1/10W,TP,1608	
.....5 RD618	2007-000075	R-CHIP;220OHM,5%,1/10W,TP,1608	
.....5 RD616	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
.....5 RD615	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
.....5 RD614	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
.....5 RD613	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
.....5 RD609	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD608	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD607	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD610	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD611	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD612	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD601	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD602	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD603	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD606	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD605	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD604	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD642	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RD638	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RD637	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RD633	2007-000093	R-CHIP;20KOHM,5%,1/10W,TP,1608	
.....5 RD632	2007-000093	R-CHIP;20KOHM,5%,1/10W,TP,1608	
.....5 RD627	2007-000093	R-CHIP;20KOHM,5%,1/10W,TP,1608	
.....5 RD626	2007-000093	R-CHIP;20KOHM,5%,1/10W,TP,1608	
.....5 RD622	2007-000097	R-CHIP;47KOHM,5%,1/10W,TP,1608	
.....5 RD643	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RD617	2007-000121	R-CHIP;820OHM,5%,1/10W,TP,1608	
.....5 RD621	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
.....5 RD620	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
.....5 RD623	2007-001175	R-CHIP;8.2Kohm,1%,1/16W,DA,TP,1608	
.....5 RD636	2007-001175	R-CHIP;8.2Kohm,1%,1/16W,DA,TP,1608	
.....5 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000697	C-CERAMIC,CHIP;0.002NF,0.25PF,50V,C0G,TP	
.....5 C120	2203-000697	C-CERAMIC,CHIP;0.002NF,0.25PF,50V,C0G,TP	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 LD611	2703-002327	INDUCTOR-SMD;3.9UH,55,3.2X2.5X2.2MM	
.....5 LD602	2703-002327	INDUCTOR-SMD;3.9UH,55,3.2X2.5X2.2MM	
.....5 LD601	2703-002327	INDUCTOR-SMD;3.9UH,55,3.2X2.5X2.2MM	
.....5 XD601	2801-003843	CRYSTAL-SMD;18.432MHz,30ppm,28-AAN,20pF,	
.....5 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
.....5 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
.....5 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
.....5 RD624	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
.....5 RD625	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
.....5 RD634	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
.....5 RD635	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
.....5 IC601	1204-002054	IC-SOUND PROCESSOR;MSP3452G-B3,PQFP,80P,	
.....5 RD644	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5 RD639	2007-000130	R-CHIP;39KOHM,5%,1/10W,TP,1608	
.....5 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
.....5 0	AA41-00704B	PCB;SP43L2HX/50L2HX,2,L63A,2	S.N.A
....4 C701	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4 C701	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4 RD645	2003-002288	R-METAL OXIDE(S);2.2KOHM,5%,2W,AF,TP,3 9	
....4 RD646	2003-002288	R-METAL OXIDE(S);2.2KOHM,5%,2W,AF,TP,3.9	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
...3	0202-000187	SOLDER-WIRE FLUX-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2 T0132	BP94-00139Z	ASSY PCB MISC-DIGITAL;SP50L2HXX/SAP,L63A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SW902	3404-000176	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3 JA401	3701-000003	CONNECTOR-DSUB;15P,3R,FEMALE,ANGLE,AUF	
...3 JA402	3701-001221	CONNECTOR-DSUB;24P+4P,3R,FEMALE,ANGLE,AU	
...3 JA403	3701-001264	CONNECTOR-DSUB;9P,2R,MALE,ANGLE,AUF	
...3 CN03	3702-001137	CONNECTOR-RIBBON;20P,FEMALE,STRAIGHT,AU1	
...3 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
...3 CN02	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
...3	BP61-00195A	BRACKET-EMI,MDR;SP50L2,PBS,T0.2	S.N.A
...3	BP61-00196A	BRACKET-EMI,DIG;SP50L2,PBS,T0.2	S.N.A
...3	BP97-00483A	ASSY SMD-MICOM;EUROPE,TM_ALDP06	S.N.A
....4 D415	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D414	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D413	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D412	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D416	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D417	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D418	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D451	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D452	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D411	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D401	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D402	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D403	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D404	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D405	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D410	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D409	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D408	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D407	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D419	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D426	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D425	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
....4 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
....4 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
....4 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 Q905	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 Q903	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 Q802	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 Q801	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 Q906	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 Q904	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
....4 Q910	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
....4 Q909	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
....4 Q902	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
....4 Q901	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
....4 LD01	0601-001313	LED;CHIP,GRN,2x1.8mm,565nm	
....4 IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
....4 IC104	0801-002559	IC-CMOS LOGIC;74LVX74,D FLIP-FLOP,TSSOP,	
....4 IC606	0802-001025	IC-BICMOS LOGIC;74LCX374,D FILP-FLOP,TSS	
....4 IC804	1001-001067	IC-ANALOG SWITCH;QS34X245-Q3,CMOS,TQSOP,	
....4 IC803	1001-001067	IC-ANALOG SWITCH;QS34X245-Q3,CMOS,TQSOP,	
....4 IC108	1002-001179	IC-A/D CONVERTER;AD9884,8BIT,QFP,128P,-,	
....4 IC108	1002-001343	IC-A/D CONVERTER;AD9888KS-100,-,MQFP,128	
⚠ 4 IC402	1003-001391	IC-DISPLAY DRIVER;FLI2200,QFP,176P,945MI	
....4 IC604	1003-001503	IC-DISPLAY DRIVER;SNI,QFP,208P,28X28MM,-	
....4 IC110	1006-001076	IC-DRIVER/RECEIVER;232,SOP,16P,300MIL,DU	
....4 IC112	1103-000129	IC-EEPROM;24C02,256x8BIT,SOP,8P,150MIL,1	
....4 IC112	1103-000129	IC-EEPROM;24C02,256x8BIT,SOP,8P,150MIL,1	
....4 IC112	1103-001147	IC-EEPROM;24256,256KBIT,SOP,8P,150MIL,-,	
....4 IC113	1105-001305	IC-DRAM;4S641632,1Mx16x4Bit,TSOP,54P,400	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC115	1107-001087	IC-FLASH MEMORY;29LV160,1Mx16BIT,SOP,48P	
⚠ 4 IC407	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P,1	
....4 IC904	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
⚠ 4 IC405	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
....4 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
....4 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
....4 T0087	1203-002074	IC-POSI.FIXED REG.;MIC39150,TO-263,3P-,	
....4 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
....4 T0123	1203-002351	IC-VOLTAGE REGULATOR;LF25C,DPAK,3P,240MI	
....4 IC118	1204-001926	IC-VIDEO PROCESS;VPC3230D-C5,PQFP,80P,-,	
....4 IC118	1204-001926	IC-VIDEO PROCESS;VPC3230D-C5,PQFP,80P,-,	
....4 IC118	1204-001990	IC-VIDEO PROCESS;ASI500,BGA,316P,27X27MM	
....4 IC901	1204-002105	IC-DECODER;SDA6001-B12,MQFP,128P,28x28mm	
....4 IC120	1205-001778	IC-TRANSMITTER;SII160CT100,TQFP,100P,551	
....4 IC501	1205-002198	IC-RECEIVER;SII169CT100,LQFP,100P,14X14M	
....4 R521	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R522	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R540	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R541	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R544	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R546	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R549	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R552	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R553	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R493	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R504	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R506	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R508	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R509	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R514	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R517	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R518	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R520	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R589	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R590	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R592	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R702	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R803	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R804	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R901	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R902	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R950	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R557	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R558	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R560	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R562	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R572	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R573	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R576	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R583	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R586	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1108	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1109	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1110	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1114	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1115	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1116	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1117	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1118	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R431	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1048	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1049	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1050	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1051	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1056	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1078	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1079	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1080	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1091	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R471	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R476	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R479	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R480	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R481	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R482	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R484	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R485	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R491	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R432	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R439	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R443	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R450	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R465	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R470	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R469	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R468	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R467	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1037	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R601	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R599	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R591	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R612	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R613	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R980	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R550	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R1107	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R434	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R436	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R543	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R528	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R442	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R1090	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R559	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R561	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R939	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R940	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R976	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R977	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1083	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1084	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1085	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1086	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1089	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1088	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1087	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R515	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R513	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R512	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R511	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R510	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R503	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R516	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R538	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R537	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R535	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R533	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R532	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R523	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R494	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R489	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R488	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R487	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R486	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R475	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R495	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R502	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R500	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R499	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R498	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R497	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R496	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R945	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R944	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R943	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R938	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R937	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R935	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R970	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R995	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R993	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R992	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R991	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R990	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R973	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R593	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R585	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R584	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R579	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R578	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R574	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R594	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R934	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R933	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R932	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R931	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R600	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R596	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R474	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1022	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1021	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1020	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1019	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1018	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1017	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1024	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1030	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1029	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1028	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1027	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1026	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1025	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1008	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1007	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1006	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1005	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1003	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1002	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1009	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1016	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1015	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1014	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1012	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1011	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1010	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R457	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R456	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R455	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R454	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R453	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R449	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R458	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R473	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R463	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R462	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R461	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R460	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R459	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R402	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1052	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1035	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1034	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1032	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1031	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R407	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R448	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R447	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R445	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R418	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R416	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R409	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R981	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R982	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R812	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R525	2007-000075	R-CHIP;220OHM,5%,1/10W,TP,1608	
....4 R927	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R925	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R580	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R547	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R437	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R906	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R598	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R597	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R577	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R911	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R920	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R923	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R926	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R972	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R555	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R1036	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R1113	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R408	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R410	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R492	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R501	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R524	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R534	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R539	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R401	2007-000080	R-CHIP;2KOHM,5%,1/10W,TP,1608	
....4 R505	2007-000082	R-CHIP;3.3KOHM,5%,1/10W,TP,1608	
....4 R963	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R964	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R965	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R966	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R962	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R961	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R960	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R959	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R958	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R999	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R996	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R989	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R987	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R985	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R983	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R971	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R968	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R967	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R929	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R701	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R536	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R531	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R414	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R412	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R1060	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R1057	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R957	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R956	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R955	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R954	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R953	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R930	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R947	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R951	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R952	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R1001	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R811	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R813	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R908	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R910	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R588	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R587	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R582	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R581	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R969	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R948	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R946	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R941	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R464	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R451	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R446	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R441	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R417	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R415	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R411	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R1103	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R575	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R548	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R526	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R490	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R466	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R477	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R478	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R483	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R921	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R554	2007-000109	R-CHIP;1MOHM,5%,1/10W,TP,1608	
....4 R433	2007-000118	R-CHIP;390OHM,5%,1/10W,TP,1608	
....4 R545	2007-000123	R-CHIP;1.5KOHM,5%,1/10W,TP,1608	
....4 R919	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R936	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R975	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R978	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R918	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R1059	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R1062	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R907	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R909	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R979	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R440	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R1063	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R426	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R427	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R428	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R551	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R903	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R904	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R425	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R1058	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R1061	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R421	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R422	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R423	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R424	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R519	2007-000402	R-CHIP;150OHM,5%,1/10W,TP,1608	
....4 R472	2007-000539	R-CHIP;200ohm,5%,1/16W,DA,TP,1608	
....4 R1111	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
....4 R542	2007-000882	R-CHIP;4.7OHM,5%,1/10W,TP,1608	
....4 R444	2007-001044	R-CHIP;56OHM,5%,1/10W,TP,1608	
....4 R438	2007-001044	R-CHIP;56OHM,5%,1/10W,TP,1608	
....4 R605	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R604	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R603	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R429	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R607	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R608	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R609	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R949	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R420	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R1075	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R1076	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R1077	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R403	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R419	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R406	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R405	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R404	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 RW810	2011-000002	R-NETWORK;22OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW807	2011-000002	R-NETWORK;22OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW604	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW605	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW606	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW701	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW702	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW506	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW507	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW601	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW602	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW603	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW703	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW802	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW803	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW804	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW805	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW806	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW704	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW705	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW706	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW707	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW801	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW505	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW106	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW107	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW108	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW109	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW401	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW101	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW102	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW103	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW104	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW105	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW402	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW408	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW501	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW502	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW503	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW504	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW403	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW404	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW405	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW406	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW407	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW711	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW712	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW713	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW710	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW709	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW708	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP	
....4 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,20%	
....4 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,20%	
....4 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,20%	
....4 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,20%	
....4 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,20%	
....4 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,20%	
....4 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,20%	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000405	C-CERAMIC,CHIP;0.18NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000405	C-CERAMIC,CHIP;0.18NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-000727	C-CERAMIC,CHIP;3.9nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000838	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000844	C-CERAMIC,CHIP;39nF,10%,50V,X7R,TP,2012,	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
....4 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
....4 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
....4 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001607	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,1608	
....4 C120	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
....4 C120	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
....4 C120	2203-001680	C-CERAMIC,CHIP;68nF,20%,50V,Z5U,TP,2012	
....4 C120	2203-001680	C-CERAMIC,CHIP;68nF,20%,50V,Z5U,TP,2012	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-006170	C-CERAMIC,CHIP;220NF,10%,16V,X7R,TP,1608	
....4 C825	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C486	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C464	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C1044	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C565	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C577	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C595	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C929	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C930	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C416	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C417	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C419	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C420	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C564	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C944	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C934	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C723	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C654	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C807	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C801	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C436	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
....4 C431	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
....4 C429	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
....4 C427	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
....4 C404	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
....4 C922	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C805	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C774	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C765	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C750	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C727	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C995	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C989	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C982	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C972	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C961	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C952	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C474	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C467	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C422	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C1041	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C1021	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C1006	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C611	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C566	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C550	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C476	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C524	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C529	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C978	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C974	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C720	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C615	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C525	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C574	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C614	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 X601	2801-003667	CRYSTAL-SMD;14.3182MHZ,50PPM,28-AAN,16.5	
....4 X902	2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	
....4 X402	2801-004004	CRYSTAL-SMD;20.25MHz,20ppm,28-AAN,13pF,2	
....4 X401	2801-004004	CRYSTAL-SMD;20.25MHz,20ppm,28-AAN,13pF,2	
....4 X901	2801-004117	CRYSTAL-SMD;6MHZ,30PPM,28-ABX,20PF,150OH	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 T0119	MD09-00137A	IC MICOM;P-PCFM-012,P-PCFM-012,32,5V,12M	
....4 0	AA41-00675B	PCB;SP43L2HX/50L2HX,6,L63A,1	S.N.A
....4 R413	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
....4 R916	2007-000098	R-CHIP;56KOHM,5%,1/10W,TP,1608	
....4 R917	2007-000098	R-CHIP;56KOHM,5%,1/10W,TP,1608	
....4 R928	2007-000098	R-CHIP;56KOHM,5%,1/10W,TP,1608	
....4 R942	2007-000098	R-CHIP;56KOHM,5%,1/10W,TP,1608	
...3	BP63-00101A	SHIELD CASE-BOT ASSY;50L2,SPTE,T0.5	S.N.A
....4	BN63-00403A	SHIELD-CASE,BOT;50L2,LCD,SPTE,T0.5	S.N.A
....4	BP73-00019A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
....4	BP73-00021A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
....4	BP62-00026A	HEAT SINK-D TOP;SP50L2,AL,1.0,,,,	S.N.A
....4	BP73-00020A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
...3	BP63-00100A	SHIELD CASE-TOP ASSY;50L2,SPTE,T0.5	S.N.A
....4	BN63-00401A	SHIELD-CASE,TOP;50L2,LCD,SPTE,T0.5	S.N.A
....4	BN63-00402A	SHIELD-CASE,MID;50L2,LCD,SPTE,T0.3	S.N.A
....4	BP73-00019A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
....4	BP73-00020A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
....4	BP73-00021A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A
....4	BP73-00022A	SILICON/RUBBER-BERGQUIST;SP-50L2,SILICON	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4	BP62-00026A	HEAT SINK-D TOP;SP50L2,AL,1.0,,,,	S.N.A
..2 T0073	BP94-00445K	ASSY PCB MAIN;0	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 CN02	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3 CN01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3 CN601	3703-001187	CONNECTOR-BACK PANEL;64P,2R,FEMALE,STRAI	
...3 CN906	3711-000577	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAIG	
...3 CN906	3711-000616	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	S.N.A
...3 CN906	3711-000840	CONNECTOR-HEADER;BOX,30P,2R,2MM,STRAIGHT	
...3 CN906	3711-000840	CONNECTOR-HEADER;BOX,30P,2R,2MM,STRAIGHT	
...3 CN906	3711-001038	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
...3 CN906	3711-001154	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	S.N.A
...3 CN906	3711-003045	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,STRAIGH	
...3 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
...3 CN906	3711-004484	CONNECTOR-HEADER;BOX,5P,1R,2mm,STRAIGHT,	S.N.A
...3 JA704	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
...3 JA706	3722-001796	JACK-PIN;7P(10P),-,NI,RD/RD/WH/WH/RD/BL/	
...3 GT104	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 GT102	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 GT101	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3	AA96-00475E	ASSY H/S;KA278RA05,KA78R05,78R09,KA7808,	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0087	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
....4 T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
....4 T0087	1203-001225	IC-POSI.FIXED REG.;78R09,TO-220,4P,-,PLA	
....4 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4 CIS	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
...3	BN63-00317A	SHIELD-CASE,A-TOP;50L2,SPTE,T0.5	S.N.A
...3	BN63-00318A	SHIELD-CASE,A-BOT;50L2,SPTE,T0.5	S.N.A
...3	BP97-00441A	ASSY SMD;0	S.N.A
....4 D109	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D110	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D111	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D112	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D113	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D108	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D103	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D104	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D105	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D106	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D107	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,S0T-23,	
....4 D117	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D118	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D119	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D120	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D121	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D101	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D102	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D114	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D115	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D116	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 Q122	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SC-23	

Loc. No.	Code No.	Description ; Specification	Remark
....4 Q132	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q131	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q126	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q125	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q124	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q123	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q121	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q139	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q138	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q137	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q136	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q135	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q134	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q133	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q120	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q112	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q111	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q110	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q109	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q108	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q106	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q105	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q119	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q118	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q117	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q116	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q115	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q114	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q113	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q101	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 IC104	0801-002279	IC-CMOS LOGIC;74VHC4053,MUX,SOP,16P,150M	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC704	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
....4 IC106	1001-001204	IC-VIDEO SWITCH;TEA6415CD,8INPUT-6OUTPUT	
....4 IC103	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
....4 IC131	1204-001814	IC-SELECTOR;CXA2151Q,QFP,48P,144MIL,PLAS	
....4 R353	2007-000052	R-CHIP;10KOHM,1%,1/10W,TP,1608	
....4 R229	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R230	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R361	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R362	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R136	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R115	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R132	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R133	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R134	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R291	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R290	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R265	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R263	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R201	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R296	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R295	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R294	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R293	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R292	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R192	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R183	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R182	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R181	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R180	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R179	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R191	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R187	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R186	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R185	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R184	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R297	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R354	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R345	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R344	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R343	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R342	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R370	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R369	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R368	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R367	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R355	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R341	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R333	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R318	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R317	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R316	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R298	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R338	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R337	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R336	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R335	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R334	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R178	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R129	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R128	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R127	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R126	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R125	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R149	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R148	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R147	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R131	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R130	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R124	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R117	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R116	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R109	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R106	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R105	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R123	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R122	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R121	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R120	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R119	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R151	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R172	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R171	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R170	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R169	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R168	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R177	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R176	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R175	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R174	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R173	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R167	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R158	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R157	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R154	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R153	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R152	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R166	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R165	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R164	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R162	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R161	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R305	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R304	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R303	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R302	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R306	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R307	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R313	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R314	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R315	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R188	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R194	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R238	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R239	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R240	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R301	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R300	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R299	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R271	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R266	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R267	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R268	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R269	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R245	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R244	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R243	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R242	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R394	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R393	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R392	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R391	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R385	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R383	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R381	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R270	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R213	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R212	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R209	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R206	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R204	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R203	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R202	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R118	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R241	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R226	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R224	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R223	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R214	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R220	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R221	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R222	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R356	2007-000080	R-CHIP;2KOHM,5%,1/10W,TP,1608	
....4 R103	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R348	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
....4 R346	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
....4 R284	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R283	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R282	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R281	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R280	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R289	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R288	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R287	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R286	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R285	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R279	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R273	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R272	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R114	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R111	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R108	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R278	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R277	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R276	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R275	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R274	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R112	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R104	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R102	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R101	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R349	2007-000450	R-CHIP;180OHM,5%,1/10W,TP,1608	
....4 R347	2007-000450	R-CHIP;180OHM,5%,1/10W,TP,1608	
....4 R193	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
....4 R189	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
....4 R260	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R261	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R262	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R264	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R319	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R259	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R236	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R255	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R256	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R257	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R258	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R380	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R382	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R384	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R386	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R387	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R379	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R320	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R323	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R326	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R339	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R340	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R235	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R146	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R155	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R156	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R160	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R207	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R145	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R140	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R141	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R142	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R143	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R144	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R228	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R231	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R232	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R233	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R234	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R227	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R210	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R211	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R215	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R217	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R225	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R205	2007-001247	R-CHIP;910HM,5%,1/10W,DA,TP,2012	
....4 R139	2007-001247	R-CHIP;910HM,5%,1/10W,DA,TP,2012	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 L121	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L120	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L119	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L118	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L127	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L126	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L125	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L124	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L123	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L111	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L105	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L104	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L103	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L102	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L101	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L110	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L109	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L108	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L107	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L106	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 X101	2801-001473	CRYSTAL-SMD;4MHz,50ppm,28-AAN,18pF,150oh	
....4 X102	2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 0	AA41-00672B	PCB MAIN;SP43L2HX/50L2HX,4,L63A,1	S.N.A
....4 T0119	MD09-00137A	IC MICOM;P-PCFM-012,P-PCFM-012,32,5V,12M	
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
...3	MD39-00077A	CBF IF;PPR-2200,1P,UL1365#26,100MM,UL/CS	
...3	BP63-00120A	GASKET;SP50L2HX,CONDUCTIVE-FABRIC,4.0mm,	S.N.A
...3 TU01	AA40-00094A	TUNER;TCLW3101PD16A(S),PAL/SECAM,181CH,3	
...3 TU02	AA40-00095A	TUNER;TCPW3001PC16A(S),PAL/SECAM,181CH,3	

ASSY P/MATERIAL

1	BP92-00140A	ASSY P/MATERIAL;HLM507WX/XAA,L62A	S.N.A
..2 CIS	AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2 CIS	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2 CIS	AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2 CIS	AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	S.N.A
..2 CIS	AA69-00744K	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1600,H1	S.N.A
..2 T0102	AA73-00005B	RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT	S.N.A
..2	AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A

ASSY ACCESSORY

1 M0016	BP92-00511Q	ASSY ACCESSORY;SP43L2HX/BWT,L63A	S.N.A
..2 CIS	4301-000103	BATTERY-ALKALINE;1.5V,750mAH,AAA,10.5x44	

Loc. No.	Code No.	Description ; Specification	Remark
..2	6801-001073	CARD-REGISTRATION;RUS,XEV,RUS,MOJO100,-,	S.N.A
..2 T0116	AA39-40001B	CABLE RCA;,1500MM	
..2	AA68-00816B	CARD WARRANTY-01;,RUSSINA,2,W/P 120G,BOT	S.N.A
..2	AA68-01120A	MANUAL SERVICE;-,-,CIS,A4,6PAGE(FOLD),W/	S.N.A
..2	AA68-01402A	MANUAL-GOOD WILL LETTER;,CIS,B5,1PAGE,A/	S.N.A
..2	AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2 CIS	BP68-00124A	MANUAL USERS;SP43L2/50L2HX,RUS,W/P100G,L	S.N.A
..2 CIS	BP68-00061A	MANUAL USERS;SP50L2HX,ENG,W/P100G,L63A,B	
..2 T0074	BP59-00025A	REMOCON;SP50L2HX,TM63,L63,48,G66718,ALAD	S.N.A

ASSY MISC-ENGINE SVC

1	BP91-00810A	ASSY MISC-ENGINE SVC;LCD,SVC ASSY	S.N.A
..2 T0128	BP96-00271A	ASSY COVER P-LAMP TSB100;LCD SVC,LAMP AS	
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00136A	BRACKET-LAMP,CONNECT;436W,SECC,T1.0,-,-,	S.N.A
...3 T0050	BN47-00001A	LAMP-HID(PARA),TSB;PARABOLA,1.3MM,65*70,	
...3	BN61-00177A	HOUSING-LAMP,HOLD;50L2HX,PPS V0,BLK	S.N.A
...3	BN61-00178A	HOLDER-LAMP;50L2HX,PPS V0,BLK	S.N.A
...3	BN61-00180A	BRACKET-LAMP,COVER;50L2HX,AL 1050S,T1.0	S.N.A
...3	BN64-00131A	HANDLE-LAMP;50L2,SUS	S.N.A
...3	BP96-00188A	ASSY MISC P-BRKT RAY;SP50L2HX/XEC,50L2	
....4	BP61-00164A	BRACKET-RAY;50L2,SPC,T0.5	S.N.A
....4	BP61-00182A	BRACKET-RAY2;50L2,SPC,TO.5,BLK	S.N.A
..2 T0125	BP96-00272A	ASSY COVER P-FAN;LCD SVC,FAN ASSY	
...3	AA63-00140A	SPACER-FAN;436W,CR SPONGE,-,-,-,BLK,-,-	S.N.A
...3 T0136	BP31-00001B	FAN;G9225L12B2-FS(WS),SP50L2HX,,,395mm W	

ASSY FIXING

1	BP91-00839A	ASSY FIXING;3PANEL,L63A,50	S.N.A
..2 T0081	6003-000269	SCREW-TAPTITE;BH,+,S,M3,L6,ZPC(YEL),SWRC	S.N.A
..2 T0076	AA39-20010H	LEAD CONNECTOR-ASSY;,1P,300,YFH800-01,S,	
⚠ ..2 T0066	AA96-20130K	ASSY POWER CORD;,CP2/NO(4.0R),H/S 700MM,	

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

3-3 SP61L2HX/XEC

ASSY COVER FRONT

Loc. No.	Code No.	Description ; Specification	Remark
1 M0001	BP90-00107H	ASSY COVER FRONT;SP61L2HX/XEC,L63A	S.N.A
..2 T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2 T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2 T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2 T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2 PM+CF	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2 PCB+CM	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2 LED+CM	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2 HB+CF	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2 T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
..2 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 T0081	AA60-10050U	SCREW-TAPPING;-,ZPC(BLK),4,M4,RWH,+,-,-,	S.N.A
..2	AA61-00678B	HOLDER-BOSS;43/50L2,HIPS,NTR,HB	S.N.A
..2	AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
..2	AA65-30013A	CLAMPER CORE-WIRE;-,NYLON-66,V0,-,NTR,DA	S.N.A
..2	BN63-00315A	SHIELD-CASE,D-TOP;50L2,SPTE,T0.5	S.N.A
..2	BP61-00200A	BRACKET-FRONT;61L2,SECC-1,T1.6,,,BLK,	S.N.A
..2	BP61-00201A	BRACKET-FRONT BOT R;61L2,SECC-1,T1.6,,,B	S.N.A
..2	BP61-00202A	BRACKET-FRONT BOT L;61L2,SECC-1,T1.6,,,B	S.N.A
..2 T0053	BP64-00098A	SCREEN FRESNEL;617W,PMMA,1381*790,T1.5	
..2 T0054	BP64-00099A	SCREEN LENTI;61W,PMMA,1381*790,T2.1	
..2 T0158	BP96-00080N	ASSY COVER P-MAIN;61L2,HIPS,V0,SV012P,3P	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3 T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3 T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3 T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
...3 T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
...3	AA61-00165B	BRACKET-GRILLE;43J6,SECC-1,T1.0,-,-,BLK,	S.N.A
...3	AA61-00852B	BRACKET-SUPPORT,R;50J6,SECC-1,T1.6,NTR	S.N.A
...3	AA61-00853B	BRACKET-SUPPORT,L;50J6,SECC-1,T1.6,NTR	S.N.A
...3	AA63-60117A	SPACER-FOOT;SVP403J,NEOPRENE,-,-,-,BLK,-	S.N.A
...3 T0069	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
...3	AA64-00548D	CABINET-MAIN;43J6,HIPS,V0,GRY	S.N.A
...3	BP61-00104A	BRACKET-FRONT,R;617W,SECC-1,T1.6,CLR	S.N.A
...3 T0072	BP61-00127A	BRACKET-FRONT,L;617W,SECC-1,T1.6,CLR	
...3 CS5	BP96-00189A	ASSY SPEAKER P;8 OHM,001144,001282,00121	S.N.A
....4 T0082	3001-001144	SPEAKER;25W,7OHM,88DB,1.6KHZ	
....4 T0082	3001-001216	SPEAKER;15W,8OHM,90+-2 DB/W/0.5 M,150HZ	
....4 T0082	3001-001282	SPEAKER;25W,8OHM,90DB,55HZ	
....4 T0076	AA39-00086A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC	
....4	BP39-00021A	LEAD CONNECTOR;L63A/SP50L2H,UL1007#22,UL	
.....5 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
.....5 T0121	3301-001502	CORE-FERRITE;AE,16.5" ø7" ø30MM,-,-	
...3 T0069	AA60-00091G	SPACER-FELT;-,FELT,200X10,-,-,BLK,T0.5,-	S.N.A
...3	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3	AA65-30102A	CLAMPER CORE-WIRE;-,NYLON,66,-,GRAY,-	S.N.A
...3 T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	
..2	BP96-00152A	ASSY COVER P-SHIELD CASE,BOT;507W,SPTE,T	S.N.A
...3	BN63-00026A	GASKET-EMI;CN17MSS,-,12MM,26MM,138MM,-,-	S.N.A
...3	BN63-00027A	GASKET-EMI;PC24PSA,-,17MM,26MM,300MM,-,-	S.N.A
...3	BN63-00316A	SHIELD-CASE,D-BOT;50L2,SPTE,T0.5	S.N.A
..2	BP96-00153A	ASSY COVER P-SHIELD,JACK;507W,PBS,T0.2,C	S.N.A
...3	BP61-00130A	BRACKET-EMI,SPRING;,617W,T0.2,PBS	S.N.A
...3	BP63-00025A	SHIELD-EMI,JACK;507W,T4.0,CONDUCTIVE FAB	S.N.A
..2	BP96-00157L	ASSY COVER P-GRILL;61L2,HIPS,HB,GRY,SV01	S.N.A
...3 T0069	AA60-00091S	SPACER-FELT;61L2,FELT,30*10,BLK,T0.5	S.N.A
...3	AA61-00206A	MAGNET-GRILLE;43J6,PI15X3T,-,-,-,-	S.N.A
...3	AA61-00651B	HOLDER-MAGNET,BOT;50L2,ABS,G3676,HB	S.N.A
...3	BN63-00374C	COVER-GRILL;61L2,HIPS,HB,G4309,SV012P,GU	S.N.A
...3	BP63-00013A	COVER-DECO,LED;507W,ABS HB,BLK	S.N.A
...3 T0059	BP64-00071A	INDICATOR LED;507W,ACRYL	S.N.A
...3	BP64-00112D	WINDOW-LED;613P,ACRLY,T2.0,TAPE WF-724,H	S.N.A
...3 T0069	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
..2 T0003	BP96-00158J	ASSY COVER P-FRONT;61L2,HIPS,HB,GRY,DGM1	S.N.A
...3	BN63-00372J	COVER-FRONT;61L2,HIPS,HB,GRY,DGM1262+SV0	S.N.A
...3 T0069	BP60-00015C	SPACER-FELT;617W,FELT,L1380,T0.5,W10	S.N.A
...3 T0069	BP60-00015D	SPACER-FELT;617W,FELT,L760,T0.5,W10	S.N.A
...3 T0102	BP73-00007A	RUBBER-CAP;61L2,SILICONE,WHITE,RUBBER	S.N.A
...3 T0057	BP64-00199A	BADGE-BRAND;PJLCD,AL,T1.5,72,12.5,,DGN-S	S.N.A
..2	BP61-00092A	BRACKET-SCREEN,SIDE;617W,AL6063 EXTR,BLK	S.N.A
..2	BP61-00096A	BRACKET-SCREEN,TOP;617W,AL6063 EXTR,BLK	S.N.A
..2	BP61-00097A	BRACKET-SCREEN,BOT;617W,SECC-1,T1.6,BL	S.N.A

ASSY COVER REAR

Loc. No.	Code No.	Description ; Specification	Remark
1 M0002	BP90-00108D	ASSY COVER REAR;SP61L2HX/XEC,L63A	S.N.A
..2	AA61-00524B	BRACKET-SUPPORT;43J6,SECC-1,T1.6,-,-,CLR	S.N.A
..2 T0112	BN63-00373C	COVER-BACK;61W DLP,HIPS,V0,GRAY,DG-703P	
..2 T0069	BP60-00015B	SPACER-FELT;617W,FELT,L680,T0.5,W30	S.N.A
..2	BP61-00095A	BRACKET-MIRROR,TOP(T);617W,AL6063 EXTR,B	S.N.A
..2	BP61-00100A	BRACKET-SUPPORT,BACK(TOP);617W,SECC-1,T1	S.N.A
..2	BP61-00101A	BRACKET-SUPPORT,BACK(BOT);617W,SECC-1,T1	S.N.A
..2 T0191	BP61-00105A	HOLDER-BACK,R;,HIPS V0,GRAY,DG-703P	
..2 T0190	BP61-00106A	HOLDER-BACK,L;,HIPS V0,GRAY,DG-703P	
..2 T0068	BP61-00151A	BRACKET-MIRROR,ASSY;617W,BLK	
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	BP61-00093A	BRACKET-MIRROR,BOT;617W,AL6063 EXTR,BLK	S.N.A
...3	BP61-00094A	BRACKET-MIRROR,TOP;617W,AL6063 EXTR,BLK	S.N.A
...3	BP61-00102A	BRACKET-MIRROR,SIDE(R);617W,SECC-1,T1.6,	S.N.A
...3	BP61-00103A	BRACKET-MIRROR,SIDE(L);617W,SECC-1,T1.6,	S.N.A
..2	BP64-00075C	INLAY-A/V;50L2,GUJU,PS SHEET,T0.3,DG703P	S.N.A
..2 T0134	BP67-00043A	MIRROR-FRONT,DM1.61,GLASS,1197*678*629,	
..2 T0130	BP96-00178A	ASSY COVER P-TERMINAL BOARD;50L2,LCD,HIP	S.N.A
...3	BN61-00242A	HOLDER-TERMINAL;HIPS VO,HLM4365W,G4309,3	S.N.A
...3	BN64-00115A	INLAY-TERMINAL,PAL;HLM4365,PS SHEET ,T0.	S.N.A
..2	BP96-00184A	ASSY COVER P-BACK,BOT;SP50L2,HIPS V0 G43	S.N.A
...3	AA61-10379B	BRACKET-COVER;SP43J6,SECC-1,T1.0,-,-,-,-	S.N.A
...3 T0112	AA64-00547C	CABINET-BACK,BOT;43L2,HIPS,VO,G4309	
...3	AA64-00578B	INLAY-LAMP;43J6,PS SHEET,T0.3,-,-,BLK,-	S.N.A
..3	BN63-00332A	COVER-LAMP;50L2HX,HIPS,V0,G4309	S.N.A
...3	BN63-00363A	COVER-DUCT,LAMP;50L2HX,PC ABS,V0,BLK	S.N.A
...3 T0069	AA63-00099B	SPACER-FELT;43J6,FELT,-,-,-,BLK,T1.0,-,8	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..3	AA61-00553C	BRACKET-METAL GRILL;SECC-1,43L2,T1.0,BLK	S.N.A
.2 T0069	BP60-00015A	SPACER-FELT;617W,FELT,L600,T0.5,W30	S.N.A
..2	AA63-00021T	SPACER-MIRROR,TOP;47Q7,PVC HB,L1080,BLK	S.N.A
.2	AA63-00021P	SPACER-MIRROR;52Q7,PVC HB,BLK	S.N.A

ASSY CHASSIS

Loc. No.	Code No.	Description ; Specification	Remark
1 M0017	BP91-00798L	ASSY CHASSIS;SP61L2HX/XEC,L63A	S.N.A
..2 T0137	AA94-11921A	ASSY PCB MISC-LINE FILTER;L62A	S.N.A
...3 CX813S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
...3 CX812S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
...3 CX811S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
...3 LX813S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.10HM,1.5K	
...3 LX812S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.10HM,1.5K	
...3 LX811S	AA29-00017A	FILTER LINE NOISE;,25-4MH 7A,0.10HM,1.5K	
...3	AA97-12826A	ASSY AUTO;L62A	S.N.A
....4 VX811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4 RX811S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
....4 FP811B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 FP811A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 GT808	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT809	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT807	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT806	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT805	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT804	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 EY801	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY802	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY803	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY804	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY805	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY806	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY807	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY808	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY809	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY810	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY811	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY812	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY813	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY814	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY815	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY816	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY817	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY818	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY819	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY820	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY821	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY822	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 PCB	AA41-00697A	PCB-LINE FILTER;SVP-50L2H,CEM-1,1L,A,1.6	S.N.A
...3 FP811S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
...3 NT811S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2 CIS3	BP94-00008A	ASSY PCB MISC-BACK TERMINAL;ALADDIN,3P L	
...3 CN906	3711-004059	CONNECTOR-HEADER;BOX,30P,2R,2mm,ANGLE,SN	S.N.A
...3 JT701	3722-000498	JACK-SCART;21P,-,SN,BLK,NO	
...3 JT603	3722-001921	JACK-PIN;3P(6P),-,NI,WHT/RED/BLK,-	
...3 JT702	AA63-40276A	TERMINAL-SPK,JACK;4P,ABS VO,4,BLK	S.N.A
...3	BP97-00295A	ASSY AUTO;0	S.N.A
....4	BP97-00192A	ASSY SMD;0	S.N.A
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5RT02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.....5RT01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.....5RT04	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5LT06	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT07	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT23	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT24	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT25	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT01	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT02	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT03	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT04	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5LT05	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
.....5PCB	AA41-00676A	PCB-TERMINAL;3P LCD,FR-4,2L,A,1.6T,196X9	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 GT701	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 LT22	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3 LT21	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CT701A	BP39-00087A	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#26,U	
..2 T0133	BP94-00085A	ASSY PCB POWER;SP50L2HX,L63A	
...3 T0083	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
...3 T0083	0402-001191	DIODE-RECTIFIER;MUR460,600V,4A,CASE267-0	
...3 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 PC802S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
...3 T0086	1203-001733	IC-PWM CONTROLLER;254,DIP,8P,300MIL,PLAS	
...3 T0086	1203-002268	IC-PWM CONTROLLER;ML4824,PDIP,16P,250MIL	
...3 C598	2201-000173	C-CERAMIC,DISC;10NF,10%,500V,Y5P,BK,16X4	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3 C857	2301-001456	C-FILM,MPE-PPF;5.1nF,5%,1.6kV,TP,29x9x16	
...3 CX801S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
...3 C701	2401-003031	C-AL;470uF,20%,450V,GP,BK,35x45mm,1	
...3 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 RL801S	3501-001053	RELAY-POWER;5VDC,530MW,10000MA,1FORMA,15	
...3 FD801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
...3 TS801S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~80V	
...3 HS803	AA96-00353C	ASSY H/S;,POWER,AA62-00066A,KA78R12,KA27	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
....4 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F4	
....4 CIS	AA62-00066A	HEAT SINK-PS;-,AL,T1.0,SILVER,-,-,NATURA	S.N.A
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SW	
...3 D801S	AA96-50310A	ASSY H/S;-,POWER,AA62-30150C,RBV606,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
....4	AA62-30150C	HEAT SINK-ES;-,A6063 EXTR,-,WHT,40(24.5)	S.N.A
...3 L802	BH27-00027A	COIL-CHOKE-1;CH-1215E,8.5uH,-,DR1215(C:7	
...3 L804	BH27-00027A	COIL-CHOKE-1;CH-1215E,8.5uH,-,DR1215(C:7	
...3 T801S	BP26-00007A	TRANS SWITCHING;EER3543,L62A,HLL507W,80~	
...3 PFT801	BP26-00008A	TRANS-PFC;ER-4042,L62A,14P,800UH,2.40UH,	
...3 L801	BP26-00009A	TRANS-MULTI CHOKE;EER2834,L62A,12P,28UH	
...3 CN801	BP39-00019A	LEAD CONNECTOR;L62A/HLM507WX,UL1007#26,U	
...3 HS801S	BP96-00085A	ASSY HEAT SINK P;H/S,SCREW,FQAF10N80,FP	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0083	0402-001358	DIODE-RECTIFIER;FFPF10U60S,600V,10A,TO-2	
....4 CIS	0505-001683	FET-SILICON;FQAF16N50,N,500V,11.3A,0.32O	
....4 CIS	0505-001684	FET-SILICON;FQAF10N80,N,800V,6.7A,1.05OH	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4 CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
....4 CIS	BP62-00012A	HEAT SINK-ES;L62A,A6063S,T2.4,30,88	S.N.A
...3	BP97-00286A	ASSY AUTO;0	S.N.A
....4 DSP802	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
....4 DSP803	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
....4 DSP804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
....4 DSP805	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
....4 DSP807	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
....4 D815	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
....4 D822	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
....4 D824	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	
....4 D825	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35	

Loc. No.	Code No.	Description ; Specification	Remark
....4 DSP801	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 D821	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000532	DIODE-RECTIFIER;ERC13-08,800V,1.2A,DO-20	
....4 T0083	0402-000532	DIODE-RECTIFIER;ERC13-08,800V,1.2A,DO-20	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
....4 DZ016	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DS802	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DSZ805	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DSZ804	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 QSP802	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QSP804	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
....4 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 QSP803	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QSP801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4 R828	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R812	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R847	2001-000019	R-CARBON(S);100HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R841	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R808	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R846	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R849	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R840	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R848	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP803	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP801	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R860	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R837	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R822	2001-000347	R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R836	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP807	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS804	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R819	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP806	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R843	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R844	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R809	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP809	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP808	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP805	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R859	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP802	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RSP804	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS805	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS803	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS802	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R839	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R804	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R825	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R842	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R807	2001-001070	R-CARBON(S);1200HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R858	2001-001070	R-CARBON(S);1200HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R818	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R806	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R823	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R824	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R829	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
⚠ 4 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
....4 R864	2003-000537	R-METAL OXIDE(S);1Kohm,5%,1W,AF,TP,3.3x9	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R865	2003-000537	R-METAL OXIDE(S);1Kohm,5%,1W,AF,TP,3.3x9	
....4 R815	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
....4 R803	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R805	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R857	2003-000755	R-METAL OXIDE(S);6.8Kohm,5%,2W,AF,TP,4x1	
....4 R856	2003-000755	R-METAL OXIDE(S);6.8Kohm,5%,2W,AF,TP,4x1	
....4 R852	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R853	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R854	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R855	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R813	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R816	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R817	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R851	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 R814	2003-001093	R-METAL OXIDE(S);12Kohm,5%,2W,AF,TP,3.9x	
....4 RS801	2003-002194	R-METAL OXIDE(S);1.8Kohm,5%,1W,AF,TP,2.5	
....4 R835	2003-002216	R-METAL OXIDE(S);1.2Kohm,5%,2W,AF,TP,3.9	
....4 R863	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R862	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R861	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R834	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
....4 R821	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R811	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R810	2004-001396	R-METAL(S);390Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R626	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R801	2004-002017	R-METAL(S),190Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R802	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R833	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 RSF801	2008-001050	R-FUSIBLE;22ohm,5%,2W,AF,TP,3.9x10mm	
....4 R845	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 R832	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 R827	2009-000021	R-METAL PLATE;0.33ohm,10%,5W,CL,TP,5x14x	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 C598	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 C803	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
....4 C855	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
....4 C823	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C835	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C822	2301-001211	C-FILM,PPF;22nF,5%,400V,TP,20x7x14,7.5mm	
....4 C826	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
....4 C809	2305-000411	C-FILM,MPEF;470nF,5%,50V,TP,7.3x4.8x5.5m	
....4 C851	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C845	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C844	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C841	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C832	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C816	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C811	2305-001023	C-FILM,MPEF;680nF,10%,63V,TP,7.5x5.5x14.	
....4 CS802	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002042	C-AL;220uF,20%,10V,GP,TP,6.3x11,5	
....4 C701	2401-002288	C-AL;470uF,20% 25V,WT,TP,10x20,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003704	C-AL;1UF," æ20%,100V,WT,TP,5X11MM.5	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
⚠ 4 FD802S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
....4 FD801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 FD801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 PCB	AA41-00839A	PCB-POWER;SP50L2HX,FR-4,2L,A,1.6T,245X33	S.N.A
....4 GT806	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT805	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT804	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
⚠ ...3 HS802S	BP96-00084B	ASSY HEAT SINK P;H/S,SCREW,UGF10GCT,FFPF	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0083	0402-001383	DIODE-RECTIFIER;MBRF10100CT,100V,10A,ITO	
....4 T0083	0402-001446	DIODE-RECTIFIER;FFPF10U20DN,200V,10A,TO-	
....4 T0083	0402-001546	DIODE-RECTIFIER;UGF10GCT,400V,10A,ITO-22	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4 CIS	BP62-00011A	HEAT SINK-ES;L62A,A6063S,T2.0,26,60	S.N.A
⚠ ...3 PD801S	BP39-00086A	LEAD CONNECTOR;L63A/SP50L2HX,UL2464#22,U	
...3	6103-001055	SUPPORTER;DAMT-4N,L2,NTR,NYLON6/6	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 C701	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
..2 T0137	BP94-00137G	ASSY PCB MISC-LED;SP50L2HX/XEC,L63A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-004484	CONNECTOR-HEADER;BOX,5P,1R,2mm,STRAIGHT,	S.N.A
...3	AA41-00699A	PCB-LED;SVP-50L2H,FR-1,1L,A,1.6T,245X245	S.N.A
...3 DL01	AA96-30001C	ASSY LED GUIDE;-,AA61-50055A,DL-G7RA,-	S.N.A
...3 DL03	AA96-30007A	ASSY LED GUIDE;-,AA61-50055A,DL-G7GA,GRE	S.N.A
...3 DL02	AA96-30007A	ASSY LED GUIDE;-,AA61-50055A,DL-G7GA,GRE	S.N.A
...3	BP39-00085A	LEAD CONNECTOR;L63A/SP50L2HX,UL2835#28,U	
..2 CIS	BP94-00312A	ASSY PCB MISC-MASTER S/W;SVP-61L2HX,L56A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
⚠ ...3 SW811S	3403-000179	SWITCH-PUSH;250V,5A,DPST,-,JPW-2104B	
...3 T0076	AA39-20179A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YFH800-	
...3	BP97-00207A	ASSY AUTO;SVP-61L2HX,L56A	S.N.A
....4 PCB	AA41-00818A	PCB-61 MASTER S/W;SVP-61L2HX,FR-1,1L,A,	S.N.A
....4 GT1	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT2	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT3	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 EY1	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY2	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY3	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY4	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
..2	BP94-00504A	ASSY PCB MISC-SIDE KEY;SP61L2HX/XEC,L63A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SW06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SW01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 CN906	3711-001031	CONNECTOR-HEADER;BOX,6P,1R,2.5MM,ANGLE,S	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 CNY02A	BP39-00074A	LEAD CONNECTOR;L63A/SP50L2HX,UL2835#28,U	
...3	BP97-00512A	ASSY AUTO-SIDE KEY;SP61L2HX/XEC,L63A	S.N.A
....4 RY03	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY07	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY05	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY02	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY01	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY04	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 0	AA41-00790A	PCB-61 KEY CONTROL;3PLCD,FR-1,1L,A,1.6T	S.N.A
...3	BP64-00129A	KNOB-MASTER,ASSY;61L2,DO,ABS,HB,GRAY,SVM	
....4 CIS7	AA61-60003E	SPRING ETC-CS;-,SUS304,-,-,OD8,N5,OD8,-,	S.N.A
....4 T0025	AA64-01795C	KNOB-MASTER;50L2,ABS,HB,GRAY,SVM-3012	
....4 T0024	BP64-00072A	KNOB-FAMILY;617W,ABS HB,GRAY	
....4 T0138	BP64-00074A	KNOB-HOLDER;617W,ABS HB,GRAY	
..2 CIS2	BP94-00504B	ASSY PCB MISC-SIDE A/V;SP61L2HX/XEC,L63A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-000616	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	S.N.A
...3 JAP01	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
...3 JAP02	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
...3 CN108A	BP39-00077C	LEAD CONNECTOR;SP61L2HX,UL2464#26,UL/CSA	S.N.A
...3	BP97-00302A	ASSY AUTO-SIDE A/V;SP61L2HX/XEC,L63A	S.N.A
....4 RP03	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RP02	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 LP02	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
....4 LP01	2701-000101	INDUCTOR-AXIAL;1.2uH,10%,2.5x3.4mm	
....4 PCB	AA41-00789A	PCB-50/61 RCA JACK;3PLCD,FR-1,1L,A,1.6T	S.N.A
..2 CIS	BP95-00067A	ASSY SUB-AUDIO;ALADDIN PROJECT	
...3 CND601	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	
...3 LD607	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD608	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD609	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD610	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD603	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD604	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD605	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 LD606	AA27-00119A	COIL CHOKE;10uH,-,10uH,10%,0.07,0.1ohm M	
...3 IC602	BP96-00141A	ASSY HEAT SINK P;H/S,SPRING,TA2020,OIL S	S.N.A
...3 IC603	BP96-00141A	ASSY HEAT SINK P;H/S,SPRING,TA2020,OIL S	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0085	1201-001885	IC-AUDIO AMP;TA2020-020,SSIP,32P,649MIL	
....4 CIS	BP61-00129A	BRACKET-TR;,617W,T0.4,SUS-1	S.N.A
....4 CIS	BP62-00013A	HEAT SINK-PS;HLM507W,A1050S,T1.0,21.446	S.N.A
...3	BP97-00189A	ASSY AUTO;ALADDIN PROJECT	S.N.A
....4 RD631	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 RD630	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 RD629	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 RD628	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
....4 CD668	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD667	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD666	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD670	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD671	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD672	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD649	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD650	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD651	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD657	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD656	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD654	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 CD674	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD673	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD669	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD642	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD653	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CD658	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C701	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4	BP97-00158A	ASSY SMD;ALADDIN PROJECT	S.N.A
.....5 DD601	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 DD602	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 DZ016	0403-001282	DIODE-ZENER;BZT52-C15,13.8-15.6,410MW,SO	
.....5 QD602	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 QD601	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 RD641	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RD640	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5 RD619	2007-000075	R-CHIP;220OHM,5%,1/10W,TP,1608	
.....5 RD618	2007-000075	R-CHIP;220OHM,5%,1/10W,TP,1608	
.....5 RD616	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
.....5 RD615	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
.....5 RD614	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
.....5 RD613	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
.....5 RD609	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD608	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD607	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD610	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD611	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD612	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD601	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD602	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD603	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD606	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD605	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD604	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
.....5 RD642	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RD638	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RD637	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5 RD633	2007-000093	R-CHIP;20KOHM,5%,1/10W,TP,1608	
.....5 RD632	2007-000093	R-CHIP;20KOHM,5%,1/10W,TP,1608	
.....5 RD627	2007-000093	R-CHIP;20KOHM,5%,1/10W,TP,1608	
.....5 RD626	2007-000093	R-CHIP;20KOHM,5%,1/10W,TP,1608	
.....5 RD622	2007-000097	R-CHIP;47KOHM,5%,1/10W,TP,1608	
.....5 RD643	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5 RD617	2007-000121	R-CHIP;820OHM,5%,1/10W,TP,1608	
.....5 RD621	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
.....5 RD620	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
.....5 RD623	2007-001175	R-CHIP;8.2Kohm,1%,1/16W,DA,TP,1608	
.....5 RD636	2007-001175	R-CHIP;8.2Kohm,1%,1/16W,DA,TP,1608	
.....5 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000697	C-CERAMIC,CHIP;0.002NF,0.25PF,50V,C0G,TP	
.....5 C120	2203-000697	C-CERAMIC,CHIP;0.002NF,0.25PF,50V,C0G,TP	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 LD611	2703-002327	INDUCTOR-SMD;3.9UH,55,3.2X2.5X2.2MM	
.....5 LD602	2703-002327	INDUCTOR-SMD;3.9UH,55,3.2X2.5X2.2MM	
.....5 LD601	2703-002327	INDUCTOR-SMD;3.9UH,55,3.2X2.5X2.2MM	
.....5 XD601	2801-003843	CRYSTAL-SMD;18.432MHz,30ppm,28-AAN,20pF,	
.....5 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
.....5 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
.....5 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
.....5 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
.....5 RD624	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
.....5 RD625	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
.....5 RD634	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
.....5 RD635	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
.....5 IC601	1204-002054	IC-SOUND PROCESSOR;MSP3452G-B3,PQFP,80P,	
.....5 RD644	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5 RD639	2007-000130	R-CHIP;39KOHM,5%,1/10W,TP,1608	
.....5 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
.....50	AA41-00704B	PCB;SP43L2HX/50L2HX,2,L63A,2	S.N.A
....4 C701	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4 C701	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4 RD645	2003-002288	R-METAL OXIDE(S);2.2KOHM,5%,2W,AF,TP,3.9	
....4 RD646	2003-002288	R-METAL OXIDE(S);2.2KOHM,5%,2W,AF,TP,3.9	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2 T0132	BP94-00139Z	ASSY PCB MISC-DIGITAL;SP50L2HXX/SAP,L63A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SW902	3404-000176	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3 JA401	3701-000003	CONNECTOR-DSUB;15P,3R,FEMALE,ANGLE,AUF	
...3 JA402	3701-001221	CONNECTOR-DSUB;24P+4P,3R,FEMALE,ANGLE,AU	
...3 JA403	3701-001264	CONNECTOR-DSUB;9P,2R,MALE,ANGLE,AUF	
...3 CN03	3702-001137	CONNECTOR-RIBBON;20P,FEMALE,STRAIGHT,AU1	
...3 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
...3 CN02	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
...3	BP61-00195A	BRACKET-EMI,MDR;SP50L2,PBS,T0.2	S.N.A
...3	BP61-00196A	BRACKET-EMI,DIG;SP50L2,PBS,T0.2	S.N.A
...3	BP97-00483A	ASSY SMD-MICOM;EUROPE,TM_ALDP06	S.N.A
....4 D415	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D414	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D413	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D412	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D416	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D417	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D418	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 D451	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D452	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D411	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D401	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D402	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D403	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D404	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D405	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D410	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D409	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D408	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D407	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D419	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
....4 D426	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D425	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
....4 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
....4 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
....4 DZ016	0403-000617	DIODE-ZENER;RLZ30B,27.7/29.13V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 Q905	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 Q903	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
...4 Q802	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 Q801	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 Q906	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
...4 Q904	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
....4 Q910	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
....4 Q909	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
....4 Q902	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
....4 Q901	0505-001372	FET-SILICON;FDV303N,N,25V,0.68,0.6OHM,0.	
....4 LD01	0601-001313	LED;CHIP,GRN,2x1.8mm,565nm	
....4 IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
....4 IC104	0801-002559	IC-CMOS LOGIC;74LVX74,D FLIP-FLOP,TSSOP,	
....4 IC606	0802-001025	IC-BICMOS LOGIC;74LCX374,D FILP-FLOP,TSS	
....4 IC804	1001-001067	IC-ANALOG SWITCH;QS34X245-Q3,CMOS,TQSOP,	
....4 IC803	1001-001067	IC-ANALOG SWITCH;QS34X245-Q3,CMOS,TQSOP,	
....4 IC108	1002-001179	IC-A/D CONVERTER;AD9884,8BIT,QFP,128P-,	
....4 IC108	1002-001343	IC-A/D CONVERTER;AD9888KS-100,-,MQFP,128	
⚠ 4 IC402	1003-001391	IC-DISPLAY DRIVER;FLI2200,QFP,176P,945MI	
....4 IC604	1003-001503	IC-DISPLAY DRIVER;SNI,QFP,208P,28X28MM,-	
....4 IC110	1006-001076	IC-DRIVER/RECEIVER;232,SOP,16P,300MIL,DU	
....4 IC112	1103-000129	IC-EEPROM;24C02,256x8BIT,SOP,8P,150MIL,1	
....4 IC112	1103-000129	IC-EEPROM;24C02,256x8BIT,SOP,8P,150MIL,1	
....4 IC112	1103-001147	IC-EEPROM;24256,256KBIT,SOP,8P,150MIL,-,	
....4 IC113	1105-001305	IC-DRAM;4S641632,1Mx16x4Bit,TSOP,54P,400	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC113	1105-001336	IC-DRAM;4S643232,512Kx32x4Bit,TSOP,86P,4	
....4 IC115	1107-001087	IC-FLASH MEMORY;29LV160,1Mx16BIT,SOP,48P	
....4 IC407	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P,1	
....4 IC904	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P-,PLASTI	
⚠ 4 IC405	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P-,PLASTI	
....4 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
....4 T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
....4 T0087	1203-002074	IC-POSI.FIXED REG.;MIC39150,TO-263,3P-,	
....4 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P-,PL	
....4 T0123	1203-002351	IC-VOLTAGE REGULATOR;LF25C,DPAK,3P,240MI	
....4 IC118	1204-001926	IC-VIDEO PROCESS;VPC3230D-C5,PQFP,80P,-,	
....4 IC118	1204-001926	IC-VIDEO PROCESS;VPC3230D-C5,PQFP,80P-,	
....4 IC118	1204-001990	IC-VIDEO PROCESS;ASI500,BGA,316P,27X27MM	
....4 IC901	1204-002105	IC-DECODER;SDA6001-B12,MQFP,128P,28x28mm	
....4 IC120	1205-001778	IC-TRANSMITTER;SII160CT100,TQFP,100P,551	
....4 IC501	1205-002198	IC-RECEIVER;SII169CT100,LQFP,100P,14X14M	
....4 R521	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R522	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R540	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R541	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R544	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R546	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R549	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R552	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R553	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R493	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R504	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R506	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R508	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R509	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R514	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R517	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R518	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R520	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R589	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R590	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R592	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R702	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R803	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R804	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R901	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R902	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R950	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R557	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R558	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R560	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R562	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R572	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R573	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R576	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R583	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R586	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1108	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1109	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1110	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1114	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1115	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1116	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1117	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1118	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R431	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1048	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1049	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1050	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1051	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1056	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1078	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1079	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1080	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1091	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R471	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R476	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R479	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R480	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R481	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R482	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R484	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R485	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R491	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R432	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R439	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R443	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R450	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R465	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R470	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R469	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R468	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R467	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R1037	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R601	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R599	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R591	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R612	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R613	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R980	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R550	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R1107	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R434	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R436	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R543	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R528	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R442	2007-000071	R-CHIP;22OHM,5%,1/10W,TP,1608	
....4 R1090	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R559	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R561	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R939	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R940	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R976	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R977	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1083	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1084	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1085	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1086	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1089	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1088	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R1087	2007-000072	R-CHIP;47OHM,5%,1/10W,TP,1608	
....4 R515	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R513	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R512	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R511	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R510	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R503	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R516	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R538	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R537	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R535	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R533	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R532	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R523	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R494	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R489	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R488	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R487	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R486	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R475	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R495	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R502	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R500	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R499	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R498	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R497	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R496	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R945	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R944	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R943	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R938	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R937	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R935	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R970	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R995	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R993	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R992	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R991	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R990	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R973	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R593	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R585	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R584	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R579	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R578	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R574	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R594	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R934	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R933	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R932	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R931	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R600	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R596	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R474	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1022	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1021	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1020	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1019	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1018	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1017	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1024	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1030	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1029	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R1028	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1027	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1026	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1025	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1008	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1007	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1006	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1005	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1003	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1002	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1009	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1016	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1015	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1014	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1012	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1011	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1010	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R457	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R456	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R455	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R454	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R453	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R449	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R458	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R473	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R463	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R462	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R461	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R460	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R459	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R402	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1052	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1035	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1034	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1032	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R1031	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R407	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R448	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R447	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R445	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R418	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R416	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R409	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R981	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R982	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R812	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R525	2007-000075	R-CHIP;220OHM,5%,1/10W,TP,1608	
....4 R927	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R925	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R580	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R547	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R437	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R906	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R598	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R597	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R577	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R911	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R920	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R923	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R926	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R972	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R555	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R1036	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R1113	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R408	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R410	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R492	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R501	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R524	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R534	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R539	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R401	2007-000080	R-CHIP;2KOHM,5%,1/10W,TP,1608	
....4 R505	2007-000082	R-CHIP;3.3KOHM,5%,1/10W,TP,1608	
....4 R963	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R964	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R965	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R966	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R962	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R961	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R960	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R959	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R958	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R999	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R996	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R989	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R987	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R985	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R983	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R971	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R968	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R967	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R929	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R701	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R536	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R531	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R414	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R412	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R1060	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R1057	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R957	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R956	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R955	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R954	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R953	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R930	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R947	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R951	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R952	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R1001	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R811	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R813	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R908	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R910	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R588	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R587	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R582	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R581	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R969	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R948	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R946	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R941	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R464	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R451	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R446	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R441	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R417	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R415	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R411	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R1103	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R575	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R548	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R526	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R490	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R466	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R477	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R478	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R483	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
....4 R921	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R554	2007-000109	R-CHIP;1MOHM,5%,1/10W,TP,1608	
....4 R433	2007-000118	R-CHIP;390OHM,5%,1/10W,TP,1608	
....4 R545	2007-000123	R-CHIP;1.5KOHM,5%,1/10W,TP,1608	
....4 R919	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R936	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R975	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R978	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R918	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R1059	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R1062	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R907	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R909	2007-000124	R-CHIP;2.2KOHM,5%,1/10W,TP,1608	
....4 R979	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R440	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R1063	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R426	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R427	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R428	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R551	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R903	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R904	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R425	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R1058	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R1061	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R421	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R422	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R423	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R424	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
....4 R519	2007-000402	R-CHIP;150OHM,5%,1/10W,TP,1608	
....4 R472	2007-000539	R-CHIP;200OHM,5%,1/10W,TP,1608	
....4 R1111	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
....4 R542	2007-000882	R-CHIP;4.7OHM,5%,1/10W,TP,1608	
....4 R444	2007-001044	R-CHIP;56OHM,5%,1/10W,TP,1608	
....4 R438	2007-001044	R-CHIP;56OHM,5%,1/10W,TP,1608	
....4 R605	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R604	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R603	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R429	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R607	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R608	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R609	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R949	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R420	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R1075	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R1076	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R1077	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R403	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R419	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R406	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R405	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R404	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 RW810	2011-000002	R-NETWORK;22OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW807	2011-000002	R-NETWORK;22OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW604	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW605	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW606	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW701	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW702	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW506	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW507	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW601	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW602	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW603	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW703	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW802	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW803	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW804	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW805	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW806	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW704	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW705	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW706	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW707	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW801	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW505	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW106	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW107	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW108	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW109	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW401	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW101	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW102	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW103	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW104	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW105	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW402	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW408	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW501	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW502	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW503	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW504	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW403	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW404	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RW405	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW406	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW407	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
....4 RW711	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW712	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW713	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW710	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW709	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 RW708	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000142	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10% 50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000274	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000274	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000280	C-CERAMIC,CHIP;0.01NF,0.5PF,50V,C0G,TP,1	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000405	C-CERAMIC,CHIP;0.18NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000405	C-CERAMIC,CHIP;0.18NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
....4 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000552	C-CERAMIC,CHIP;0.02NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000575	C-CERAMIC,CHIP,220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000659	C-CERAMIC,CHIP;0.27NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-000727	C-CERAMIC,CHIP;3.9nF,10%,50V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000761	C-CERAMIC,CHIP;330nF,10%,16V,X7R,TP,2012	
....4 C120	2203-000838	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000839	C-CERAMIC,CHIP;0.39NF,5%,50V,C0G,TP,2012	
....4 C120	2203-000844	C-CERAMIC,CHIP;39nF,10%,50V,X7R,TP,2012,	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
....4 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001155	C-CERAMIC,CHIP;0.068nF,5%,50V,NP0,TP,160	
....4 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
....4 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
....4 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
....4 C120	2203-001170	C-CERAMIC,CHIP;0.006nF,0.25pF,50V,NP0,TP	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001402	C-CERAMIC,CHIP;220nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001607	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,1608	
....4 C120	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
....4 C120	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
....4 C120	2203-001680	C-CERAMIC,CHIP;68nF,20%,50V,Z5U,TP,2012	
....4 C120	2203-001680	C-CERAMIC,CHIP;68nF,20%,50V,Z5U,TP,2012	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-006170	C-CERAMIC,CHIP;220NF,10%,16V,X7R,TP,1608	
....4 C825	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C486	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C464	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C1044	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C565	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C577	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C595	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C929	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C930	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C416	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C417	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C419	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C420	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C564	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C944	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C934	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C723	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C654	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C807	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C801	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
....4 C436	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
....4 C431	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
....4 C429	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
....4 C427	2402-001059	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
....4 C404	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
....4 C922	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C805	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C774	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C765	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C750	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C727	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C995	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C989	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C982	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C972	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C961	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C952	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C474	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C467	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C422	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C1041	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C1021	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C1006	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C611	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C566	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C550	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C476	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C524	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C529	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C978	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C974	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C720	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C615	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C525	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C574	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C614	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 X601	2801-003667	CRYSTAL-SMD;14.3182MHZ,50PPM,28-AAN,16,5	
....4 X902	2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	
....4 X402	2801-004004	CRYSTAL-SMD;20.25MHz,20ppm,28-AAN,13pF,2	
....4 X401	2801-004004	CRYSTAL-SMD;20.25MHz,20ppm,28-AAN,13pF,2	
....4 X901	2801-004117	CRYSTAL-SMD;6MHZ,30PPM,28-ABX,20PF,150OH	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2

Loc. No.	Code No.	Description ; Specification	Remark
....4 D121	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D101	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D102	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D114	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D115	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 D116	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
....4 Q122	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
....4 Q132	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q131	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q126	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q125	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q124	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q123	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q121	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q139	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q138	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q137	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q136	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q135	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q134	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q133	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q120	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q112	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q111	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q110	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q109	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q108	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q106	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q105	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q119	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q118	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q117	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q116	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q115	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q114	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q113	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
....4 Q101	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
....4 IC104	0801-002279	IC-CMOS LOGIC;74VHC4053,MUX,SOP,16P,150M	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
....4 IC704	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
....4 IC106	1001-001204	IC-VIDEO SWITCH;TEA6415CD,8INPUT-6OUTPUT	
....4 IC103	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
....4 IC131	1204-001814	IC-SELECTOR;CXA2151Q,QFP,48P,144MIL,PLAS	
....4 R353	2007-000052	R-CHIP;10KOHM,1%,1/10W,TP,1608	
....4 R229	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R230	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R361	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R362	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R136	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R115	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R132	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R133	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R134	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
....4 R291	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R290	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R265	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R263	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R201	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R296	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R295	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R294	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R293	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R292	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R192	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R183	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R182	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R181	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R180	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R179	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R191	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R187	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R186	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R185	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R184	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R297	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R354	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R345	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R344	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R343	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R342	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R370	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R369	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R368	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R367	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R355	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R341	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R333	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R318	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R317	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R316	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R298	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R338	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R337	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R336	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R335	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R334	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R178	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R129	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R128	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R127	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R126	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R125	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R149	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R148	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R147	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R131	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R130	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R124	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R117	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R116	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R109	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R106	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R105	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R123	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R122	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R121	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R120	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R119	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R151	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R172	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R171	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R170	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R169	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R168	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R177	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R176	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R175	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R174	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R173	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R167	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R158	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R157	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R154	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R153	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R152	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R166	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R165	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R164	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R162	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R161	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
....4 R305	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R304	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R303	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R302	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R306	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R307	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R313	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R314	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R315	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R188	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R194	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R238	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R239	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R240	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R301	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R300	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R299	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R271	2007-000077	R-CHIP;470OHM,5%,1/10W,TP,1608	
....4 R266	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R267	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R268	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R269	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R245	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R244	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R243	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R242	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R394	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R393	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R392	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R391	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R385	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R383	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R381	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R270	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R213	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R212	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R209	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R206	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R204	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R203	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R202	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R118	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R241	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R226	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R224	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R223	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R214	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R220	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R221	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R222	2007-000078	R-CHIP;1KOHM,5%,1/10W,TP,1608	
....4 R356	2007-000080	R-CHIP;2KOHM,5%,1/10W,TP,1608	
....4 R103	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
....4 R348	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
....4 R346	2007-000087	R-CHIP;6.8KOHM,5%,1/10W,TP,1608	
....4 R284	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R283	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R282	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R281	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R280	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R289	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R288	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R287	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R286	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R285	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R279	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R273	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R272	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R114	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R111	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R108	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R278	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R277	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R276	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R275	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R274	2007-000094	R-CHIP;22KOHM,5%,1/10W,TP,1608	
....4 R112	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R104	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R102	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R101	2007-000134	R-CHIP;33KOHM,5%,1/10W,TP,1608	
....4 R349	2007-000450	R-CHIP;180OHM,5%,1/10W,TP,1608	
....4 R347	2007-000450	R-CHIP;180OHM,5%,1/10W,TP,1608	
....4 R193	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
....4 R189	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
....4 R260	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R261	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R262	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R264	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R319	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R259	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R236	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R255	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R256	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R257	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R258	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R380	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R382	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R384	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R386	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R387	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R379	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R320	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R323	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R326	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R339	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R340	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R235	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R146	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R155	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R156	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R160	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R207	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R145	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R140	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R141	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R142	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R143	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R144	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R228	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R231	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R232	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R233	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R234	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R227	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R210	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R211	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R215	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R217	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R225	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
....4 R205	2007-001247	R-CHIP;91OHM,5%,1/10W,DA,TP,2012	
....4 R139	2007-001247	R-CHIP;91OHM,5%,1/10W,DA,TP,2012	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000384	C-CERAMIC,CHIP;0.015NF,5%,50V,C0G,TP,160	
....4 C120	2203-000426	C-CERAMIC,CHIP;0.018NF,5%,50V,C0G,TP,160	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
...4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
....4 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
....4 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
....4 C120	2203-006170	C-CERAMIC,CHIP;220NF,10%,16V,X7R,TP,1608	
....4 C209	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C208	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C207	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C206	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C205	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C210	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C215	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C214	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C213	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C212	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C211	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C147	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C146	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C145	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C144	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C139	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C148	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C204	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C203	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C202	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C201	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C174	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 C166	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C111	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 C222	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C223	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C224	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C225	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C221	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C217	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C218	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C219	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C220	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
....4 C288	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C273	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C270	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
....4 C260	2402-001044	C-AL,SMD;100UF,20%,25V,GP,TP,8.3X8.3X6.3	
....4 C289	2402-001081	C-AL,SMD;100uF,20%,25V,WT,TP,8.3x8.3x10	
....4 C278	2402-001081	C-AL,SMD;100uF,20%,25V,WT,TP,8.3x8.3x10	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C277	2402-001081	C-AL,SMD;100uF,20%,25V,WT,TP,8.3x8.3x10	
....4 C261	2402-001081	C-AL,SMD;100uF,20%,25V,WT,TP,8.3x8.3x10	
....4 C106	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	
....4 C247	2402-001159	C-AL,SMD;3.3UF,20%,50V,WT,TP,4X5.2MM	
....4 C124	2402-001159	C-AL,SMD;3.3UF,20%,50V,WT,TP,4X5.2MM	
....4 C121	2402-001159	C-AL,SMD;3.3UF,20%,50V,WT,TP,4X5.2MM	
....4 C253	2402-001160	C-AL,SMD;330UF,20%,16V,WT,TP,1008	
....4 C250	2402-001160	C-AL,SMD;330UF,20%,16V,WT,TP,1008	
....4 C280	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
....4 C269	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
....4 C264	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
....4 C189	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C191	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C231	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C256	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C285	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C187	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C126	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C129	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C182	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C183	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C185	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
....4 C230	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C125	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C120	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C117	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
....4 C272	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 C244	2409-001051	C-ORGANIC;82UF,20%,6.3V,WT,TP,6.3*5.9MM,	
....4 L122	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L121	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L120	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L119	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L118	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L127	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L126	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L125	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L124	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L123	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L111	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L105	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L104	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L103	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L102	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L101	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L110	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L109	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L108	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L107	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 L106	2703-000125	INDUCTOR-SMD;10uH,10%,1.25x2x1.25mm	
....4 X101	2801-001473	CRYSTAL-SMD;4MHz,50ppm,28-AAN,18pF,150oh	
....4 X102	2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
....4 0	AA41-00672B	PCB MAIN;SP43L2HX/50L2HX,4,L63A,1	S.N.A
....4 T0119	MD09-00137A	MICOM;P-PCFM-012,P-PCFM-012,32,5V,12M	IC
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
....4 G101	3301-001595	CORE-FERRITE BEAD;AB,1KOHM,7.0X6.0X4.5MM	
...3	MD39-00077A	CBF IF;PPR-2200,1P,UL1365#26,100MM,UL/CS	
...3	BP63-00120A	GASKET;SP50L2HX,CONDUCTIVE-FABRIC,4.0mm,	S.N.A
...3 TU01	AA40-00094A	TUNER;TCLW3101PD16A(S),PAL/SECAM,181CH,3	
...3 TU02	AA40-00095A	TUNER;TCPW3001PC16A(S),PAL/SECAM,181CH,3	

ASSY MISC-ENINGE,MECHA

1	BP91-00838C	ASSY MISC-ENINGE,MECHA;61 LCD ENGINE,PH	S.N.A
..2	BP96-00307C	ASSY ENGINE P-LCD PC61;61 LCD,PHILIPS	S.N.A
...3 T0081	6003-000279	SCREW-TAPTITE;BH,+,B,M3,L20,ZPC(YEL),SWC	S.N.A
...3 T0081	6003-000279	SCREW-TAPTITE;BH,+,B,M3,L20,ZPC(YEL),SWC	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
...3 T0081	6003-000365	SCREW-TAPTITE;BH,+,S,M3,L8,ZPC(YEL),SWRC	S.N.A
...3 T0081	6003-000365	SCREW-TAPTITE;BH,+,S,M3,L8,ZPC(YEL),SWRC	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HI,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HI,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HI,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HI,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HI,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HI,+,PC,	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HI,+,PC,	S.N.A
...3	AA61-00136A	BRACKET-LAMP,CONNECT;436W,SECC,T1.0,-,-,	S.N.A
...3	AA63-00140A	SPACER-FAN;436W,CR SPONGE,-,-,-,BLK,-,	S.N.A
...3	AA65-30102A	CLAMPER CORE-WIRE;-,NYLON,66,-,GRA,-	S.N.A
...3 CIS5	AA91-00294A	ASSY-FILTER;-,V0,PU-FORM BLK,43J6	
....4	AA60-00032A	SPACER-FILTER;50J6,P/U-FOAM V0 16,-,-,	S.N.A
....4	AA61-00160B	HOLDER-FILTER;43J6,ABS,-,-,-,BLK,V0	S.N.A
...3 T0051	AA96-01084A	ASSY LENS P-MECHA;SP50L2HX/XEC,L63A	
...3	BN47-00003A	LAMP-UHP(P22);PHILIPS,65*70 PARABOLA,AC1	
...3	BN61-00174A	HOUSING-MECHA,BASE;50L2HX,ABS V0,BLK	S.N.A
...3	BN61-00176A	HOUSING-LAMP,MOUNT;50L2HX,PPS V0,BLK	S.N.A
...3	BN61-00177A	HOUSING-LAMP,HOLD;50L2HX,PPS V0,BLK	S.N.A
...3	BN61-00178A	HOLDER-LAMP;50L2HX,PPS V0,BLK	S.N.A
...3	BN61-00179A	GUIDE-LAMP;50L2HX,SECC,T1.0	S.N.A
...3	BN61-00180A	BRACKET-LAMP,COVER;50L2HX,AL 1050S,T1.0	S.N.A
...3	BN61-00211A	HOLDER-BALLAST;50L2HX,ABS V0,BLK	S.N.A
...3	BN61-00222A	BRACKET-FAN;50L2HX,SECC,T1.0	S.N.A
...3	BN63-00328A	COVER-DUCT,TOP;50L2HX,ABS,V0,BLK	S.N.A
...3	BN64-00131A	HANDLE-LAMP;50L2,SUS	S.N.A
...3 T0136	BP31-00001B	FAN;G9225L12B2-FS(WS),SP50L2HX,,,395mm W	
...3 T0136	BP31-00003A	FAN;G5015S12B2-RS(WS),SVP-61L2H,PBT,WIR	
...3	BP39-00075A	LEAD CONNECTOR;L63A/SP50L2HX,UL246#26,U	
...3	BP39-00076A	LEAD CONNECTOR;L63A/SP50L2HX,UL246#26,U	
...3	BP39-00078A	LEAD CONNECTOR;L63A/SP50L2HX,UL246#22,U	
...3 T0049	BP47-00009A	LAMP-BALLAST;EUC 120P/H00,120W	S.N.A
...3	BP60-00018A	SPACER-LENS;50L2,PU FORM V0,BLK	S.N.A
...3	BP60-00020A	SPACER-DUCT,OUT;50L2,CR SPONGE,BLK	S.N.A
...3	BP60-00023A	SPACER-DUST1;SP50L2HX,PU FORM,,,,,13,,	S.N.A
...3	BP60-00024A	SPACER-DUST2;SP50L2HX,PU FORM,,,,,8.0	S.N.A
...3	BP60-00025A	SPACER-DUST3;SP50L2HX,PU FORM,,,,,10,,	S.N.A
...3	BP60-00026A	SPACER-DUST4;SP50L2HX,PU FORM,,,,,4.0	S.N.A
...3	BP61-00153A	BRACKET-RMC;B3K,SECC T=1.0	S.N.A
...3	BP61-00163A	BRACKET-DUST;50L2,SPC,T0.5	S.N.A
...3	BP61-00165A	BRACKET-EARTH;50L2,AL,T1.0	S.N.A
...3	BP61-00197A	BRACKET-EMI,LCD;SP50L2HX,PBT,0.2,,,,	S.N.A
...3	BP62-00016A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,36	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3	BP63-00039A	COVER-LENS;50L2,HIPS VO BLK	S.N.A
...3	BP91-00766A	ASSY MISC-REMOCON;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 DZ016	0403-001331	DIODE-ZENER;MTZJ6.8A,6.29-6.63V,500mW,DO	
....4 R01	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C598	2201-000982	C-CERAMIC,DISC;10NF,+80-20%,50V,Y5V,TP,4	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 CN906	3711-004386	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	S.N.A
....4 PCB	AA41-00840A	PCB-REMOCON;SP50L2HX,FR-1,1L,A,1.6T,245X	S.N.A
....4 PRE01	BN32-00003A	MODULE REMOCON;346HF7,38KHZ,940NM,13*10*	
....4	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
....4 CN01A	BP39-00089A	LEAD CONNECTOR;SP50L2HX,UL2547#26,UL/CSA	
...3	BP91-00767A	ASSY MISC-DETECTOR S/W;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 SW1	3409-000178	SWITCH-LEVER;12V,100mA,SPDT,-,27deg	
....4 CCM	6001-001003	SCREW-MACHINE;BH,+,M2.6,L6,ZPC(BLK),SWRC	S.N.A
....4	AA41-00756A	PCB-COVER PROTERCTION;HLM507W/SPL,CEM-1,	S.N.A
....4	AA61-10185A	BRACKET-SENSOR;L3300,SECC,T1.0,-,-,-,-	S.N.A
....4 CN1	BP39-00026B	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#26,U	
...3	BP91-00773G	ASSY MISC-THERMOSTAT;SP50L2HX/XEC,L63A	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CN906	3711-000056	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,S	S.N.A
....4 CN2	4712-001011	THERMOSTAT;125/250V,15A/7.5A,105+-5C,95+	
....4	BP39-00043B	LEAD CONNECTOR;L63A/SP50L2HX,UL1007#22,U	
....4 0	AA41-00801C	PCB;HLM507W,2,2,1.6mm,40mm*15mm,L62A,30	S.N.A
...3 CIS1	BP94-00514A	ASSY PCB S-INTERFACE;SP61L2HX/XEC,L63A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CN906	3711-000015	CONNECTOR-HEADER;BOX,2P,1R,2.5MM,STRAIGH	S.N.A
....4 CN906	3711-000577	CONNECTOR-HEADER;BOX,10P,1R,2.5mm,STRAIG	
....4 CN906	3711-003942	CONNECTOR-HEADER;BOX,2P,1R,2mm,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004349	CONNECTOR-HEADER;BOX,3P,1R,2MM,STRAIGHT,	S.N.A
....4 CN906	3711-004379	CONNECTOR-HEADER;BOX,4P,1R,2MM,STRAIGHT,	S.N.A
....4	BP97-00513N	ASSY SMD-INTERFACE;SP61L2HX/XEC,L63A	S.N.A
.....5QS02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5QS01	0504-000154	TR-DIGITAL;KSR2102,PNP,200MW,10K/10K,SOT	
.....5ICS01	0904-001031	IC-I/O SUPPORT CHIP;8574,8BIT,SOP,16P,-,	
.....5RS07	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS08	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS09	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS13	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS15	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS02	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS03	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS04	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS05	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS06	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RS35	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS36	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS37	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS38	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS34	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS01	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS31	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS32	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS33	2007-000084	R-CHIP;4.7KOHM,5%,1/10W,TP,1608	
.....5RS23	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5RS22	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5RS21	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5CS20	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5CS18	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5CS14	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5CS01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5CS16	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	
.....5CS03	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5CN906	3711-004934	CONNECTOR-HEADER;BOX,5P,1R,1.25MM,SMD-A,	
.....50	AA41-00677B	PCB;SP61L2HX/XEC,2,L63A,4	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	BP96-00186A	ASSY MISC P-SHIELD CASE,TOP;SP50L2HX/XEC	S.N.A
....4	BN63-00333A	SHIELD-CASE,TOP;50L2HX,SPTE,T0.3	S.N.A
....4	BP63-00043A	SHIELD-CASE,PANEL;50L2,PBT,TO.2	S.N.A
...3	BP96-00187A	ASSY MISC P-SHIELD CASE,BOT;SP50L2HX/XEC	S.N.A
....4	BN63-00334A	SHIELD-CASE,BOT;50L2HX,SPTE,T0.5	S.N.A
....4	BP63-00044A	SHIELD-CASE,DUST;50L2,SPTE,TO.5	S.N.A
...3	BP96-00188A	ASSY MISC P-BRKT RAY;SP50L2HX/XEC,50L2	
....4	BP61-00164A	BRACKET-RAY;50L2,SPC,T0.5	S.N.A
....4	BP61-00182A	BRACKET-RAY2;50L2,SPC,TO.5,BLK	S.N.A
...3 CIS4	BP94-00474A	ASSY PCB S-LCD DRIVER;SP50L2HX/XEC,L63A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 CNL101	3702-001137	CONNECTOR-RIBBON;20P,FEMALE,STRAIGHT,AU1	
....4 CN906	3711-001154	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	S.N.A
....4	BP97-00188A	ASSY SMD;0	S.N.A
.....5DL109	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL108	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL107	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL110	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL171	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL172	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL101	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL102	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL103	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL104	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL105	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5DL106	0401-000008	DIODE-SWITCHING;DAN217,80V,100mA,SOT-23,	
.....5IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
.....5IC104	0801-002267	IC-CMOS LOGIC;74LCX14,-,SOIC,14P,150MIL,	
.....5IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5IC107	1002-001310	IC-D/A CONVERTER;L3E06070D0A,10BITS,QFP,	
.....5IC107	1002-001334	IC-D/A CONVERTER;M62392FP,8BIT,SOP,24P,2	
.....5ICL501	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5ICL401	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5ICL301	1003-001482	IC-LEVEL DRIVER;L3E01031F0A,QFP,48P,7X7M	
.....5IC112	1103-001147	IC-EEPROM;24256,256KBIT,SOP,8P,150MIL,-,	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-000167	IC-OP AMP;358,SOP,8P,150MIL,DUAL,100V/mV	
.....5DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL,	
.....5DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL,	
.....5DU410	1201-001943	IC-OP AMP;EL2244CS,SOP,TP,8P,39MIL,DUAL,	
.....5T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
.....5T0087	1203-001359	IC-POSI.FIXED REG.;1086,TO-263,3P,15.8MM	
.....5IC012	1203-002470	IC-POSI.ADJUST REG.;FAN1616AS25X,SOT-223	
.....5ICL202	1203-002709	IC-VOL. REFERANCE;MAX875BCSA,SOIC,8P,4.9	
.....5IC118	1204-001975	IC-VIDEO PROCESS;L3E07050K0A,QFP,176P,24	
.....5RL302	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL301	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL270	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL269	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL268	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL267	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL266	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL265	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL262	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	
.....5RL340	2007-000070	R-CHIP;00HM,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5RL542	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL540	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL502	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL501	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL442	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL440	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL402	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL401	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL342	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL261	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL126	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL125	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL107	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL106	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL105	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL104	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL103	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL102	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL101	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL128	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL260	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL259	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL258	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL257	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL256	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL130	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL131	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL133	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL251	2007-000070	R-CHIP;0OHM,5%,1/10W,TP,1608	
.....5RL264	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RL263	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RL113	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RL112	2007-000074	R-CHIP;100OHM,5%,1/10W,TP,1608	
.....5RL115	2007-000080	R-CHIP;2KOHM,5%,1/10W,TP,1608	
.....5RL134	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5RL129	2007-000090	R-CHIP;10KOHM,5%,1/10W,TP,1608	
.....5RL207	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5RL206	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5RL205	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5RL204	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5RL203	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5RL202	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5RL201	2007-000102	R-CHIP;100KOHM,5%,1/10W,TP,1608	
.....5RL546	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5RL544	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5RL446	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5RL353	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5RL355	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5RL444	2007-000239	R-CHIP;1.5KOHM,1%,1/10W,TP,1608	
.....5RL121	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5RL122	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5RL123	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5RL124	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5RL117	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5RL118	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5RL119	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5RL120	2007-000309	R-CHIP;10OHM,5%,1/10W,TP,1608	
.....5RL447	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL445	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL360	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL358	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL356	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL449	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL551	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL549	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL547	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL545	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL451	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL248	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL246	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL242	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL241	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL240	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL249	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL354	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL255	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL254	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5RL252	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL250	2007-000669	R-CHIP;2Kohm,1%,1/16W,DA,TP,1608	
.....5RL247	2007-000701	R-CHIP;3.6Kohm,1%,1/16W,DA,TP,1608	
.....5RL245	2007-000701	R-CHIP;3.6Kohm,1%,1/16W,DA,TP,1608	
.....5RL553	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5RL552	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5RL453	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5RL361	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5RL362	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5RL452	2007-000869	R-CHIP;4.7KOHM,1%,1/10W,TP,1608	
.....5RWL101	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW216	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW215	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW214	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW213	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RWL102	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RWL107	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RWL106	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RWL105	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RWL104	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RWL103	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW212	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW205	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW204	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW203	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW202	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW201	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW206	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW211	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW210	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW209	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW208	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RW207	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5C120	2203-005005	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608	
.....5CL182	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5CL178	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5CL177	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5CL301	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5CL401	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5CL501	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
.....5CL270	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
.....5CL242	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
.....5CL240	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
.....5CL104	2402-000176	C-AL,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
.....5CL443	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL441	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL408	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL508	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL541	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL543	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL342	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL202	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL207	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL215	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL217	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL308	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL341	2402-001019	C-AL,SMD;2.2uF,20%,35V,GP,TP,3.3x3.3x5.	
.....5CL184	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5CL174	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5CL171	2402-001044	C-AL,SMD;100UF,20%,25V,GP,TP,8.3X8.3X6.3	
.....5CL216	2409-001029	C-ORGANIC;120uF,20%,6.3V,WT,TP,10.3x10.3	
.....5CL126	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
.....5CL117	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
.....5CL107	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
.....5CL106	2409-001035	C-ORGANIC;10uF,20%,10V,LZ,TP,5.4x4.3x4.3	
.....5CL206	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5CL201	2409-001049	C-ORGANIC;47UF,20%,6.3V,FX,TP,5X5.9MM,-	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5G101	3301-001404	CORE-FERRITE BEAD;AB,30ohm,20x1.25x1mm,2	
.....5CNL501	3708-001505	CONNECTOR-FPC/FFC/PIC;36P,0.5mm,SMD-A,SN	
.....5CNL401	3708-001505	CONNECTOR-FPC/FFC/PIC;36P,0.5mm,SMD-A,SN	
.....5CNL301	3708-001505	CONNECTOR-FPC/FFC/PIC;36P,0.5mm,SMD-A,SN	
.....5PCB	AA41-00673A	PCB-LCD DRIVER;3P LCD,FR-4,6L,A,1.6T,180	S.N.A
.....5ICL103	1205-002183	IC-RECEIVER;SII161BCT100,TQFP,100P,14X14	
.....5RL127	2007-000118	R-CHIP;390OHM,5%,1/10W,TP,1608	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	BN73-00048A	SILICON/RUBBER-BERGQUIST;L63A,SILICON,40	S.N.A
...3	BP39-00094A	LEAD CONNECTOR;HLM507W,UL1571#30,UL/CSA,	S.N.A
...3 T0116	BP39-00032C	CBF-MDR CABLE;SP50L2HX,UL20276,UL,20P,23	S.N.A

ASSY ACCESSORY

1	M0016	BP92-00289A	ASSY ACCESSORY;SP50L2HX/XEC,L63A	S.N.A
..2	CIS	4301-000103	BATTERY-ALKALINE;1.5V,750mAH,AAA,10.5x44	
..2	T0116	AA39-40001B	CABLE RCA;,1500MM	
..2	S/N	AA68-00291A	MANUAL-S/NETWORK;-,SPANISH,-,B5,W/P100G,	S.N.A
..2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2	CIS	BP68-00130A	MANUAL USERS;SP43L2HX/50L2HX,EN/FR/DE/NL	S.N.A
..2	T0074	BP59-00025A	REMOCON;SP50L2HX,TM63,L63,48,G6671B,ALAD	S.N.A

ASSY P/MATERIAL

1	BP92-00482A	ASSY P/MATERIAL;SVP-61L2HX,L62A	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
..2	AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2	AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2	AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	S.N.A
..2	AA69-30036A	BAG-PE;HDPE,T0.02,2000,1800,-,-,555J,	S.N.A
..2	6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A

ASSY FIXING

1		BP91-00839A	ASSY FIXING;3PANEL,L63A,50	S.N.A
..2	T0081	6003-000269	SCREW-TAPTITE;BH,+,S,M3,L6,ZPC(YEL),SWRC	S.N.A
..2	T0076	AA39-20010H	LEAD CONNECTOR-ASSY;,1P,300,YFH800-01,S,	
⚠ ..2	T0066	AA96-20130K	ASSY POWER CORD;,CP2/NO(4.0R),H/S 700MM,	

4. PCB Diagrams

4-1 MAIN PCB

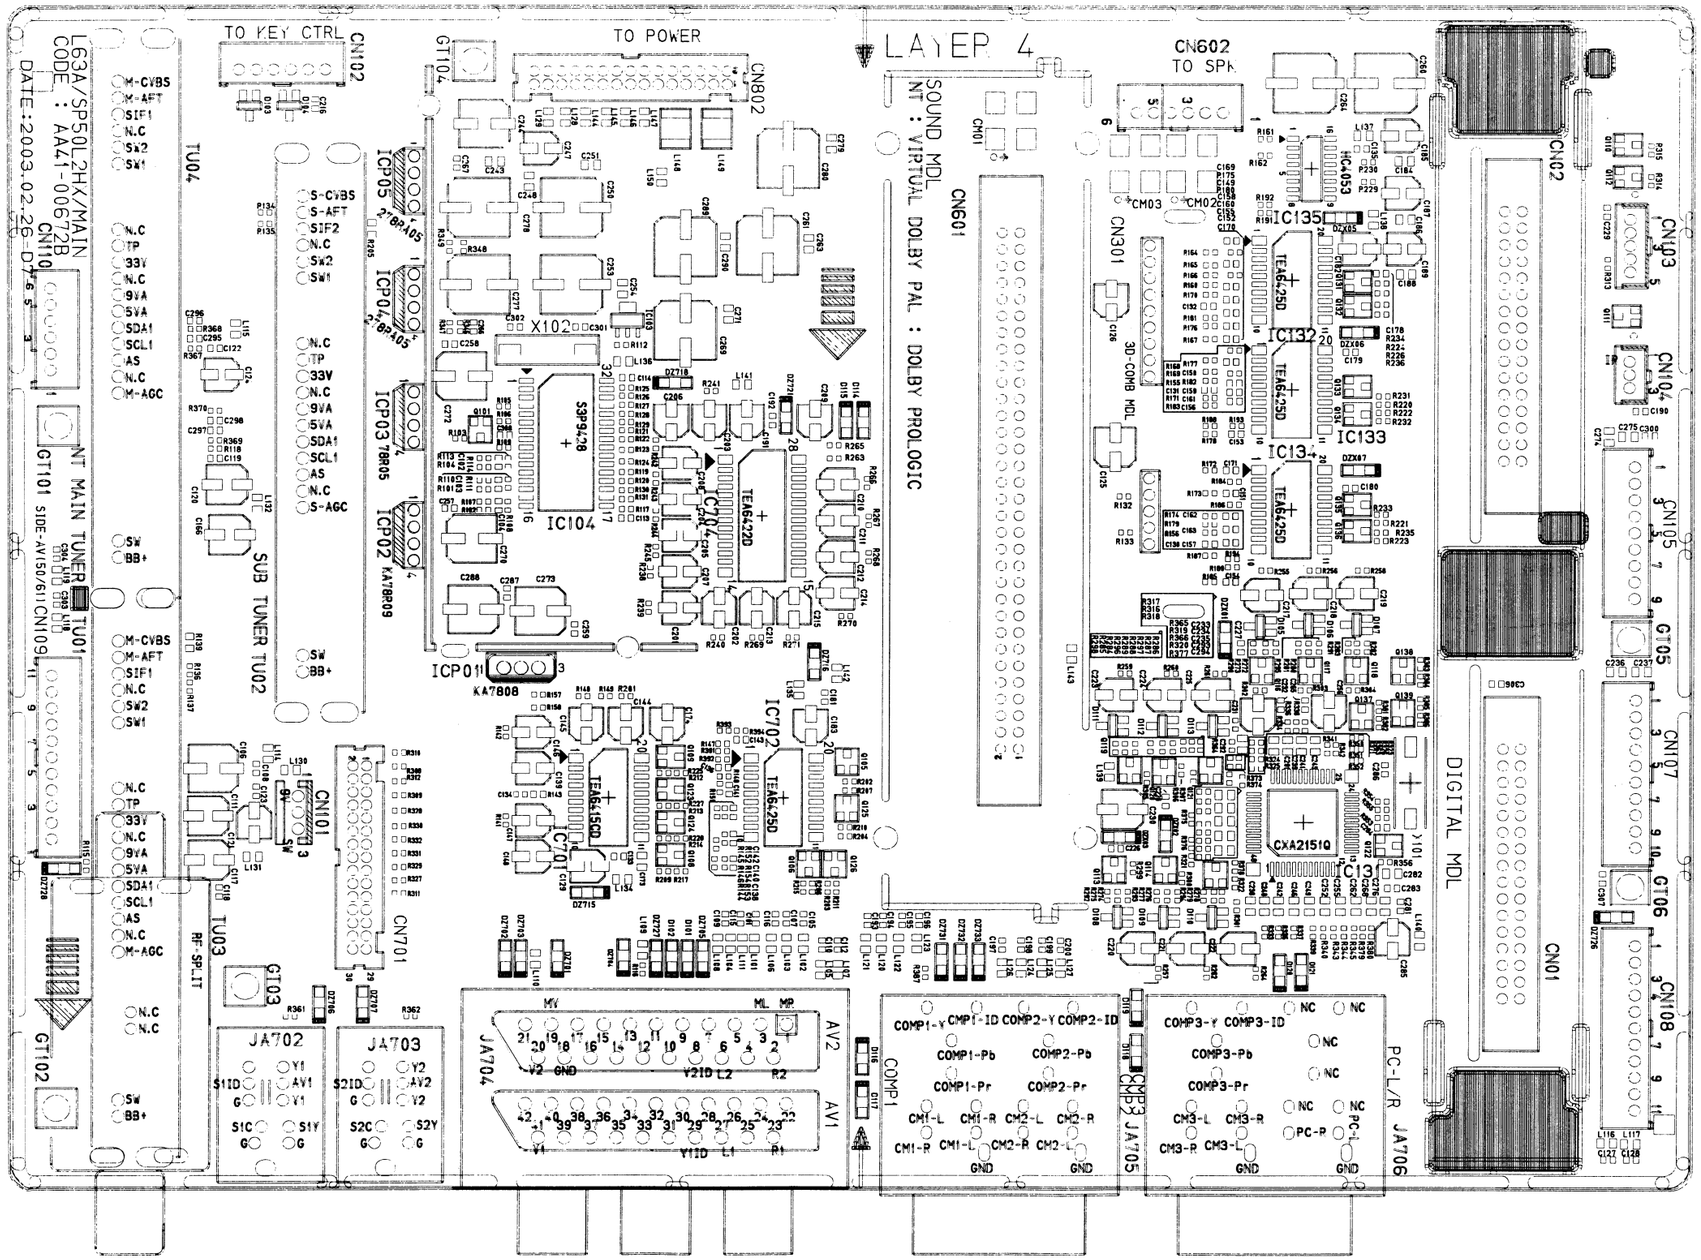

LOC	X	y
IC104	66.5	81.75
IC131	124.25	188.75
IC132	41.5	187
IC133	58.25	187
IC134	76.5	187
IC135	24.5	189.75
IC701	120.5	88
IC702	120.5	113.5
IC704	76.25	110.25

4-2 AUDIO

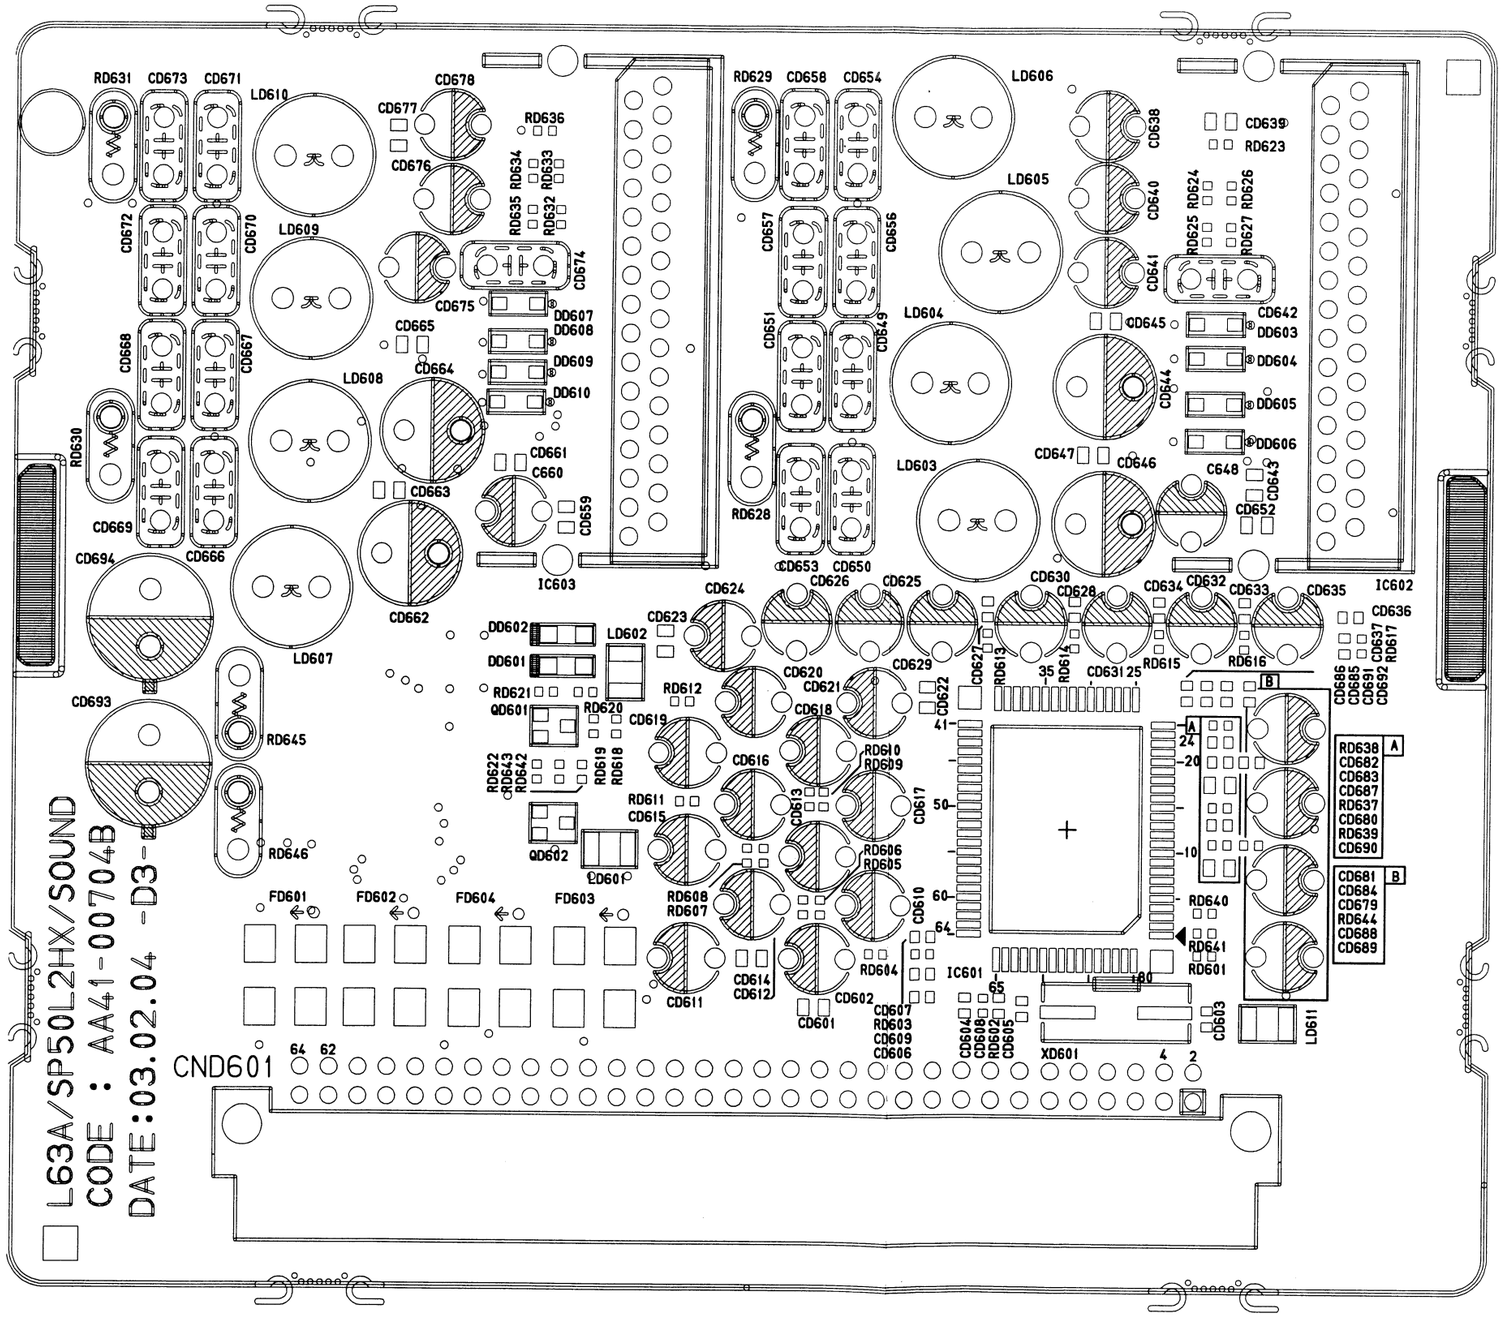

LOC	X	Y
IC601	93	40.25
IC602	109.25	65.5
IC603	47.9	65.5
FD601	24.25	27
FD602	33	27
FD603	51.5	27
FD604	42.25	27
QD601	47.75	49
QD602	47.75	40.5
XD601	97.5	24.25

4-3 DIGITAL(TOP)

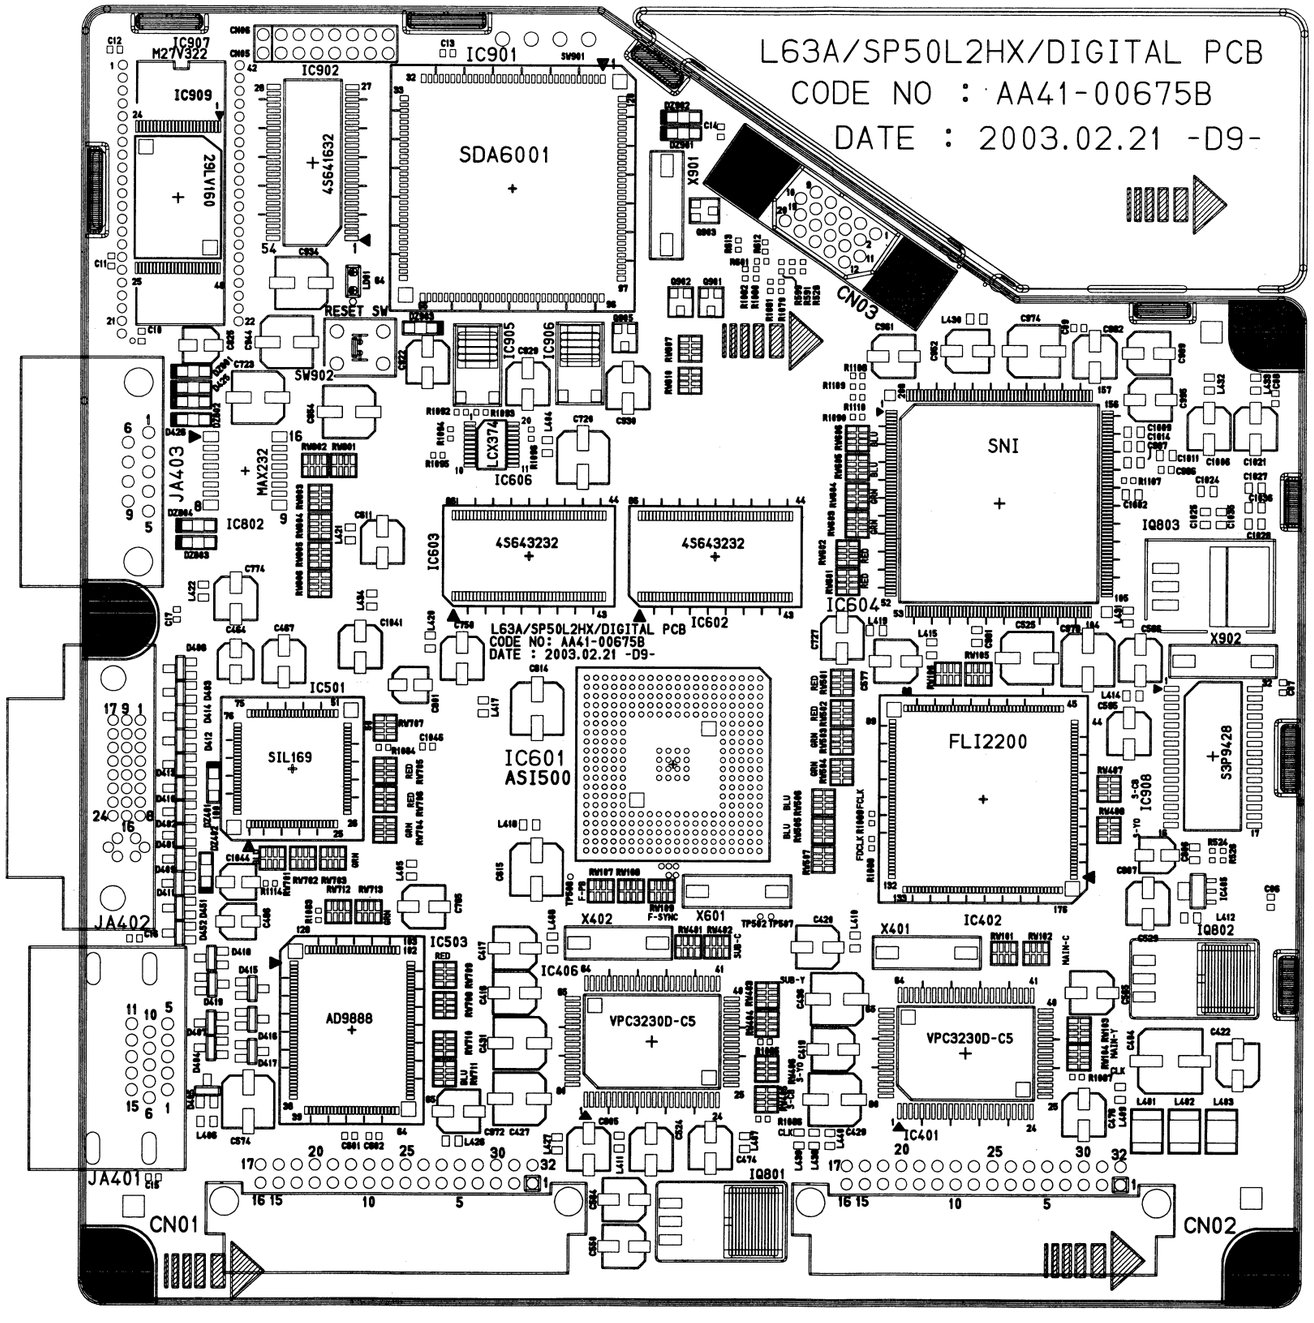

Loc	X	Y
IC401	123.5	34.75
IC402	125.7	70.25
IC403	127	55.5
IC404	145	52.25
IC406	79.75	36.25
IC407	80.75	42.5
IC501	29.25	74.25
IC502	22.75	55
IC503	37.75	37.75
IC504	22	29
IC505	33.5	28.25
IC601	82.5	75
IC602	88.25	104
IC603	62.25	104
IC604	127.75	111.5
IC606	57	119.5
IC801	37	108.75
IC802	22.5	115.75
IC803	123	117.75
IC804	111	117.75
IC901	59.75	155.25
IC902	31.75	158.75
IC903	52.75	127.25
IC907	5.25	172.25
IC908	157.75	76.25
IC909	13	153.9

4-4 DIGITAL(BOTTOM)

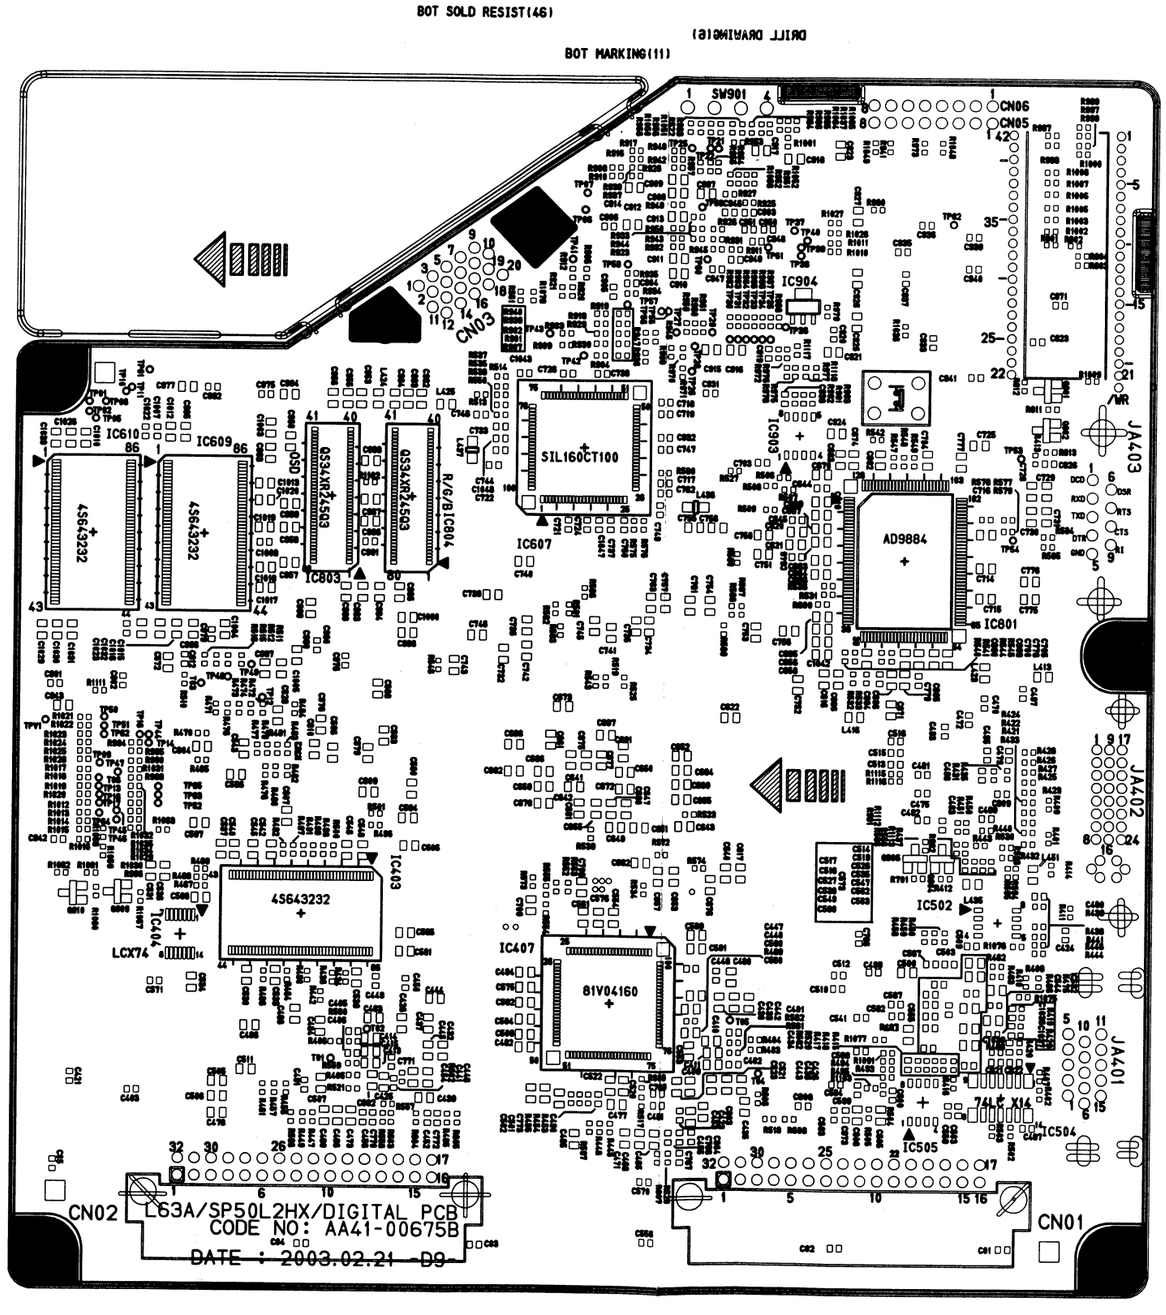

4-5 LCD(TOP)

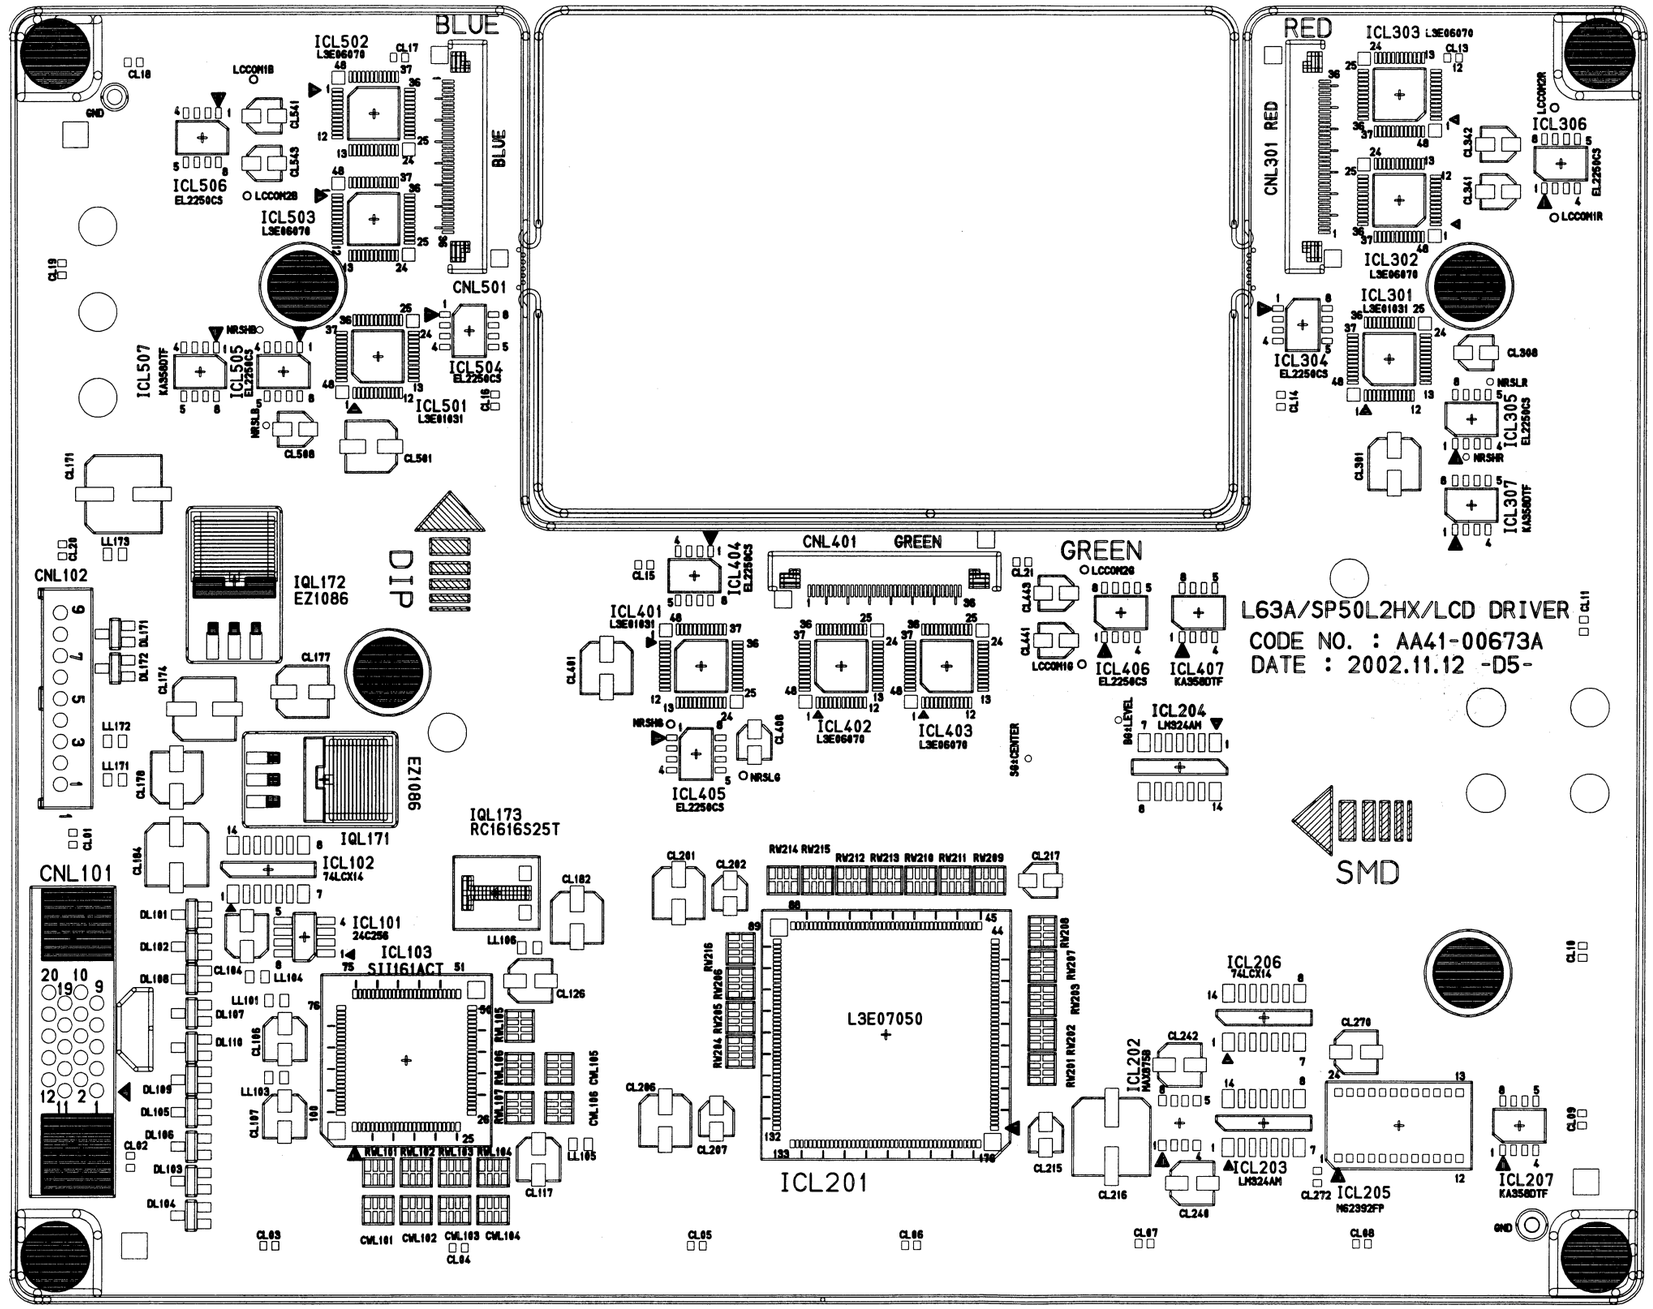

Loc	x	Y
ICL101	34.25	42.125
ICL102	30	50
ICL103	46.25	27.75
ICL201	102.25	30.75
ICL202	136.5	20.5
ICL203	146.25	20.5
ICL204	136.375	62
ICL205	162	20.25
ICL206	146.25	32.75
ICL207	176	20.25
ICL301	160.625	109.5
ICL302	161.75	128
ICL303	161.75	140.25
ICL304	150.5	113.5
ICL305	170.25	102.5
ICL306	180.5	132.25
ICL307	170.25	92.5
ICL401	80.565	73.75
ICL402	96.94	73.75
ICL403	109.19	73.75
ICL404	79.75	84.25
ICL405	80	63.5
ICL406	129.5	80
ICL407	138.5	80
ICL501	42.75	109.75
ICL502	42.25	138.029
ICL503	42.25	125.779
ICL504	53.6	112.75
ICL505	31.75	108
ICL506	22.25	135.25
ICL507	22	108

4-6 LCD(BOTTOM)

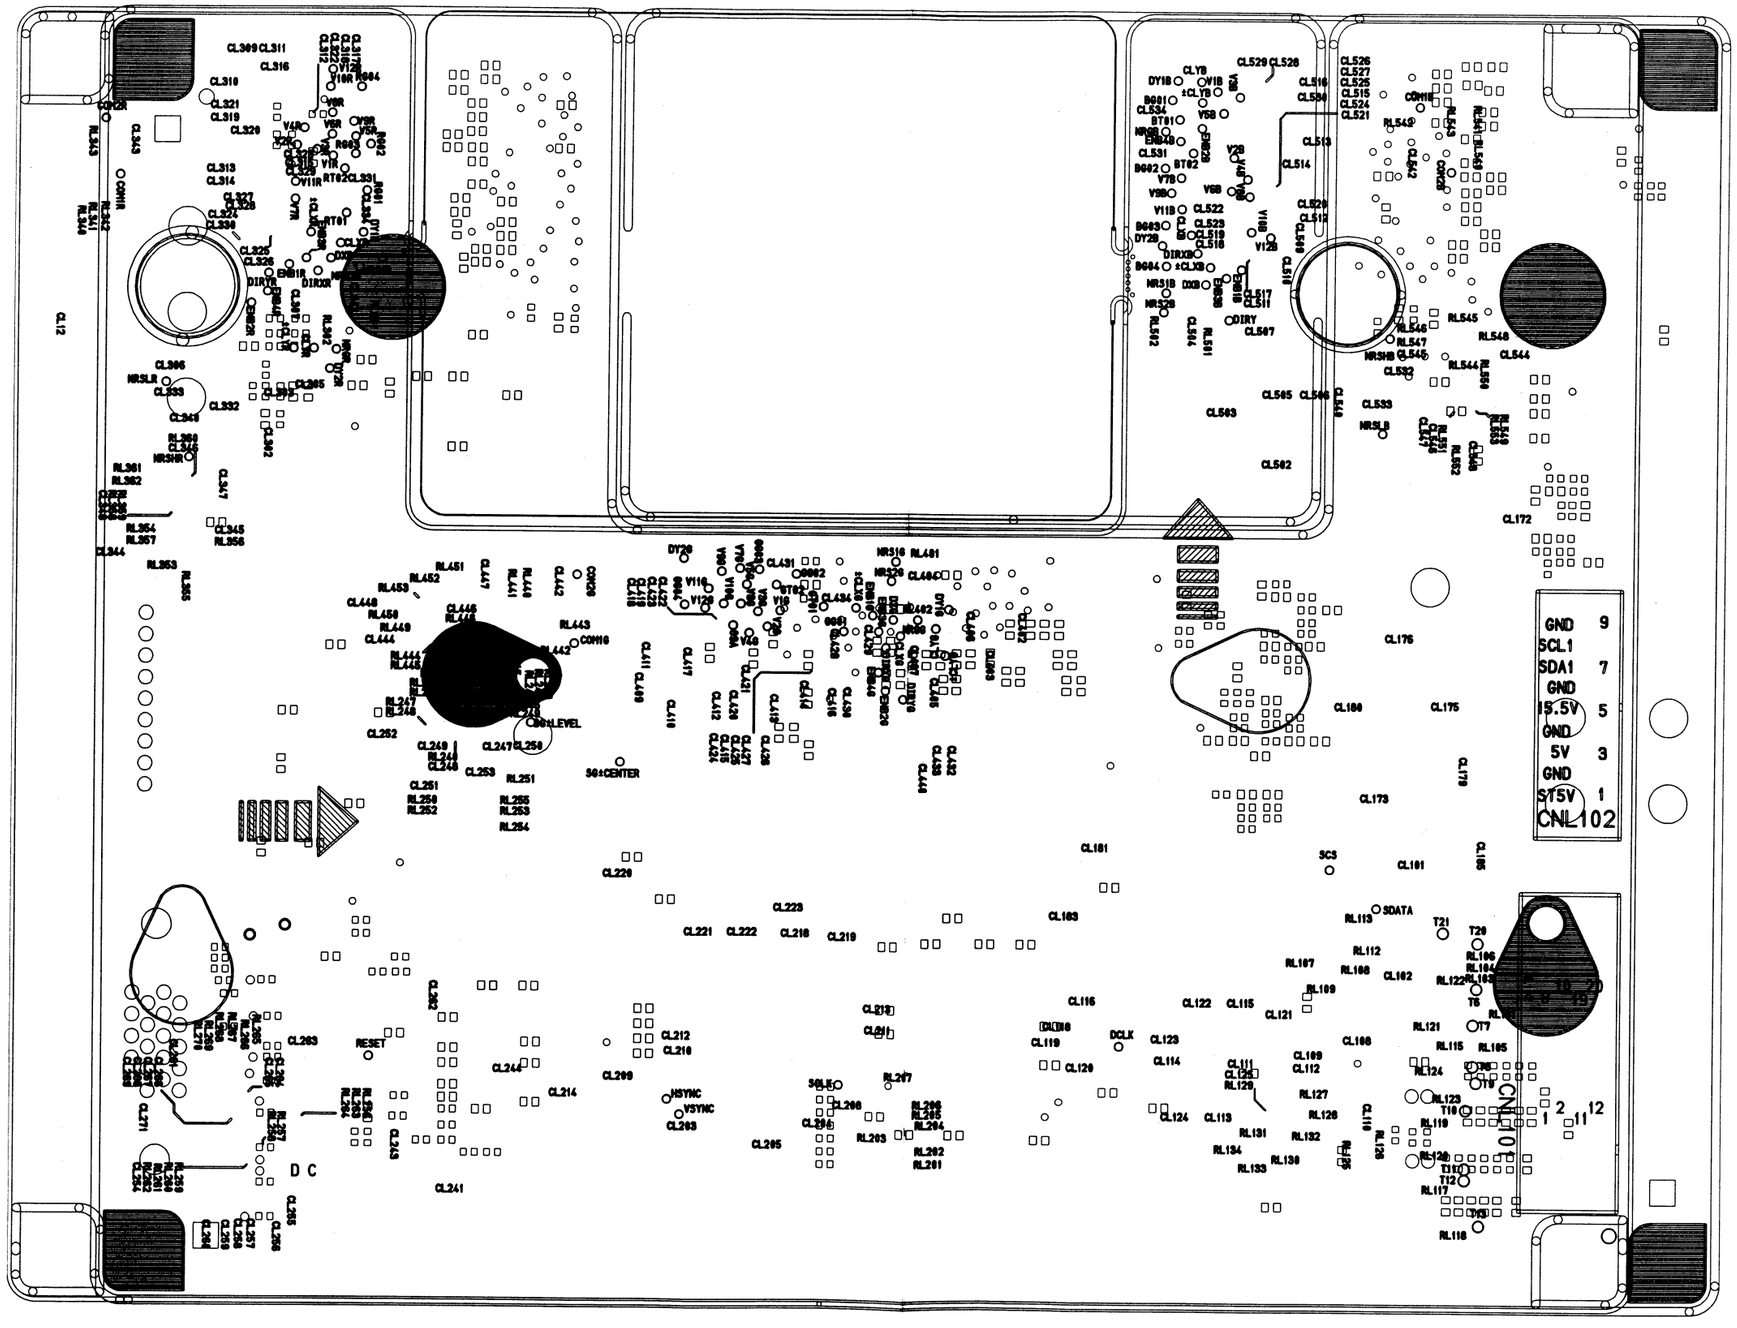

4-7 POWER PCB

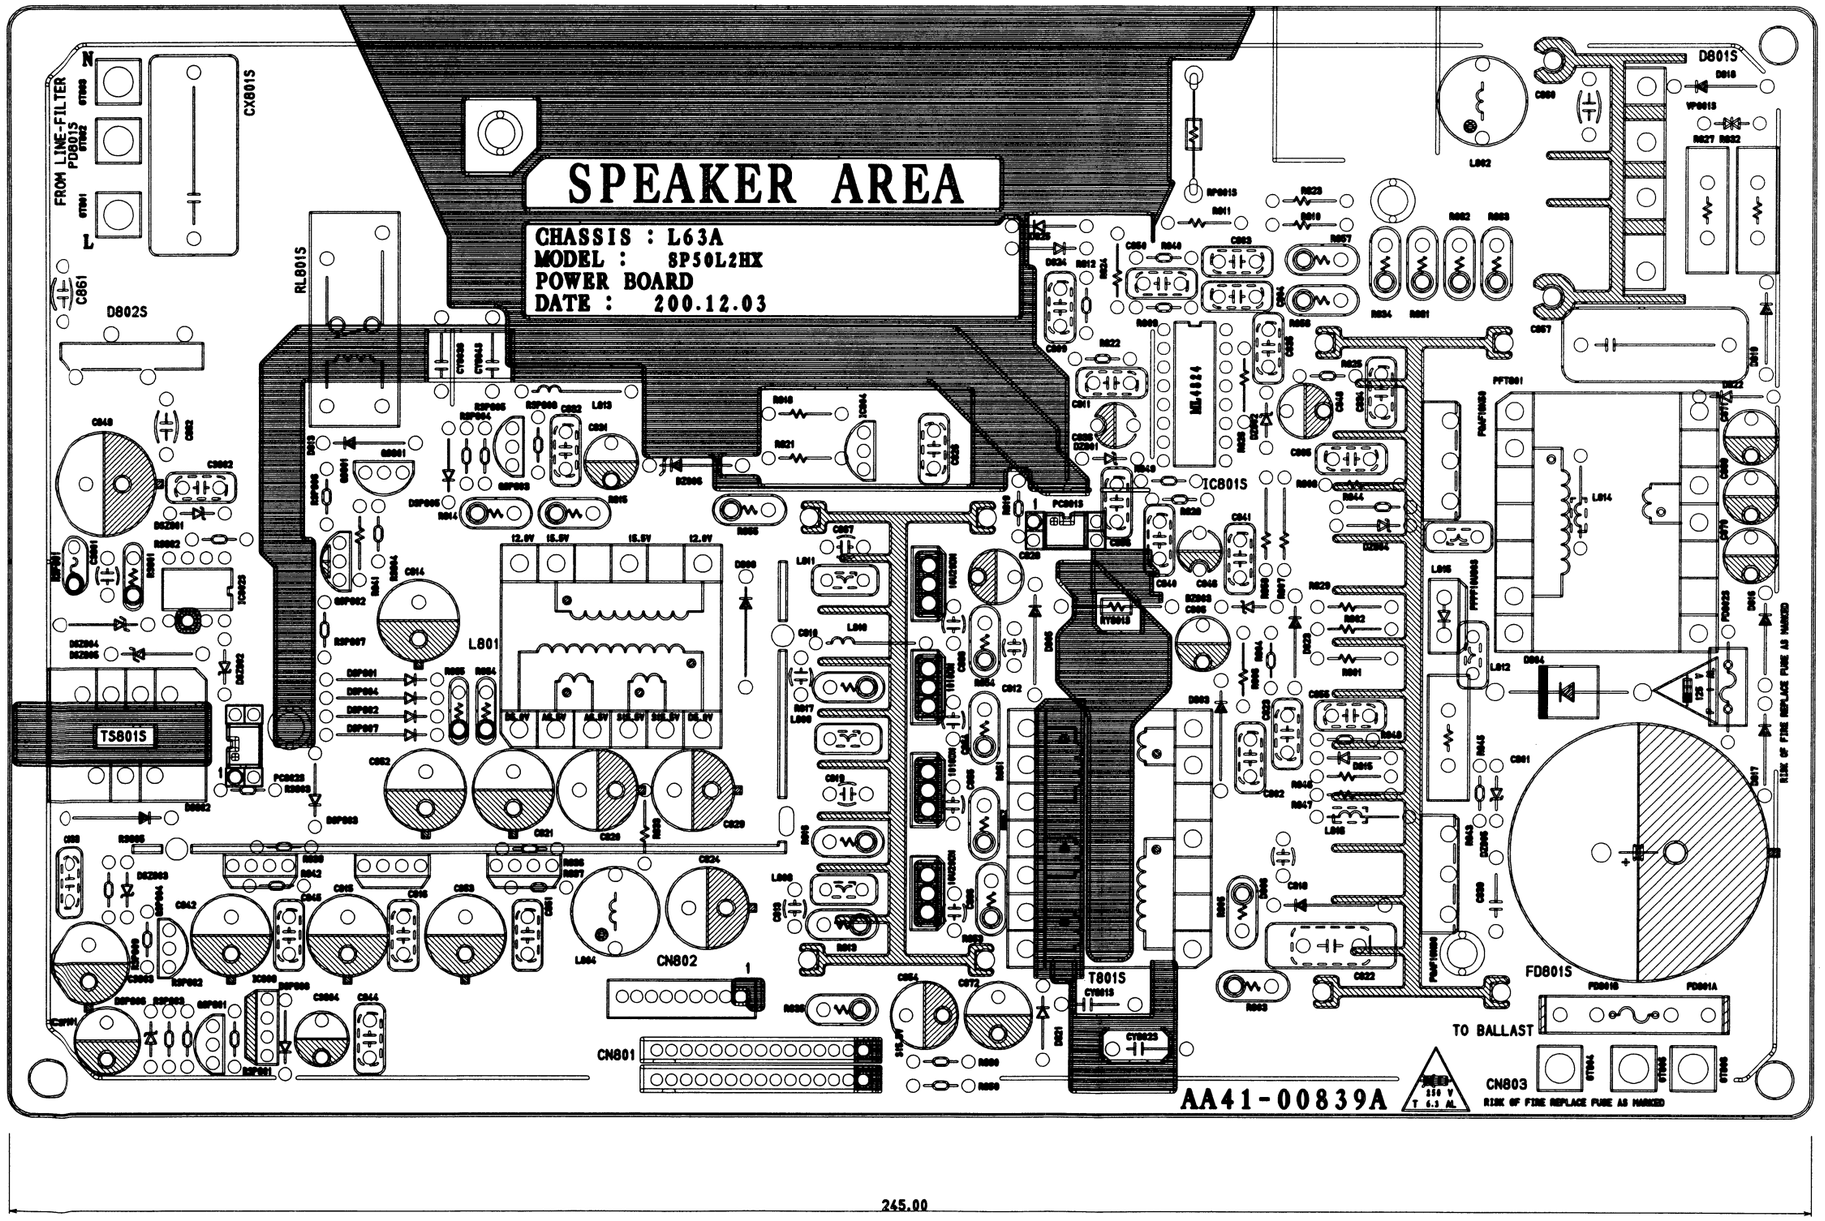

LOC	X	Y
IC801S	157	106.5
IC802S	29.5	75.5
IC804	116.5	87.5
IC808	35.5	8
TS801S	22	57
T801S	161.25	22.5
C801	216.5	35.75
PFT801	204.5	95.5
QS801	53.75	87
RL801S	51	96

5. Schematic Diagrams

5-1 MAIN 1

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

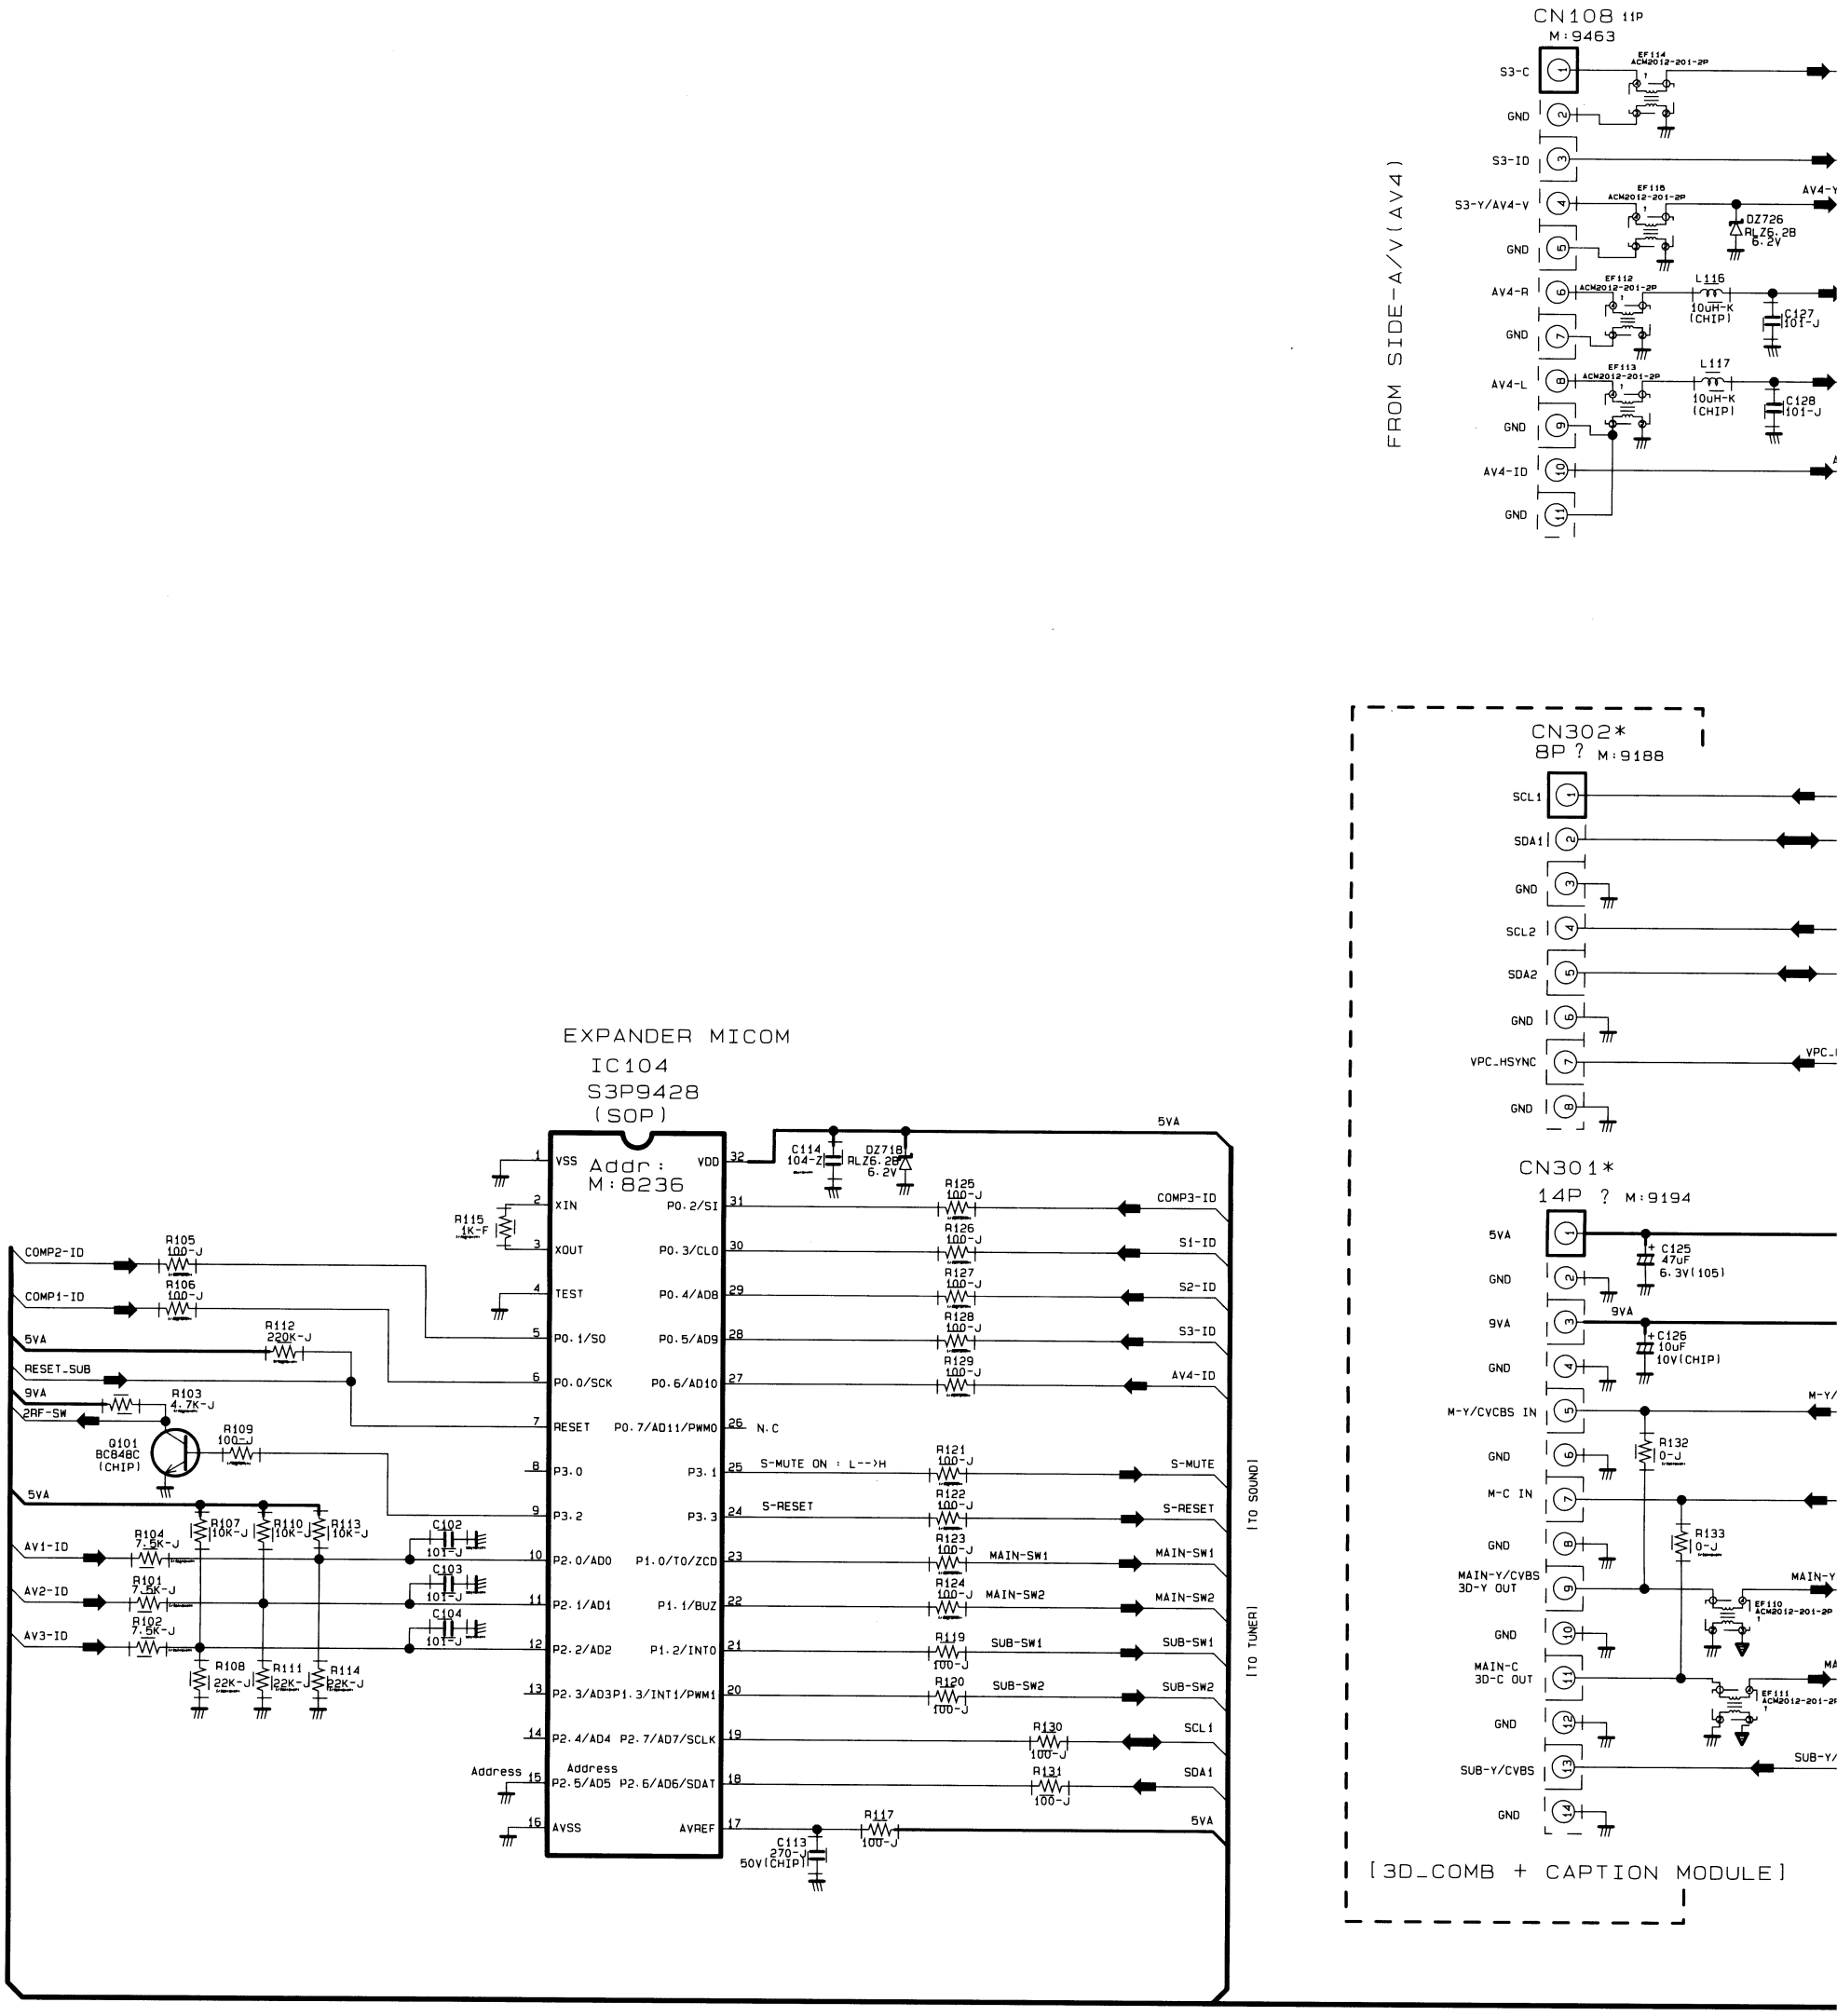

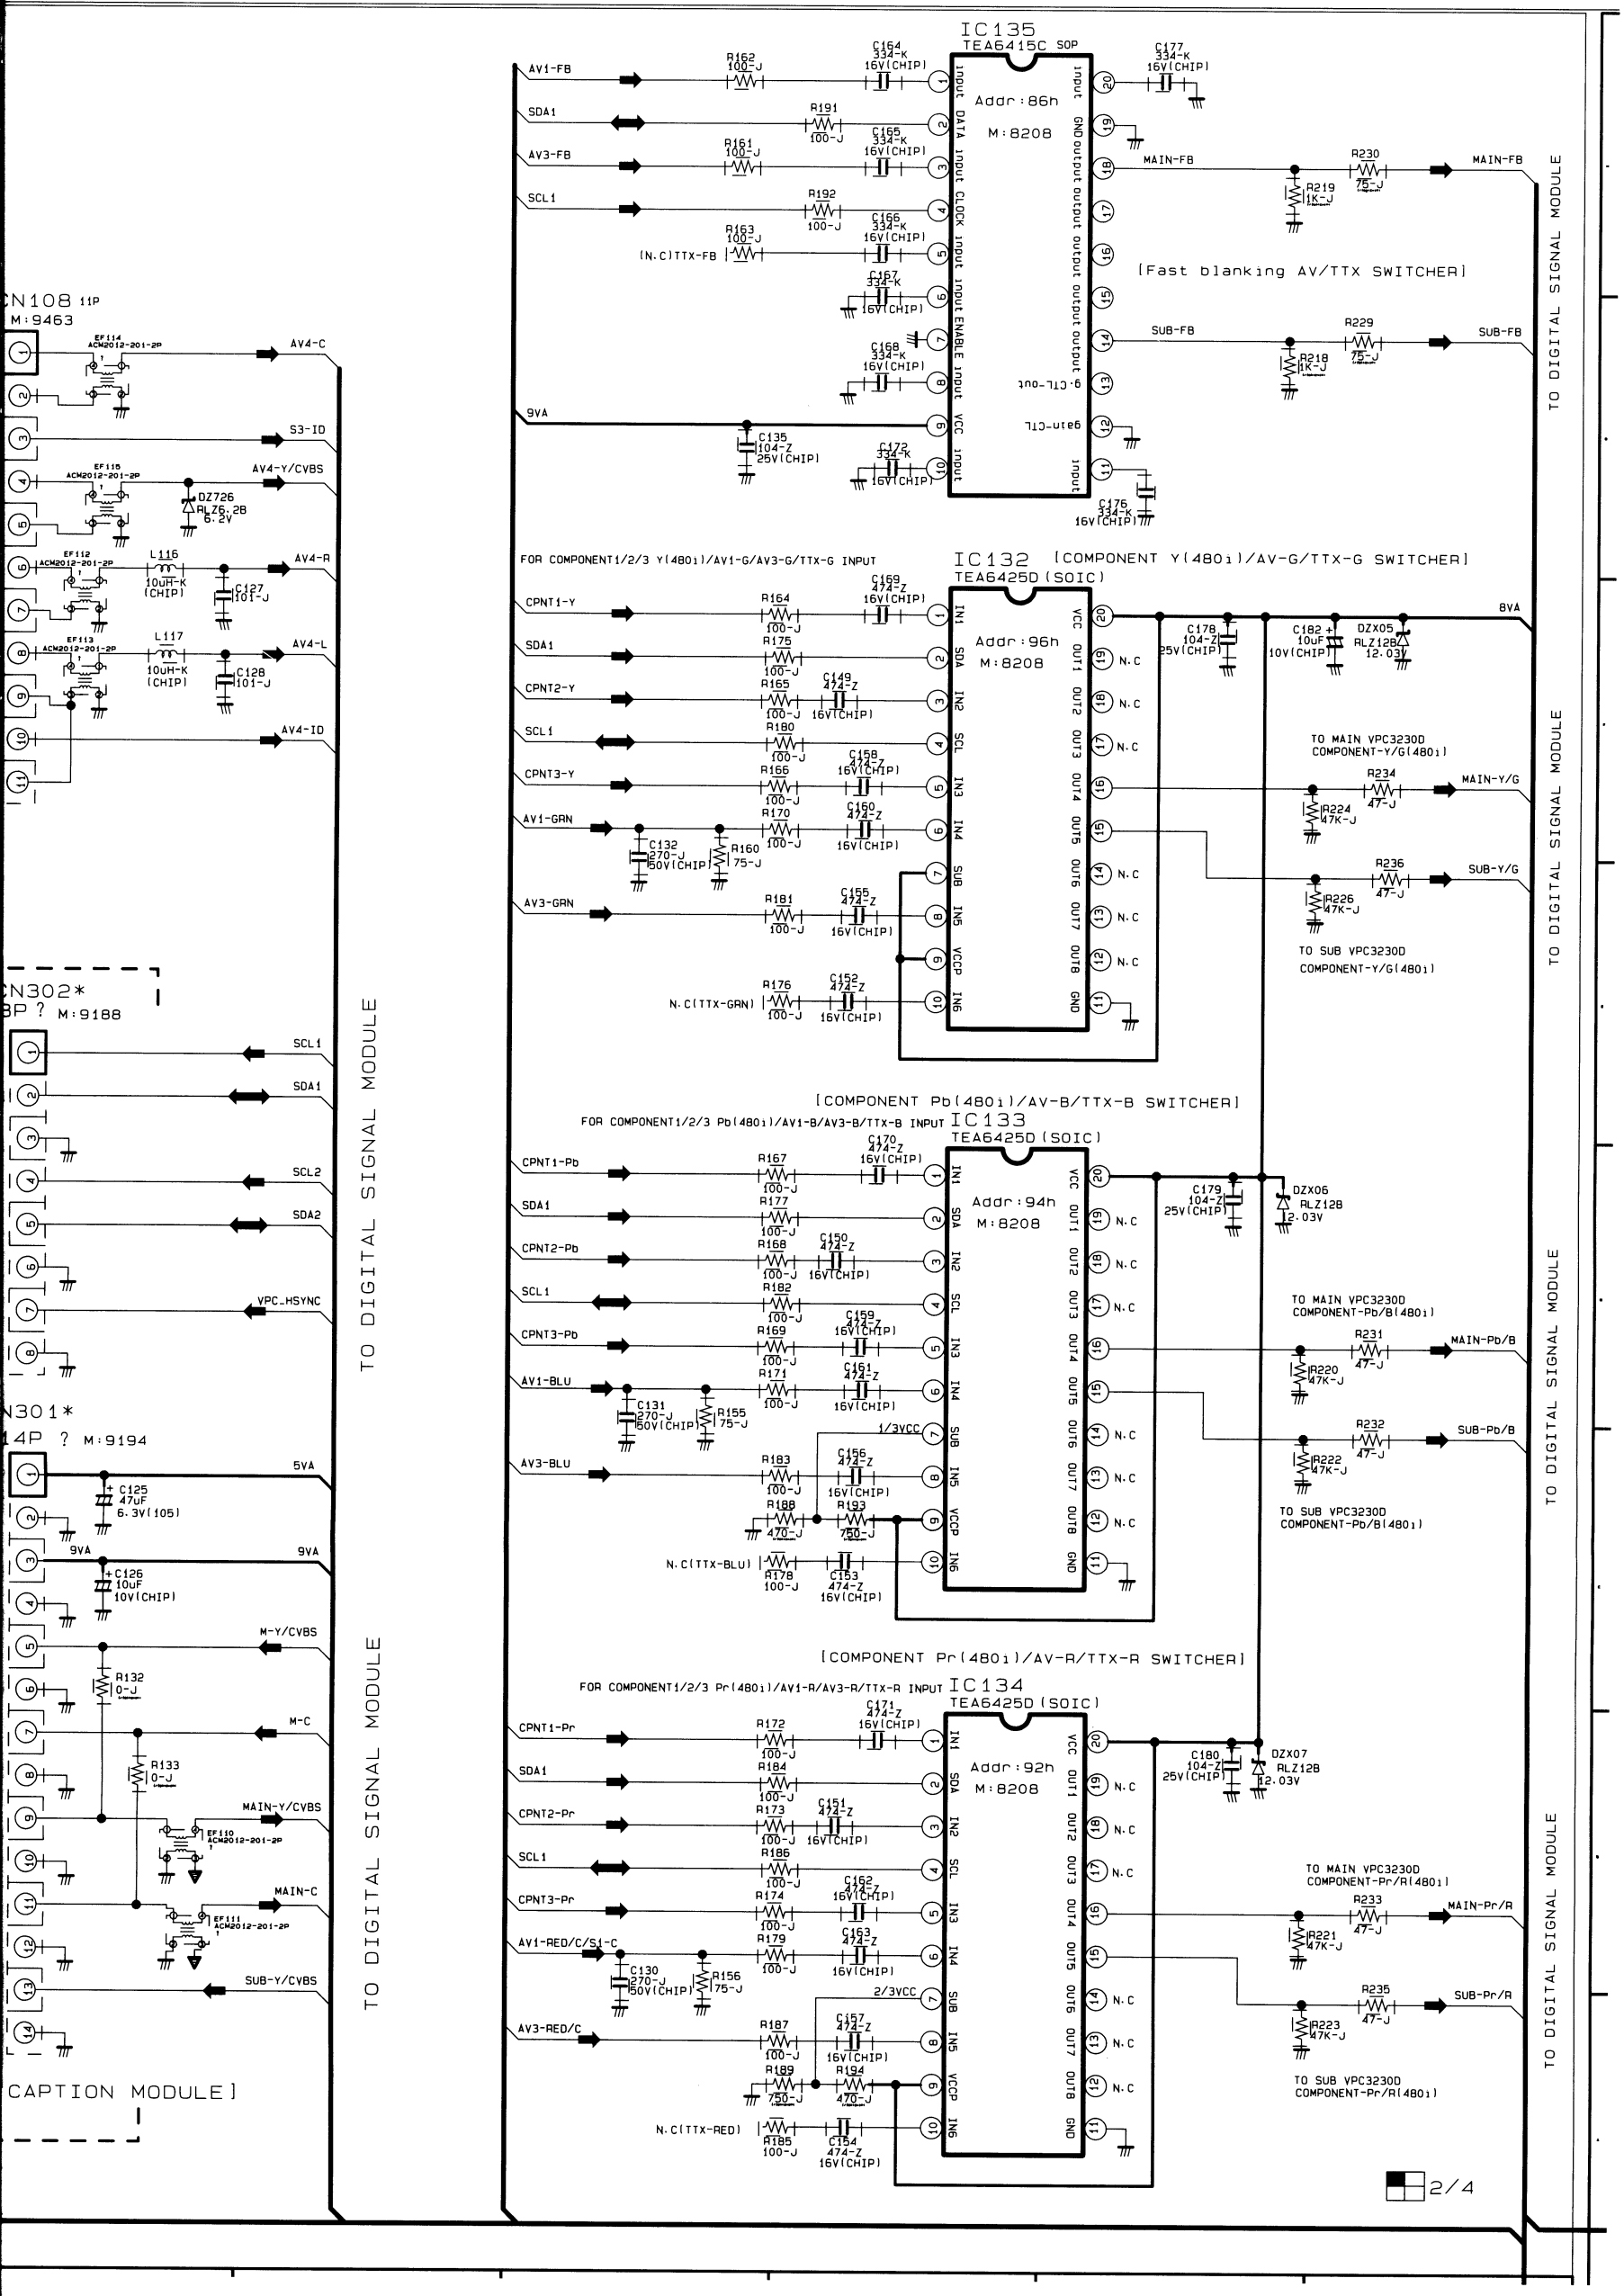
CN108 11P
M:9463
EF114 ACM2012-201-2P
AV4-C
S3-ID
EF115 ACM2012-201-2P
AV4-Y/CVBS
DZ726 RLZ6.2B 6.2V
EF112 ACM2012-201-2P
L116 10uH-K (CHIP)
C127 101-J
AV4-R
EF113 ACM2012-201-2P
L117 10uH-K (CHIP)
C128 101-J
AV4-L
AV4-ID
CN302* 8P ? M:9188
SCL1
SDA1
SCL2
SDA2
VPC_HSYNC
CN301* 14P ? M:9194
5VA
C125 47uF 6.3V(105)
9VA
C126 10uF 10V(CHIP)
M-Y/CVBS
R132 0-J
M-C
R133 0-J
MAIN-Y/CVBS
EF110 ACM2012-201-2P
MAIN-C
EF111 ACM2012-201-2P
SUB-Y/CVBS
CAPTION MODULE]
TO DIGITAL SIGNAL MODULE
IC135 TEA6415C SOP
Addr:86h
M:8208
AV1-FB
SDA1
AV3-FB
SCL1
(N.C)TTX-FB
8VA
R162 100-J
R191 100-J
R161 100-J
R192 100-J
R163 100-J
C164 334-K 16V(CHIP)
C165 334-K 16V(CHIP)
C166 334-K 16V(CHIP)
C167 334-K 16V(CHIP)
C168 334-K 16V(CHIP)
C135 104-Z 25V(CHIP)
C172 334-K 16V(CHIP)
C177 334-K 16V(CHIP)
C176 334-K 16V(CHIP)
MAIN-FB
SUB-FB
R219 1K-J
R218 1K-J
R230 75-J
R229 75-J
[Fast blanking AV/TTX SWITCHER]
FOR COMPONENT1/2/3 Y(480i)/AV1-G/AV3-G/TTX-G INPUT
IC132 [COMPONENT Y(480i)/AV-G/TTX-G SWITCHER]
TEA6425D(SOIC)
Addr:96h
M:8208
CPNT1-Y
SDA1
CPNT2-Y
SCL1
CPNT3-Y
AV1-GRN
AV3-GRN
N.C(TTX-GRN)
R164 100-J
R175 100-J
R165 100-J
R180 100-J
R166 100-J
R170 100-J
R181 100-J
R176 100-J
C169 474-Z 16V(CHIP)
C149 474-Z 16V(CHIP)
C158 474-Z 16V(CHIP)
C160 474-Z 16V(CHIP)
C155 474-Z 16V(CHIP)
C152 474-Z 16V(CHIP)
C132 270-J 50V(CHIP)
R160 75-J
C178 104-Z 25V(CHIP)
C182 10uF 10V(CHIP)
DZX05 RLZ12B 12.03V
8VA
TO MAIN VPC3230D COMPONENT-Y/G(480i)
R234 47-J
R224 47K-J
MAIN-Y/G
R236 47-J
R226 47K-J
SUB-Y/G
TO SUB VPC3230D COMPONENT-Y/G(480i)
[COMPONENT Pb(480i)/AV-B/TTX-B SWITCHER]
FOR COMPONENT1/2/3 Pb(480i)/AV1-B/AV3-B/TTX-B INPUT
IC133
TEA6425D(SOIC)
Addr:94h
M:8208
CPNT1-Pb
SDA1
CPNT2-Pb
SCL1
CPNT3-Pb
AV1-BLU
AV3-BLU
N.C(TTX-BLU)
1/3VCC
R167 100-J
R177 100-J
R168 100-J
R182 100-J
R169 100-J
R171 100-J
R183 100-J
R188 470-J
R193 750-J
R178 100-J
C170 474-Z 16V(CHIP)
C150 474-Z 16V(CHIP)
C159 474-Z 16V(CHIP)
C161 474-Z 16V(CHIP)
C156 474-Z 16V(CHIP)
C153 474-Z 16V(CHIP)
C131 270-J 50V(CHIP)
R155 75-J
C179 104-Z 25V(CHIP)
DZX06 RLZ12B 12.03V
TO MAIN VPC3230D COMPONENT-Pb/B(480i)
R231 47-J
R220 47K-J
MAIN-Pb/B
R232 47-J
R222 47K-J
SUB-Pb/B
TO SUB VPC3230D COMPONENT-Pb/B(480i)
[COMPONENT Pr(480i)/AV-R/TTX-R SWITCHER]
FOR COMPONENT1/2/3 Pr(480i)/AV1-R/AV3-R/TTX-R INPUT
IC134
TEA6425D(SOIC)
Addr:92h
M:8208
CPNT1-Pr
SDA1
CPNT2-Pr
SCL1
CPNT3-Pr
AV1-RED/C/S1-C
AV3-RED/C
N.C(TTX-RED)
2/3VCC
R172 100-J
R184 100-J
R173 100-J
R186 100-J
R174 100-J
R179 100-J
R187 100-J
R189 750-J
R194 470-J
R185 100-J
C171 474-Z 16V(CHIP)
C151 474-Z 16V(CHIP)
C162 474-Z 16V(CHIP)
C163 474-Z 16V(CHIP)
C130 270-J 50V(CHIP)
R156 75-J
C157 474-Z 16V(CHIP)
C154 474-Z 16V(CHIP)
C180 104-Z 25V(CHIP)
DZX07 RLZ12B 12.03V
TO MAIN VPC3230D COMPONENT-Pr/R(480i)
R233 47-J
R221 47K-J
MAIN-Pr/R
R235 47-J
R223 47K-J
SUB-Pr/R
TO SUB VPC3230D COMPONENT-Pr/R(480i)
TO DIGITAL SIGNAL MODULE
2/4

5-2 MAIN 2

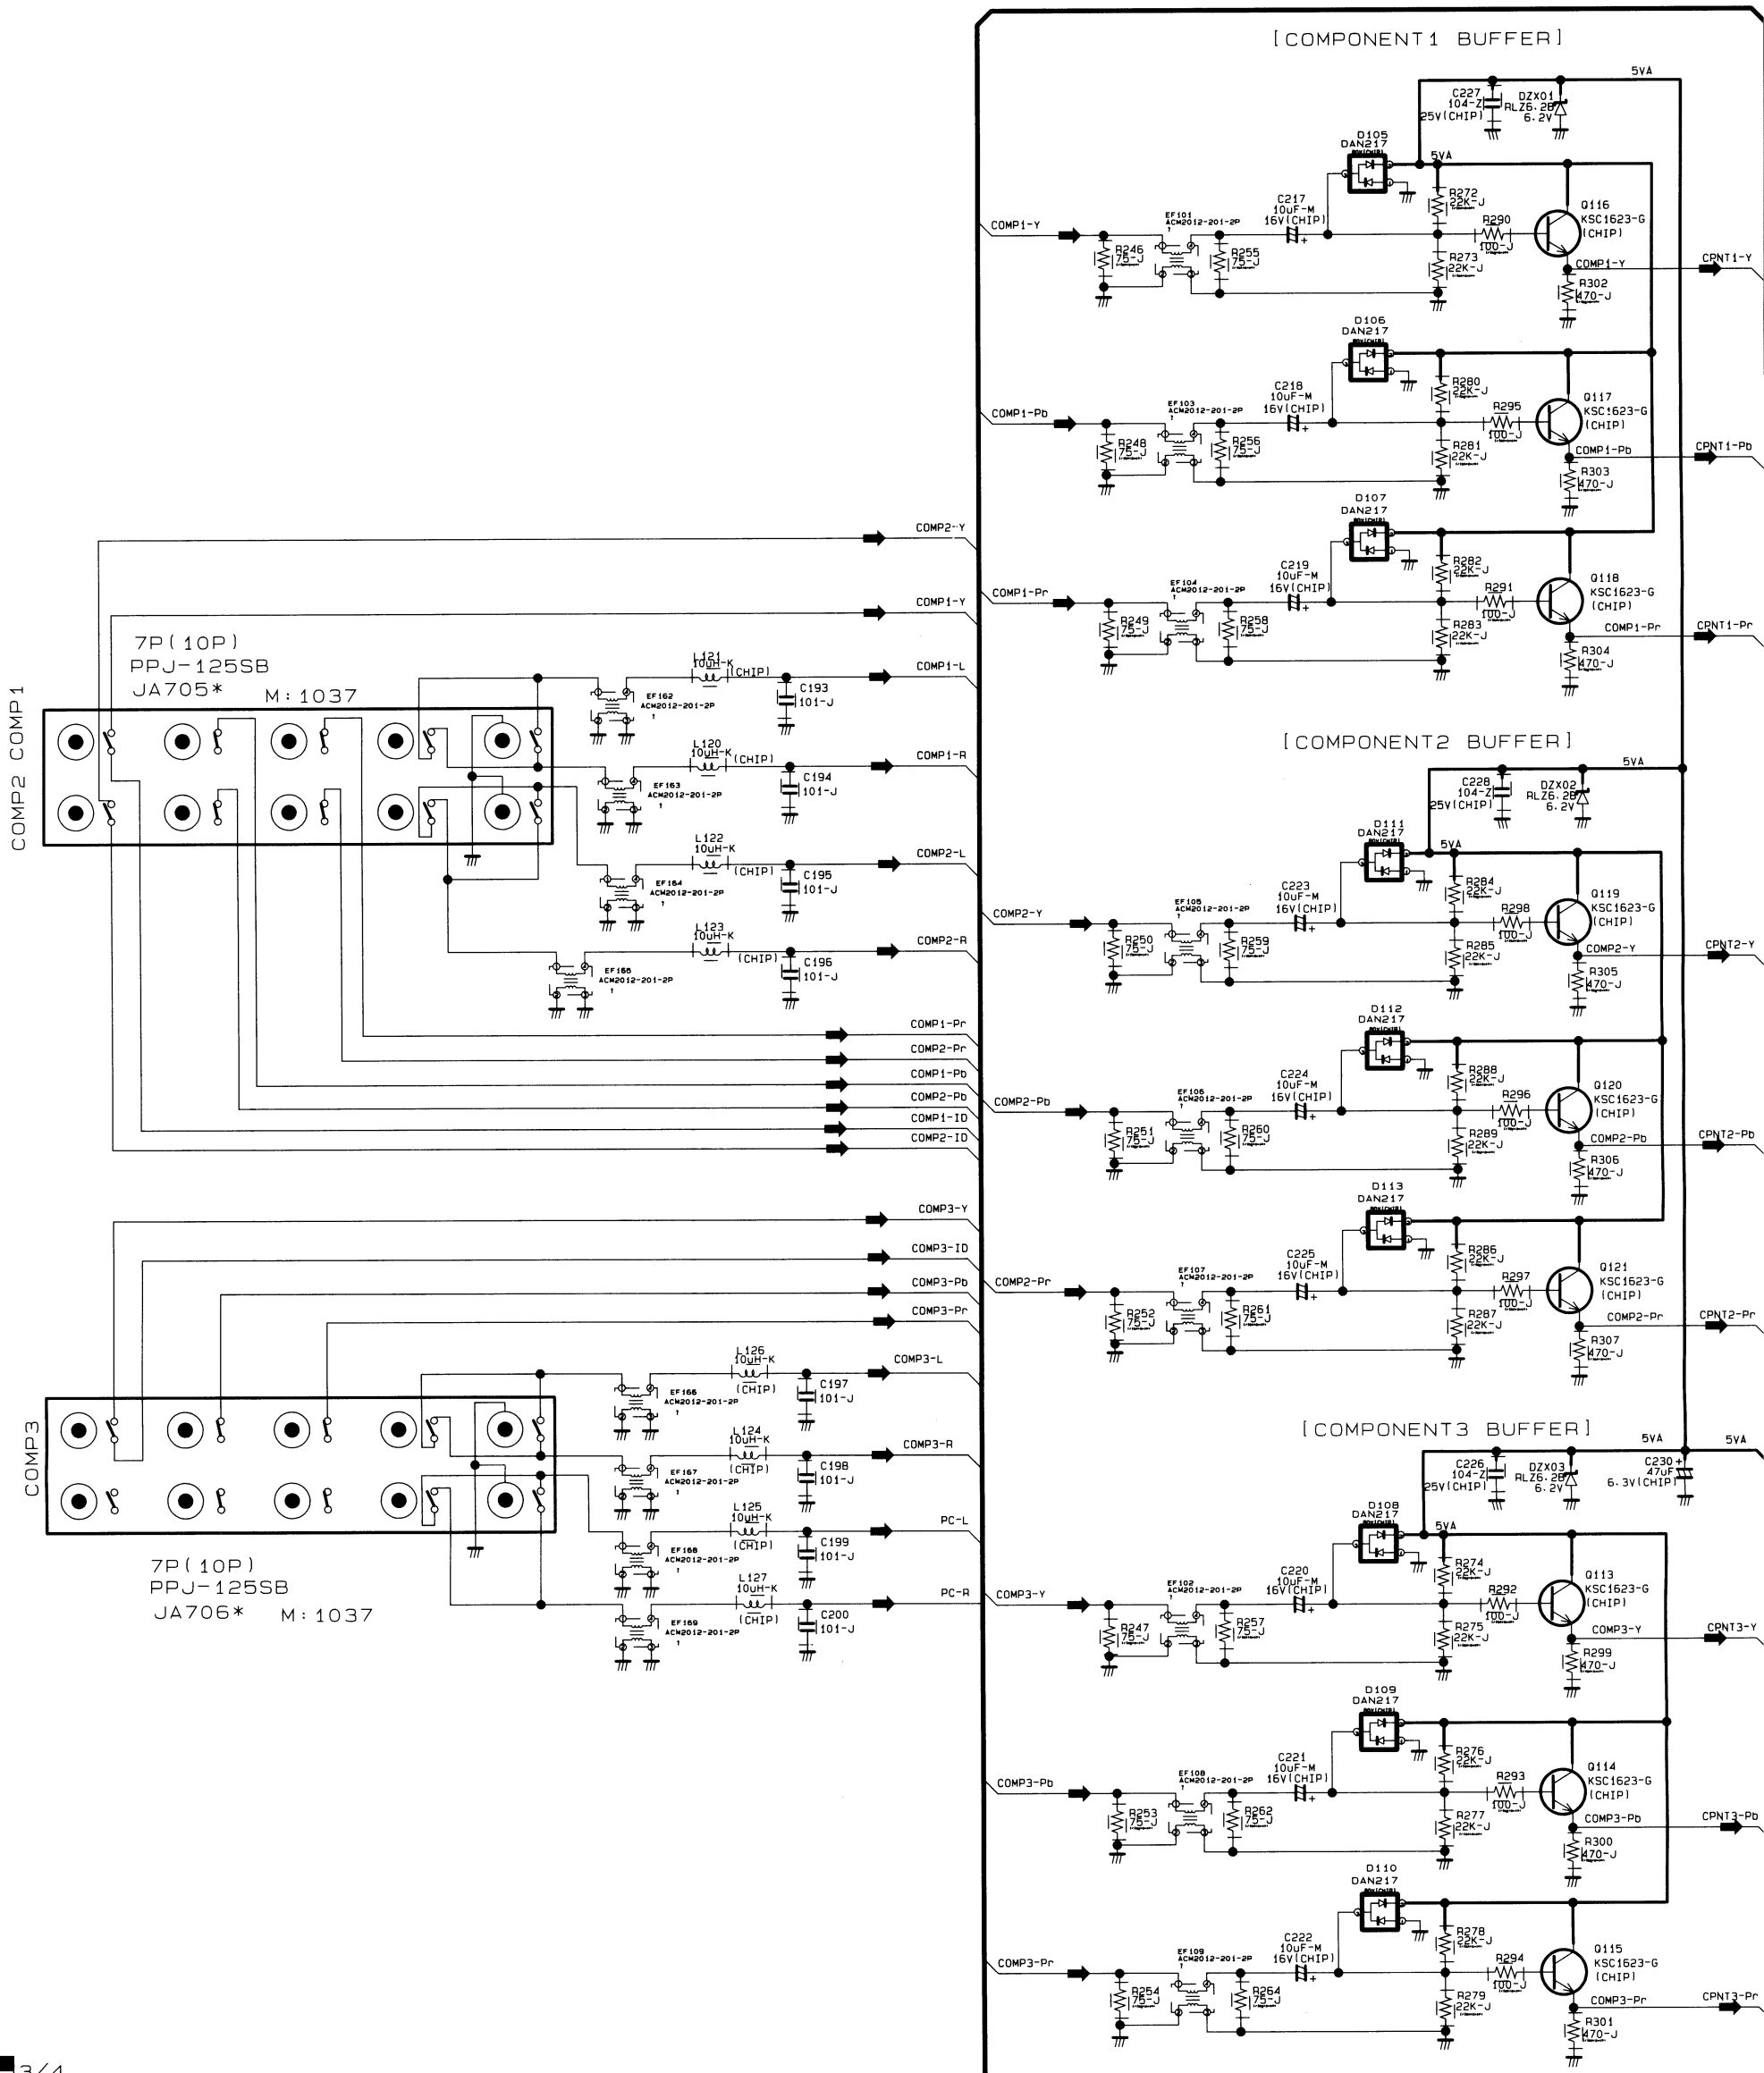
[COMPONENT1 BUFFER]
[COMPONENT2 BUFFER]
[COMPONENT3 BUFFER]
5VA
COMP1-Y
COMP1-Pb
COMP1-Pr
COMP2-Y
COMP2-Pb
COMP2-Pr
COMP3-Y
COMP3-Pb
COMP3-Pr
CPNT1-Y
CPNT1-Pb
CPNT1-Pr
CPNT2-Y
CPNT2-Pb
CPNT2-Pr
CPNT3-Y
CPNT3-Pb
CPNT3-Pr
D105 DAN217
D106 DAN217
D107 DAN217
D111 DAN217
D112 DAN217
D113 DAN217
D108 DAN217
D109 DAN217
D110 DAN217
C227 104-Z 25V(CHIP)
DZX01 RLZ6.2B 6.2V
DZX02 RLZ6.2B 6.2V
DZX03 RLZ6.2B 6.2V
C230 47uF 6.3V(CHIP)
C217 10uF-M 16V(CHIP)
C218 10uF-M 16V(CHIP)
C219 10uF-M 16V(CHIP)
C223 10uF-M 16V(CHIP)
C224 10uF-M 16V(CHIP)
C225 10uF-M 16V(CHIP)
C220 10uF-M 16V(CHIP)
C221 10uF-M 16V(CHIP)
C222 10uF-M 16V(CHIP)
Q116 KSC1623-G (CHIP)
Q117 KSC1623-G (CHIP)
Q118 KSC1623-G (CHIP)
Q119 KSC1623-G (CHIP)
Q120 KSC1623-G (CHIP)
Q121 KSC1623-G (CHIP)
Q113 KSC1623-G (CHIP)
Q114 KSC1623-G (CHIP)
Q115 KSC1623-G (CHIP)
R246 75-J
R247 75-J
R248 75-J
R249 75-J
R250 75-J
R251 75-J
R252 75-J
R253 75-J
R254 75-J
R255 75-J
R256 75-J
R257 75-J
R258 75-J
R259 75-J
R260 75-J
R261 75-J
R262 75-J
R263 75-J
R264 75-J
R272 22K-J
R273 22K-J
R274 22K-J
R275 22K-J
R276 22K-J
R277 22K-J
R278 22K-J
R279 22K-J
R280 22K-J
R281 22K-J
R282 22K-J
R283 22K-J
R284 22K-J
R285 22K-J
R286 22K-J
R287 22K-J
R288 22K-J
R289 22K-J
R290 100-J
R291 100-J
R292 100-J
R293 100-J
R294 100-J
R295 100-J
R296 100-J
R297 100-J
R298 100-J
R299 470-J
R300 470-J
R301 470-J
R302 470-J
R303 470-J
R304 470-J
R305 470-J
R306 470-J
R307 470-J
EF101 ACM2012-201-2P
EF102 ACM2012-201-2P
EF103 ACM2012-201-2P
EF104 ACM2012-201-2P
EF105 ACM2012-201-2P
EF106 ACM2012-201-2P
EF107 ACM2012-201-2P
EF108 ACM2012-201-2P
EF109 ACM2012-201-2P
COMP2 COMP1
7P(10P)
PPJ-125SB
JA705* M:1037
L121 10uH-K (CHIP)
L120 10uH-K (CHIP)
L122 10uH-K (CHIP)
L123 10uH-K (CHIP)
C193 101-J
C194 101-J
C195 101-J
C196 101-J
EF162 ACM2012-201-2P
EF163 ACM2012-201-2P
EF164 ACM2012-201-2P
EF165 ACM2012-201-2P
COMP2-Y
COMP1-Y
COMP1-L
COMP1-R
COMP2-L
COMP2-R
COMP1-Pr
COMP2-Pr
COMP1-Pb
COMP2-Pb
COMP1-ID
COMP2-ID
COMP3
7P(10P)
PPJ-125SB
JA706* M:1037
L126 10uH-K (CHIP)
L124 10uH-K (CHIP)
L125 10uH-K (CHIP)
L127 10uH-K (CHIP)
L128 10uH-K (CHIP)
C197 101-J
C198 101-J
C199 101-J
C200 101-J
EF166 ACM2012-201-2P
EF167 ACM2012-201-2P
EF168 ACM2012-201-2P
EF169 ACM2012-201-2P
COMP3-Y
COMP3-ID
COMP3-Pb
COMP3-Pr
COMP3-L
COMP3-R
PC-L
PC-R
3/4
1
2
3
4
5
6
7

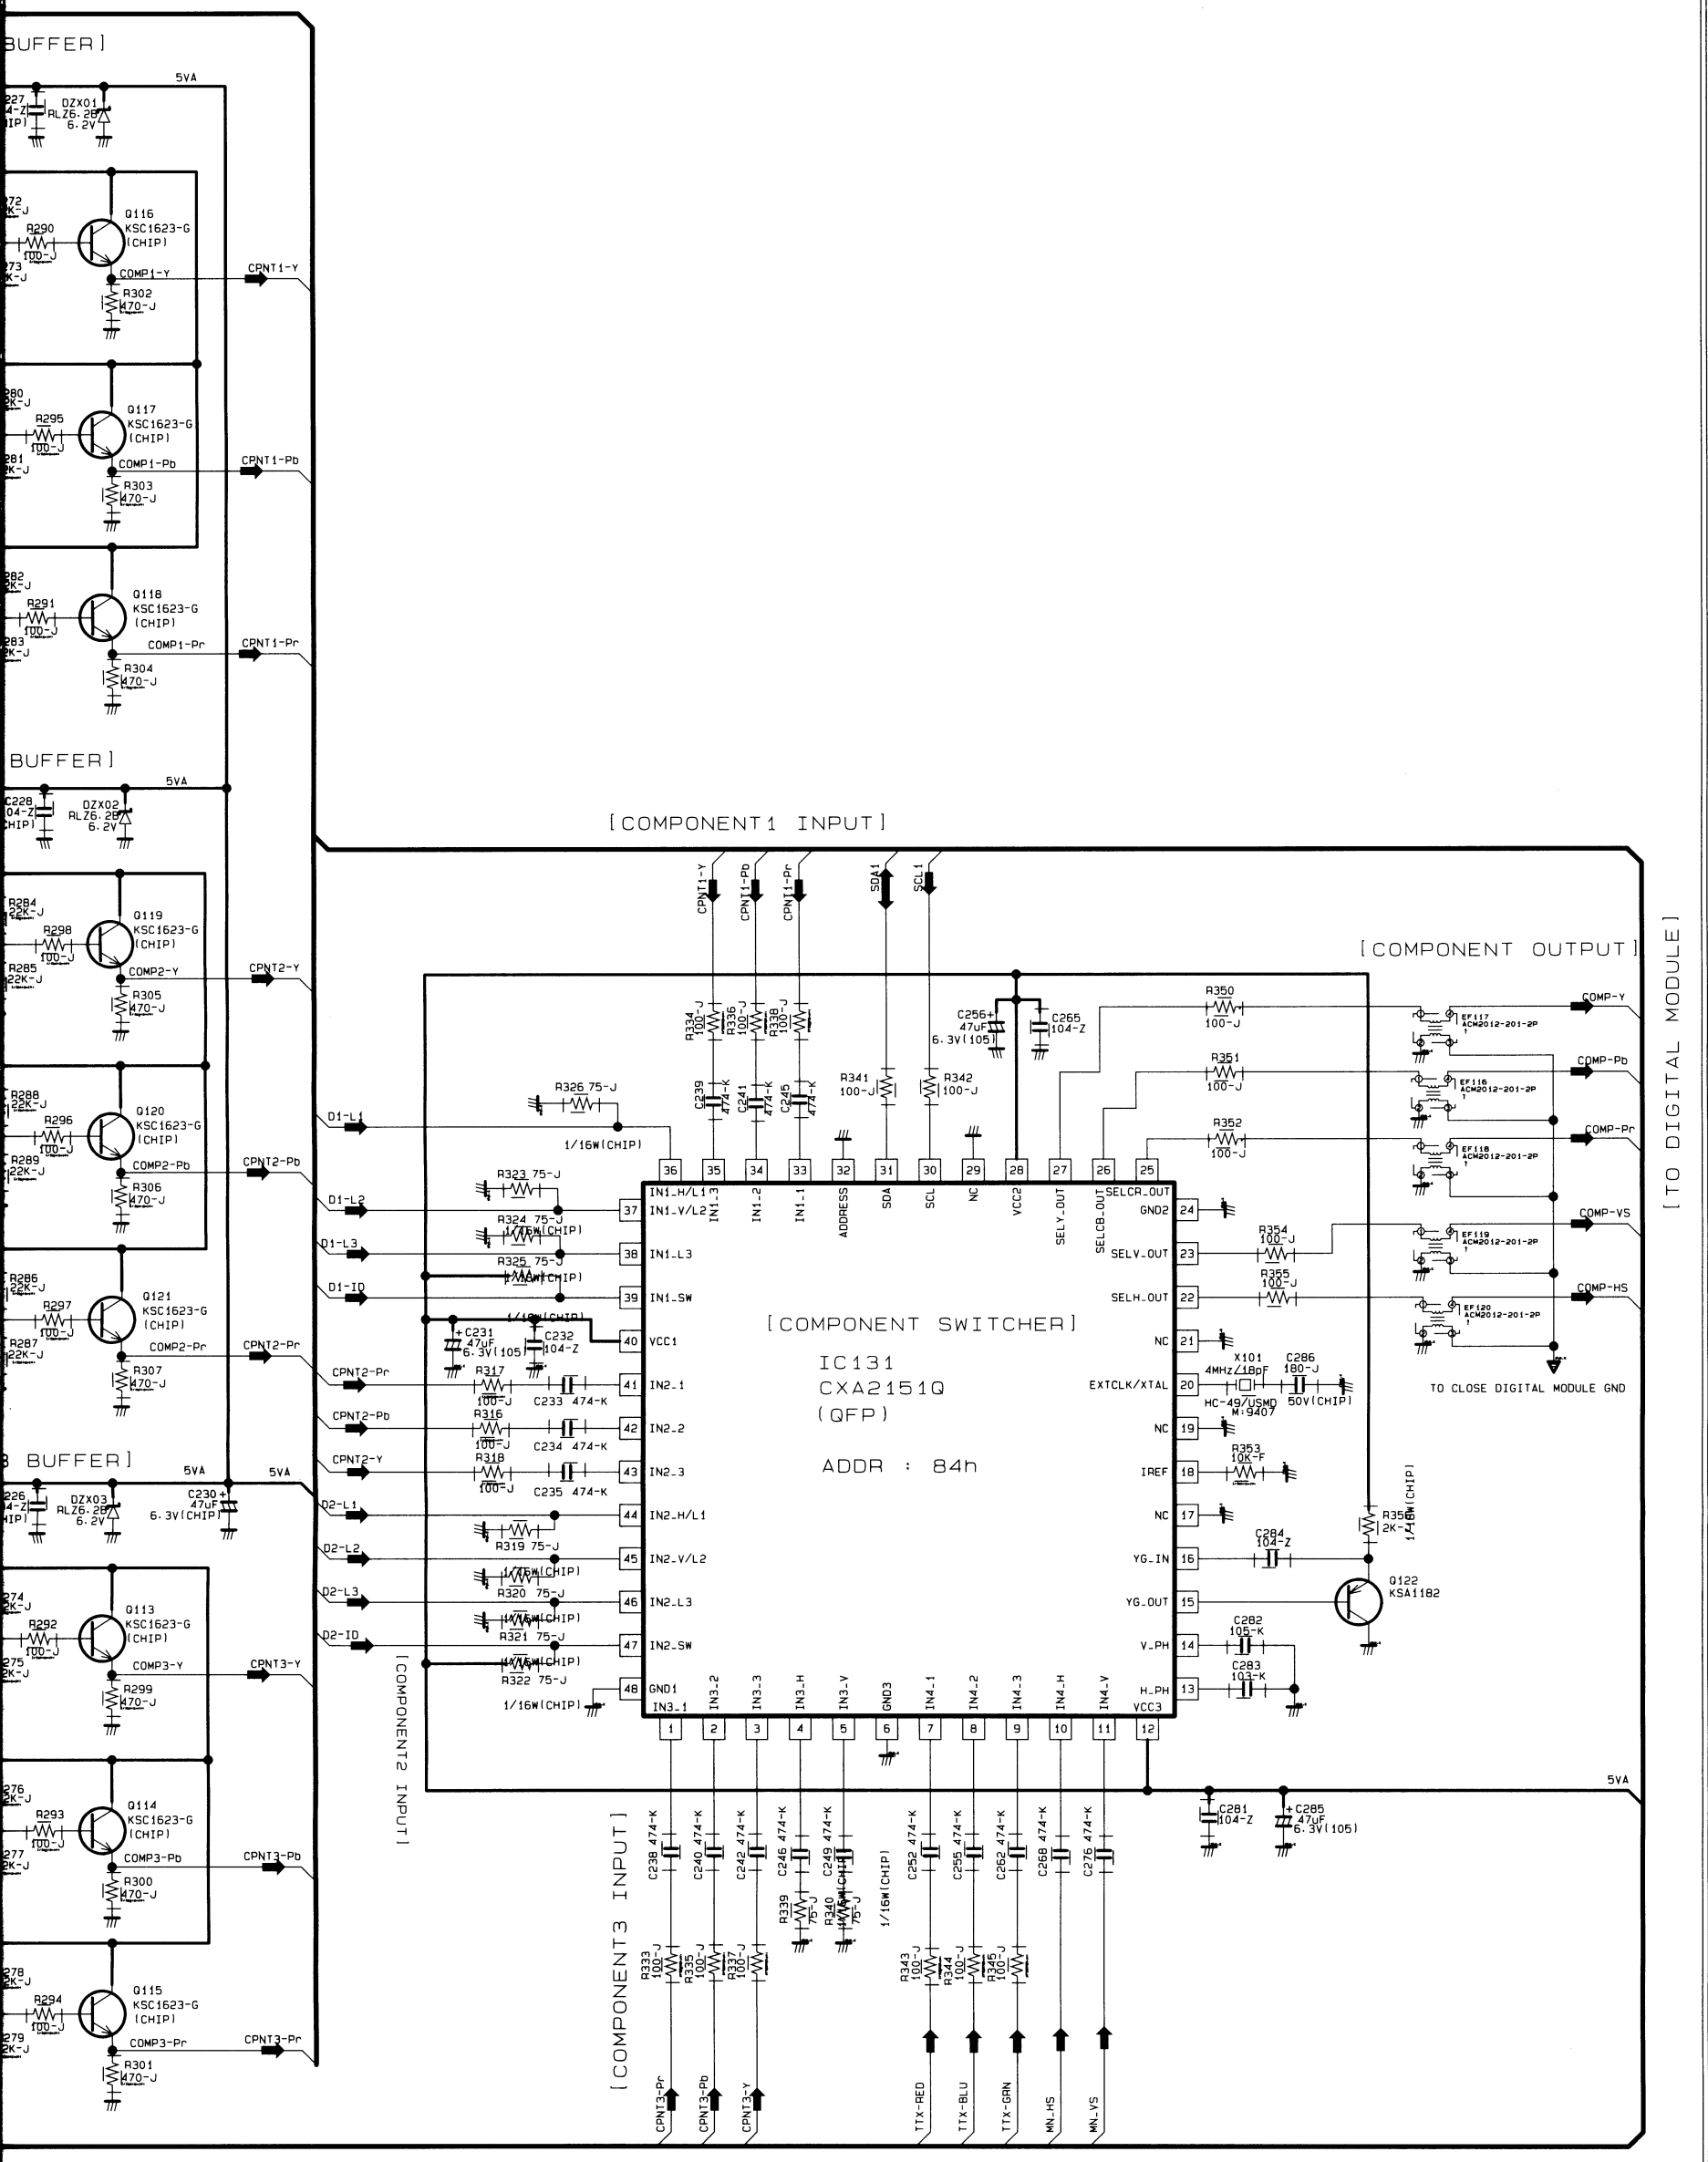
BUFFER]
5VA
DZX01 RLZ6.2B 6.2V
Q116 KSC1623-G (CHIP)
R290 100-J
COMP1-Y
R302 470-J
CPNT1-Y
Q117 KSC1623-G (CHIP)
R295 100-J
COMP1-Pb
R303 470-J
CPNT1-Pb
Q118 KSC1623-G (CHIP)
R291 100-J
COMP1-Pr
R304 470-J
CPNT1-Pr
BUFFER]
5VA
DZX02 RLZ6.2B 6.2V
Q119 KSC1623-G (CHIP)
R298 100-J
COMP2-Y
R305 470-J
CPNT2-Y
Q120 KSC1623-G (CHIP)
R296 100-J
COMP2-Pb
R306 470-J
CPNT2-Pb
Q121 KSC1623-G (CHIP)
R297 100-J
COMP2-Pr
R307 470-J
CPNT2-Pr
BUFFER]
5VA
5VA
DZX03 RLZ6.2B 6.2V
C230+ 47uF 6.3V(CHIP)
Q113 KSC1623-G (CHIP)
R292 100-J
COMP3-Y
R299 470-J
CPNT3-Y
Q114 KSC1623-G (CHIP)
R293 100-J
COMP3-Pb
R300 470-J
CPNT3-Pb
Q115 KSC1623-G (CHIP)
R294 100-J
COMP3-Pr
R301 470-J
CPNT3-Pr
[COMPONENT2 INPUT]
D1-L1
D1-L2
D1-L3
D1-ID
D2-L1
D2-L2
D2-L3
D2-ID
R326 75-J
R323 75-J
R324 75-J
R325 75-J
1/16W(CHIP)
C231 47uF 6.3V(105)
C232 104-Z
R317 100-J
C233 474-K
R316 100-J
C234 474-K
R318 100-J
C235 474-K
R319 75-J
R320 75-J
R321 75-J
R322 75-J
[COMPONENT1 INPUT]
CPNT1-Y
CPNT1-Pb
CPNT1-Pr
SDA1
SCL1
R334 100-J
R336 100-J
R338 100-J
C239 474-K
C241 474-K
C245 474-K
R341 100-J
R342 100-J
C256+ 47uF 6.3V(105)
C265 104-Z
[COMPONENT SWITCHER]
IC131
CXA2151Q
(QFP)
ADDR : 84h
IN1_H/L1
IN1_V/L2
IN1_L3
IN1_SW
VCC1
IN2_1
IN2_2
IN2_3
IN2_H/L1
IN2_V/L2
IN2_L3
IN2_SW
GND1
IN3_1
IN3_2
IN3_3
IN3_H
IN3_V
GND3
IN4_1
IN4_2
IN4_3
IN4_H
IN4_V
VCC3
SELCR_OUT
GND2
SELV_OUT
SELH_OUT
NC
EXTCLK/XTAL
NC
IREF
NC
YG_IN
YG_OUT
V_PH
H_PH
SELCB_OUT
SELY_OUT
ADDRESS
SDA
SCL
NC
VCC2
[COMPONENT OUTPUT]
R350 100-J
R351 100-J
R352 100-J
R354 100-J
R355 100-J
X101 4MHz/18pF
HC-49/USMD M:9407
C286 180-J 50V(CHIP)
R353 10K-F
C284 104-Z
R356 2K-F 1/16W(CHIP)
Q122 KSA1182
C282 105-K
C283 103-K
EF117 ACM2012-201-2P
EF116 ACM2012-201-2P
EF118 ACM2012-201-2P
EF119 ACM2012-201-2P
EF120 ACM2012-201-2P
COMP-Y
COMP-Pb
COMP-Pr
COMP-VS
COMP-HS
TO CLOSE DIGITAL MODULE GND
[TO DIGITAL MODULE]
C281 104-Z
C285 47uF 6.3V(105)
[COMPONENT3 INPUT]
C238 474-K
C240 474-K
C242 474-K
C246 474-K
C249 474-K
C252 474-K
C255 474-K
C262 474-K
C268 474-K
C276 474-K
R333 100-J
R335 100-J
R337 100-J
R339 75-J
R340 75-J
R343 100-J
R344 100-J
R345 100-J
1/16W(CHIP)
CPNT3-Pr
CPNT3-Pb
CPNT3-Y
TTX-RED
TTX-BLU
TTX-GRN
MN_HS
MN_VS

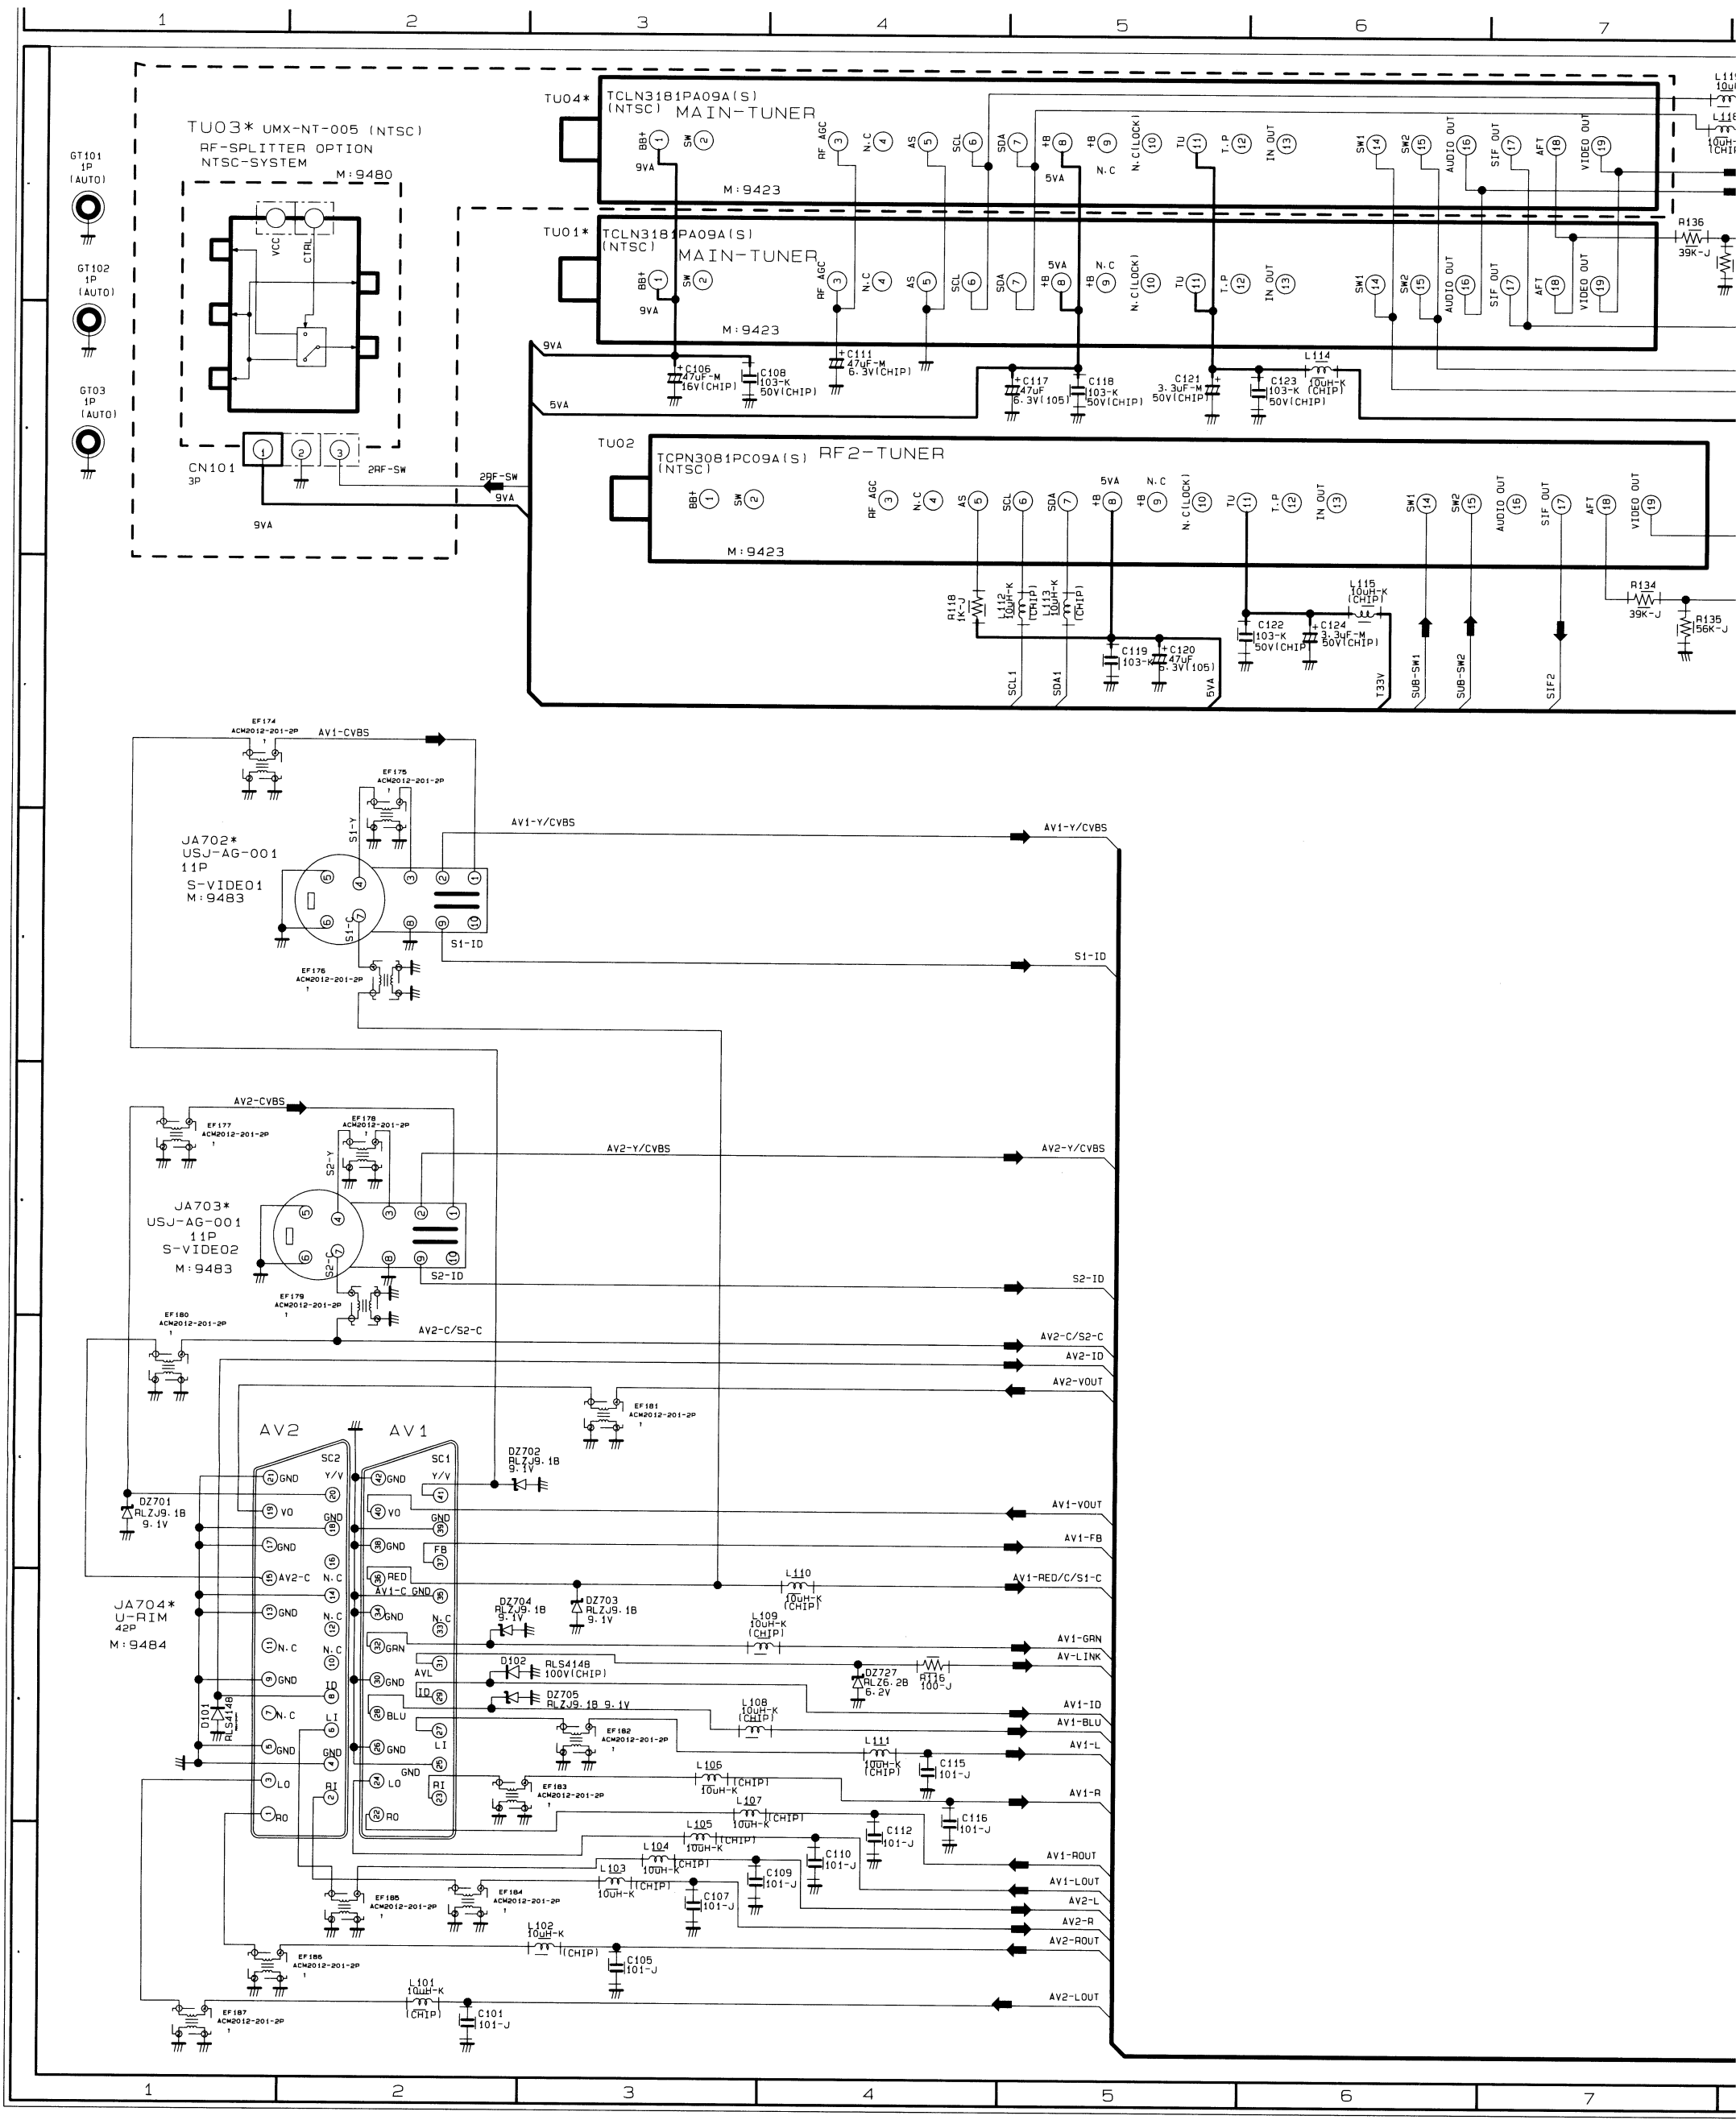
TU03* UMX-NT-005 (NTSC)
RF-SPLITTER OPTION
NTSC-SYSTEM
M:9480
GT101 1P (AUTO)
GT102 1P (AUTO)
GT03 1P (AUTO)
CN101 3P
2RF-SW
9VA
TU04* TCLN3181PA09A(S) (NTSC) MAIN-TUNER
TU01* TCLN3181PA09A(S) (NTSC) MAIN-TUNER
M:9423
TU02 TCPN3081PC09A(S) (NTSC) RF2-TUNER
5VA
C106 47uF-M 16V(CHIP)
C108 103-K 50V(CHIP)
C111 47uF-M 6.3V(CHIP)
C117 47uF 6.3V(105)
C118 103-K 50V(CHIP)
C121 3.3uF-M 50V(CHIP)
C123 103-K 50V(CHIP)
L114 10UH-K (CHIP)
R136 39K-J
R118 1K-J
L112 10UH-K (CHIP)
L113 10UH-K (CHIP)
C119 103-K
C120 47uF 6.3V(105)
L115 10UH-K (CHIP)
C122 103-K 50V(CHIP)
C124 3.3uF-M 50V(CHIP)
R134 39K-J
R135 56K-J
SCL1
SDA1
T33V
SUB-SW1
SUB-SW2
SIF2
EF174 ACM2012-201-2P
AV1-CVBS
EF175 ACM2012-201-2P
JA702* USJ-AG-001 11P S-VIDEO1 M:9483
S1-Y
S1-C
S1-ID
AV1-Y/CVBS
EF176 ACM2012-201-2P
EF177 ACM2012-201-2P
AV2-CVBS
EF178 ACM2012-201-2P
JA703* USJ-AG-001 11P S-VIDEO2 M:9483
S2-Y
S2-C
S2-ID
AV2-Y/CVBS
EF179 ACM2012-201-2P
EF180 ACM2012-201-2P
AV2-C/S2-C
AV2-ID
AV2-VOUT
EF181 ACM2012-201-2P
JA704* U-RIM 42P M:9484
AV2
AV1
SC2
SC1
DZ701 RLZJ9.1B 9.1V
DZ702 RLZJ9.1B 9.1V
DZ703 RLZJ9.1B 9.1V
DZ704 RLZJ9.1B 9.1V
DZ705 RLZJ9.1B 9.1V
DZ727 RLZ6.2B 6.2V
D101 RLS414B
D102 RLS414B 100V(CHIP)
R116 100-J
L110 10UH-K (CHIP)
L109 10UH-K (CHIP)
L108 10UH-K (CHIP)
L111 10UH-K (CHIP)
L106 10UH-K (CHIP)
L107 10UH-K (CHIP)
L105 10UH-K (CHIP)
L104 10UH-K (CHIP)
L103 10UH-K (CHIP)
L102 10UH-K (CHIP)
L101 10UH-K (CHIP)
C115 101-J
C116 101-J
C112 101-J
C110 101-J
C109 101-J
C107 101-J
C105 101-J
C101 101-J
EF182 ACM2012-201-2P
EF183 ACM2012-201-2P
EF184 ACM2012-201-2P
EF185 ACM2012-201-2P
EF186 ACM2012-201-2P
EF187 ACM2012-201-2P
AV1-VOUT
AV1-FB
AV1-RED/C/S1-C
AV1-GRN
AV-LINK
AV1-ID
AV1-BLU
AV1-L
AV1-R
AV1-ROUT
AV1-LOUT
AV2-L
AV2-R
AV2-ROUT
AV2-LOUT

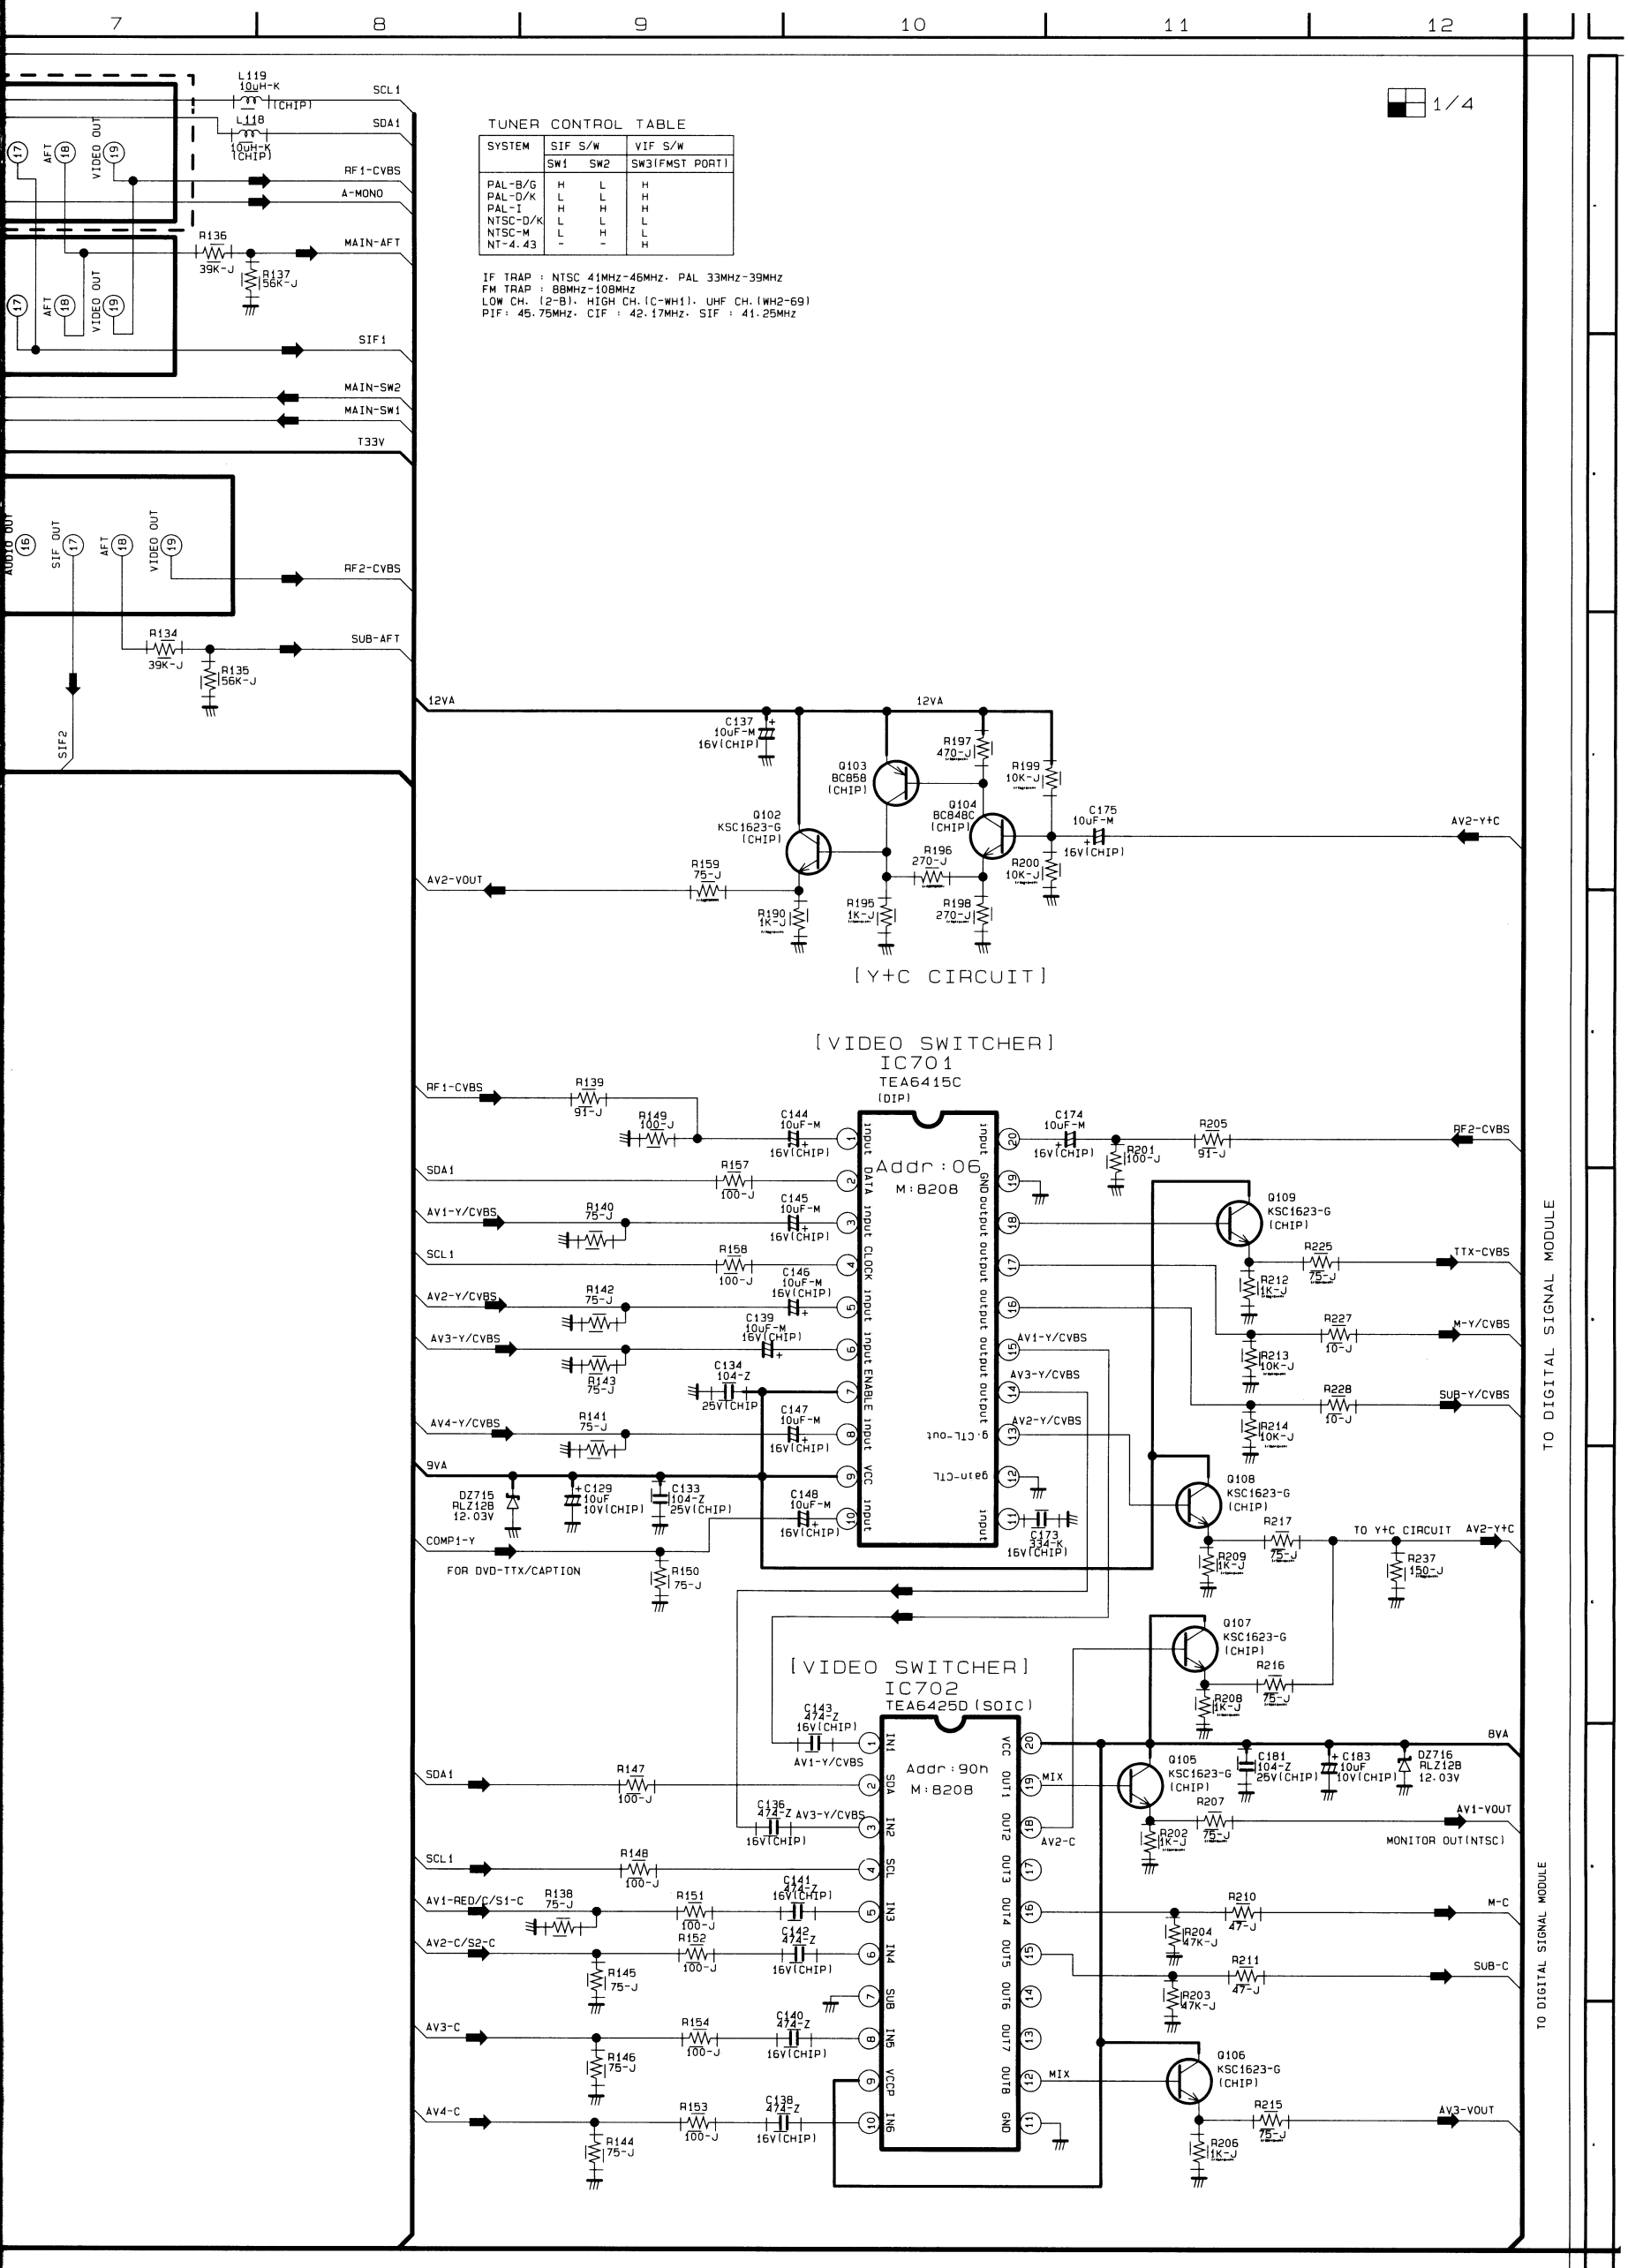
7
8
9
10
11
12
1/4
TUNER CONTROL TABLE
SYSTEM | SIF S/W SW1 SW2 | VIF S/W SW3(FMST PORT)
PAL-B/G H L H
PAL-D/K L L H
PAL-I H H H
NTSC-D/K L L L
NTSC-M L H L
NT-4.43 - - H
IF TRAP : NTSC 41MHz-46MHz, PAL 33MHz-39MHz
FM TRAP : 88MHz-108MHz
LOW CH. (2-B), HIGH CH.(C-WH1), UHF CH.(WH2-69)
PIF: 45.75MHz, CIF : 42.17MHz, SIF : 41.25MHz
L119 10uH-K (CHIP)
L118 10UH-K (CHIP)
SCL1
SDA1
RF1-CVBS
A-MONO
MAIN-AFT
SIF1
MAIN-SW2
MAIN-SW1
T33V
RF2-CVBS
SUB-AFT
SIF2
12VA
C137 10uF-M 16V(CHIP)
Q103 BC858 (CHIP)
Q102 KSC1623-G (CHIP)
Q104 BC848C (CHIP)
R197 470-J
R199 10K-J
R200 10K-J
C175 10uF-M 16V(CHIP)
AV2-Y+C
AV2-VOUT
R159 75-J
R190 1K-J
R195 1K-J
R196 270-J
R198 270-J
[Y+C CIRCUIT]
[VIDEO SWITCHER]
IC701
TEA6415C
(DIP)
Addr : 06
M:8208
C144 10uF-M 16V(CHIP)
C145 10uF-M 16V(CHIP)
C146 10uF-M 16V(CHIP)
C139 10uF-M 16V(CHIP)
C134 104-Z 25V(CHIP)
C147 10uF-M 16V(CHIP)
C148 10uF-M 16V(CHIP)
C129 10uF 10V(CHIP)
C133 104-Z 25V(CHIP)
C173 334-K 16V(CHIP)
C174 10uF-M 16V(CHIP)
DZ715 RLZ12B 12.03V
9VA
COMP1-Y
FOR DVD-TTX/CAPTION
R150 75-J
R157 100-J
R158 100-J
R139 91-J
R149 100-J
R140 75-J
R142 75-J
R143 75-J
R141 75-J
R201 100-J
R205 91-J
AV1-Y/CVBS
AV3-Y/CVBS
AV2-Y/CVBS
Q109 KSC1623-G (CHIP)
Q108 KSC1623-G (CHIP)
Q107 KSC1623-G (CHIP)
R225 75-J
R227 10-J
R228 10-J
R212 1K-J
R213 10K-J
R214 10K-J
TTX-CVBS
M-Y/CVBS
SUB-Y/CVBS
R217 75-J
R209 1K-J
R216 75-J
R208 1K-J
TO Y+C CIRCUIT
R237 150-J
[VIDEO SWITCHER]
IC702
TEA6425D (SOIC)
Addr : 90h
M:8208
C143 474-Z 16V(CHIP)
C136 474-Z 16V(CHIP)
C141 474-Z 16V(CHIP)
C142 474-Z 16V(CHIP)
C140 474-Z 16V(CHIP)
C138 474-Z 16V(CHIP)
AV1-Y/CVBS
AV3-Y/CVBS
AV2-C
MIX
R147 100-J
R148 100-J
R151 100-J
R152 100-J
R154 100-J
R153 100-J
R138 75-J
R145 75-J
R146 75-J
R144 75-J
AV1-RED/C/S1-C
AV2-C/S2-C
AV3-C
AV4-C
SDA1
SCL1
Q105 KSC1623-G (CHIP)
Q106 KSC1623-G (CHIP)
C181 104-Z 25V(CHIP)
C183 10uF 10V(CHIP)
DZ716 RLZ12B 12.03V
R207 75-J
R202 1K-J
R210 47-J
R204 47K-J
R211 47-J
R203 47K-J
R215 75-J
R206 1K-J
AV1-VOUT
MONITOR OUT(NTSC)
M-C
SUB-C
AV3-VOUT
TO DIGITAL SIGNAL MODULE

5-4 MAIN 4

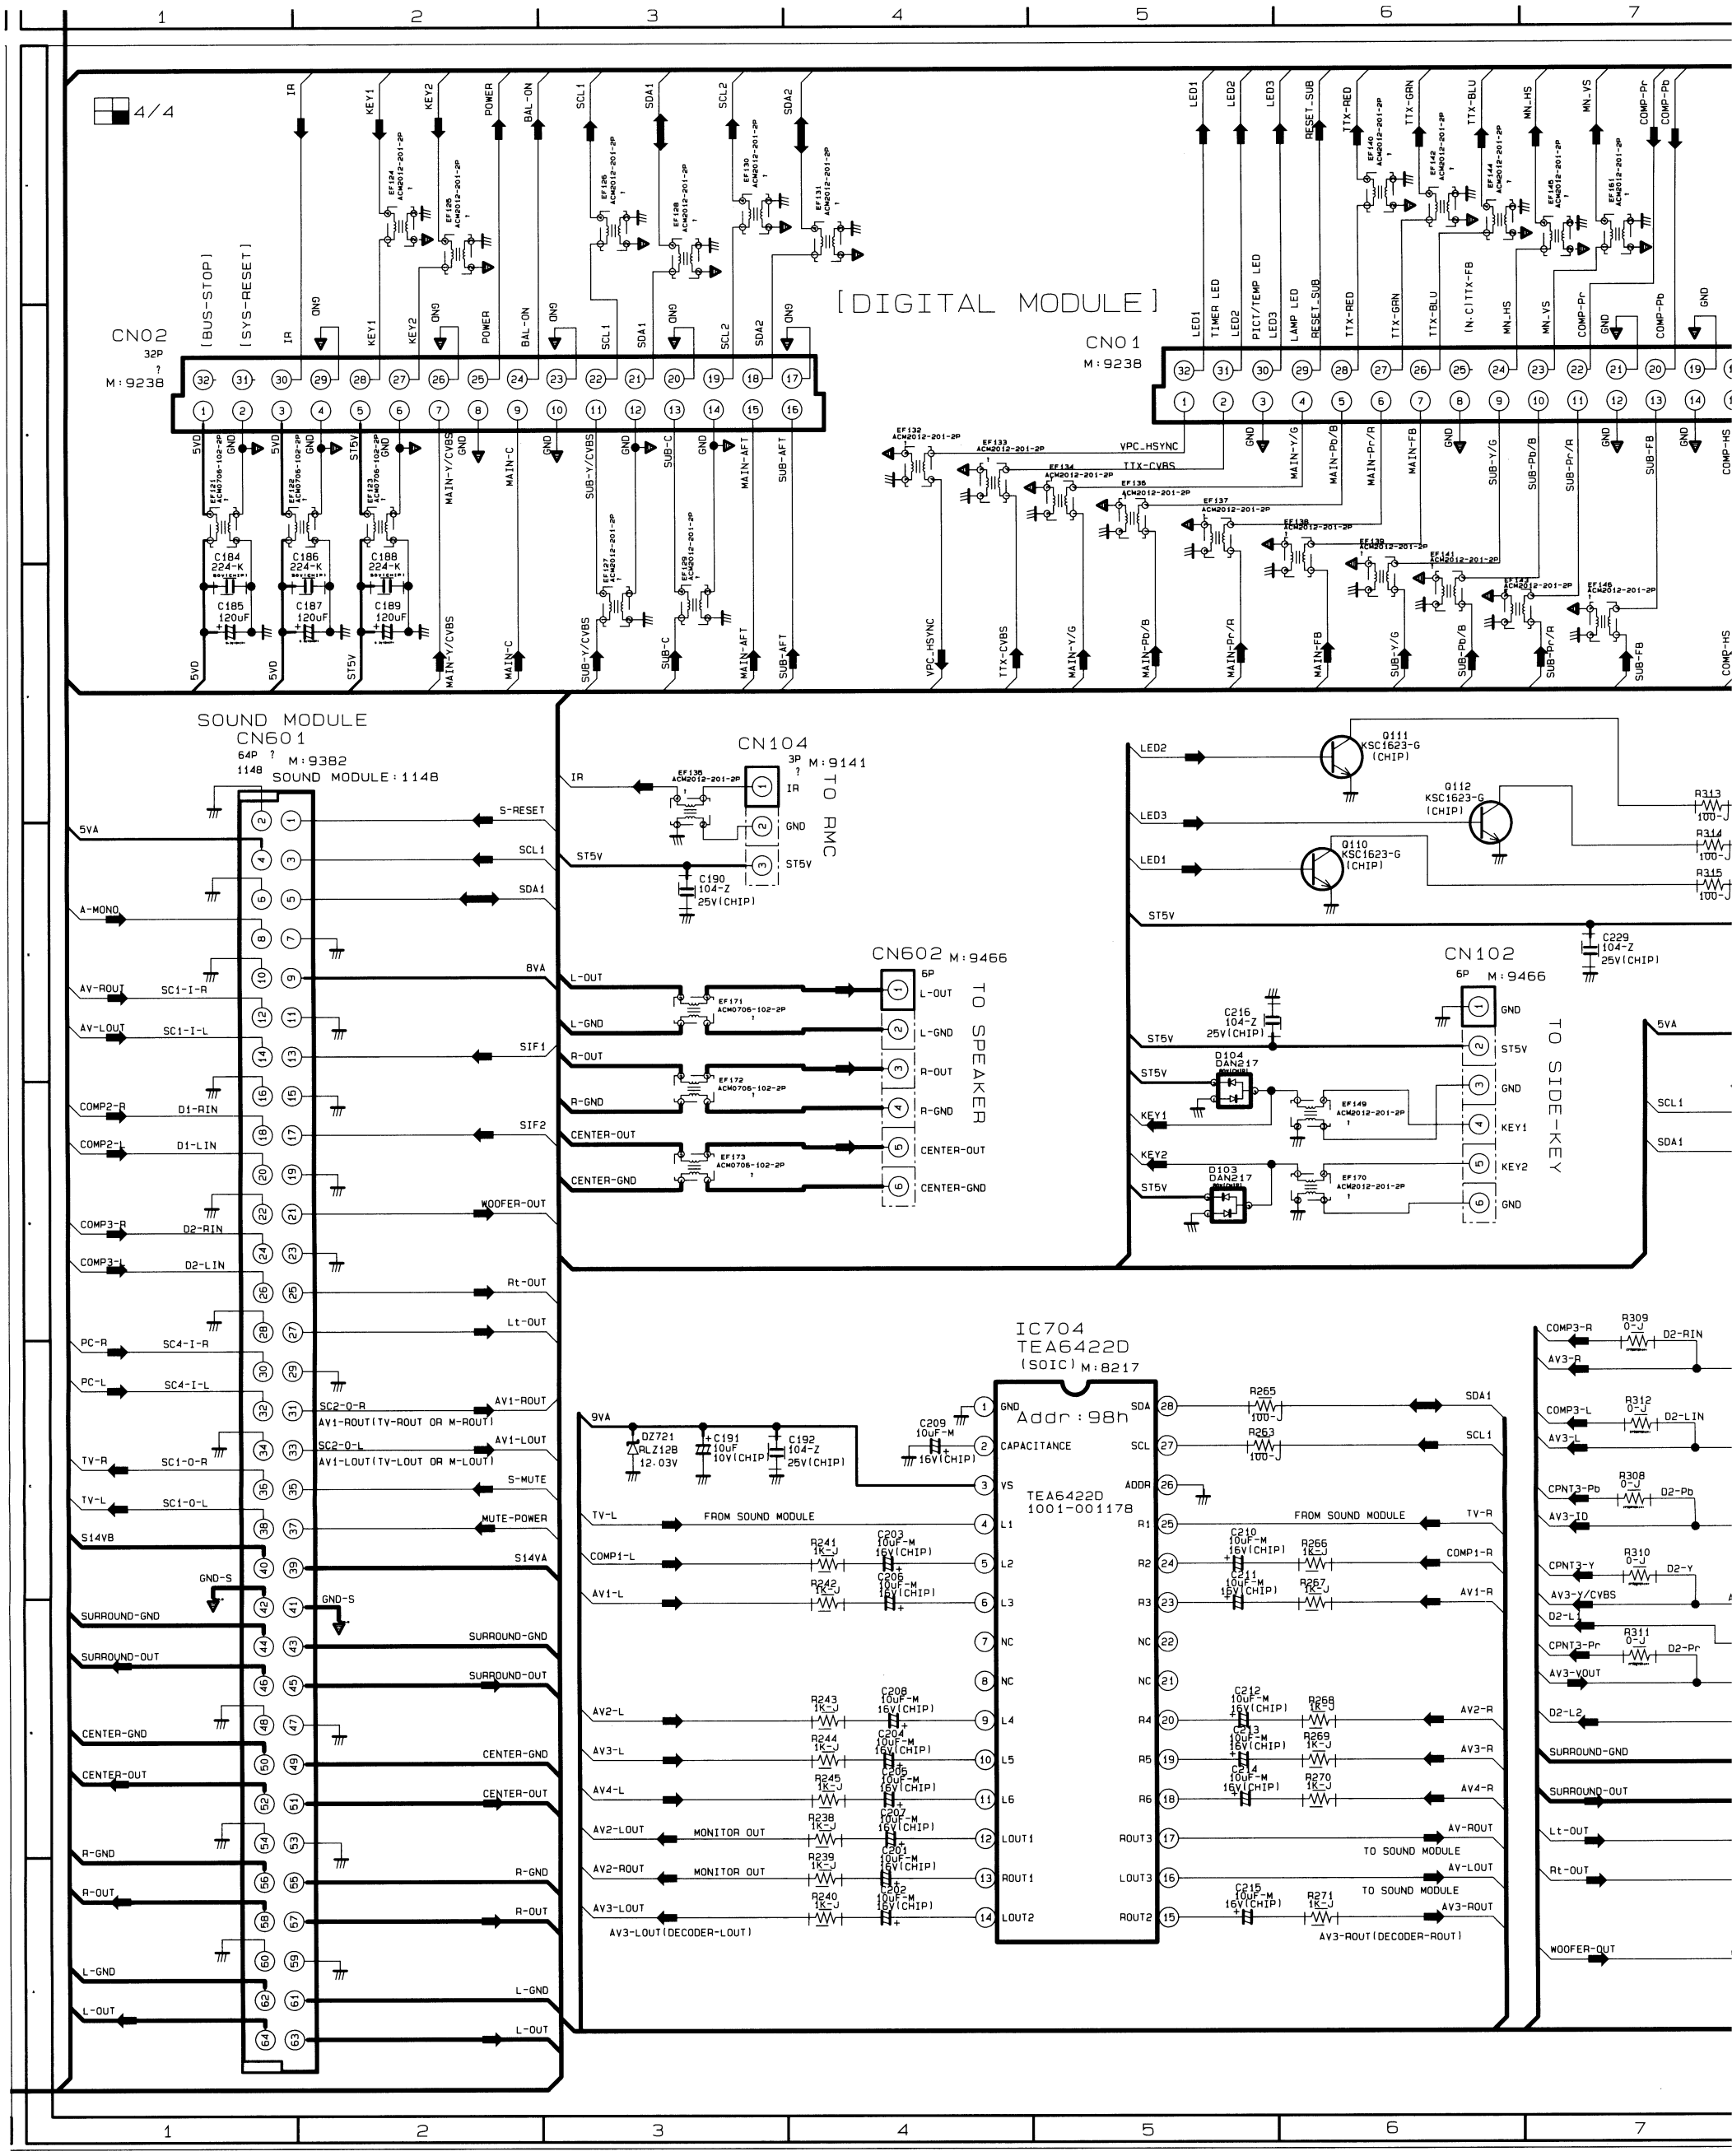
4/4
CN02
32P
M:9238
[BUS-STOP]
[SYS-RESET]
IR
KEY1
KEY2
POWER
BAL-ON
SCL1
SDA1
SCL2
SDA2
[DIGITAL MODULE]
CN01
M:9238
LED1
TIMER LED
LED2
PICT/TEMP LED
LED3
LAMP LED
RESET_SUB
TTX-RED
TTX-GRN
TTX-BLU
(N.C)TTX-FB
MN_HS
MN_VS
COMP-Pr
GND
COMP-Pb
COMP-HS
5VD
ST5V
MAIN-Y/CVBS
MAIN-C
SUB-Y/CVBS
SUB-C
MAIN-AFT
SUB-AFT
VPC_HSYNC
TTX-CVBS
MAIN-Y/G
MAIN-Pb/B
MAIN-Pr/R
MAIN-FB
SUB-Y/G
SUB-Pb/B
SUB-Pr/R
SUB-FB
SOUND MODULE
CN601
64P
1148
M:9382
SOUND MODULE:1148
S-RESET
SCL1
SDA1
A-MONO
8VA
AV-ROUT
SC1-I-R
AV-LOUT
SC1-I-L
SIF1
COMP2-R
D1-RIN
COMP2-L
D1-LIN
SIF2
COMP3-R
D2-RIN
COMP3-L
D2-LIN
WOOFER-OUT
Rt-OUT
Lt-OUT
PC-R
SC4-I-R
PC-L
SC4-I-L
SC2-O-R
AV1-ROUT(TV-ROUT OR M-ROUT)
AV1-ROUT
SC2-O-L
AV1-LOUT(TV-LOUT OR M-LOUT)
AV1-LOUT
TV-R
SC1-O-R
TV-L
SC1-O-L
S-MUTE
MUTE-POWER
S14VB
S14VA
GND-S
SURROUND-GND
SURROUND-OUT
CENTER-GND
CENTER-OUT
R-GND
R-OUT
L-GND
L-OUT
CN104
3P
M:9141
TO RMC
CN602
M:9466
6P
TO SPEAKER
CN102
6P
M:9466
TO SIDE-KEY
Q111
KSC1623-G
(CHIP)
Q112
KSC1623-G
(CHIP)
Q110
KSC1623-G
(CHIP)
R313
R314
R315
100-J
C229
104-Z
25V(CHIP)
C216
104-Z
25V(CHIP)
D104
DAN217
D103
DAN217
IC704
TEA6422D
(SOIC)M:8217
Addr:98h
TEA6422D
1001-001178
9VA
DZ721
RLZ12B
12.03V
C191
10uF
10V(CHIP)
C192
104-Z
25V(CHIP)
C209
10uF-M
16V(CHIP)
GND
CAPACITANCE
VS
ADDR
SDA
SCL
L1
L2
L3
NC
L4
L5
L6
LOUT1
ROUT1
LOUT2
R1
R2
R3
R4
R5
R6
ROUT3
LOUT3
ROUT2
FROM SOUND MODULE
MONITOR OUT
AV3-LOUT(DECODER-LOUT)
TO SOUND MODULE
AV3-ROUT(DECODER-ROUT)
R265
R263
100-J
R241
R242
R243
R244
R245
R238
R239
R240
1K-J
C203
C206
C204
C205
C207
C201
C202
10uF-M
16V(CHIP)
C210
C211
C212
C213
C214
C215
R266
R267
R268
R269
R270
R271
COMP3-R
AV3-R
COMP3-L
AV3-L
CPNT3-Pb
AV3-ID
CPNT3-Y
AV3-Y/CVBS
CPNT3-Pr
AV3-VOUT
D2-L1
D2-L2
R309
R312
R308
R310
R311
0-J
D2-RIN
D2-LIN
D2-Pb
D2-Y
D2-Pr

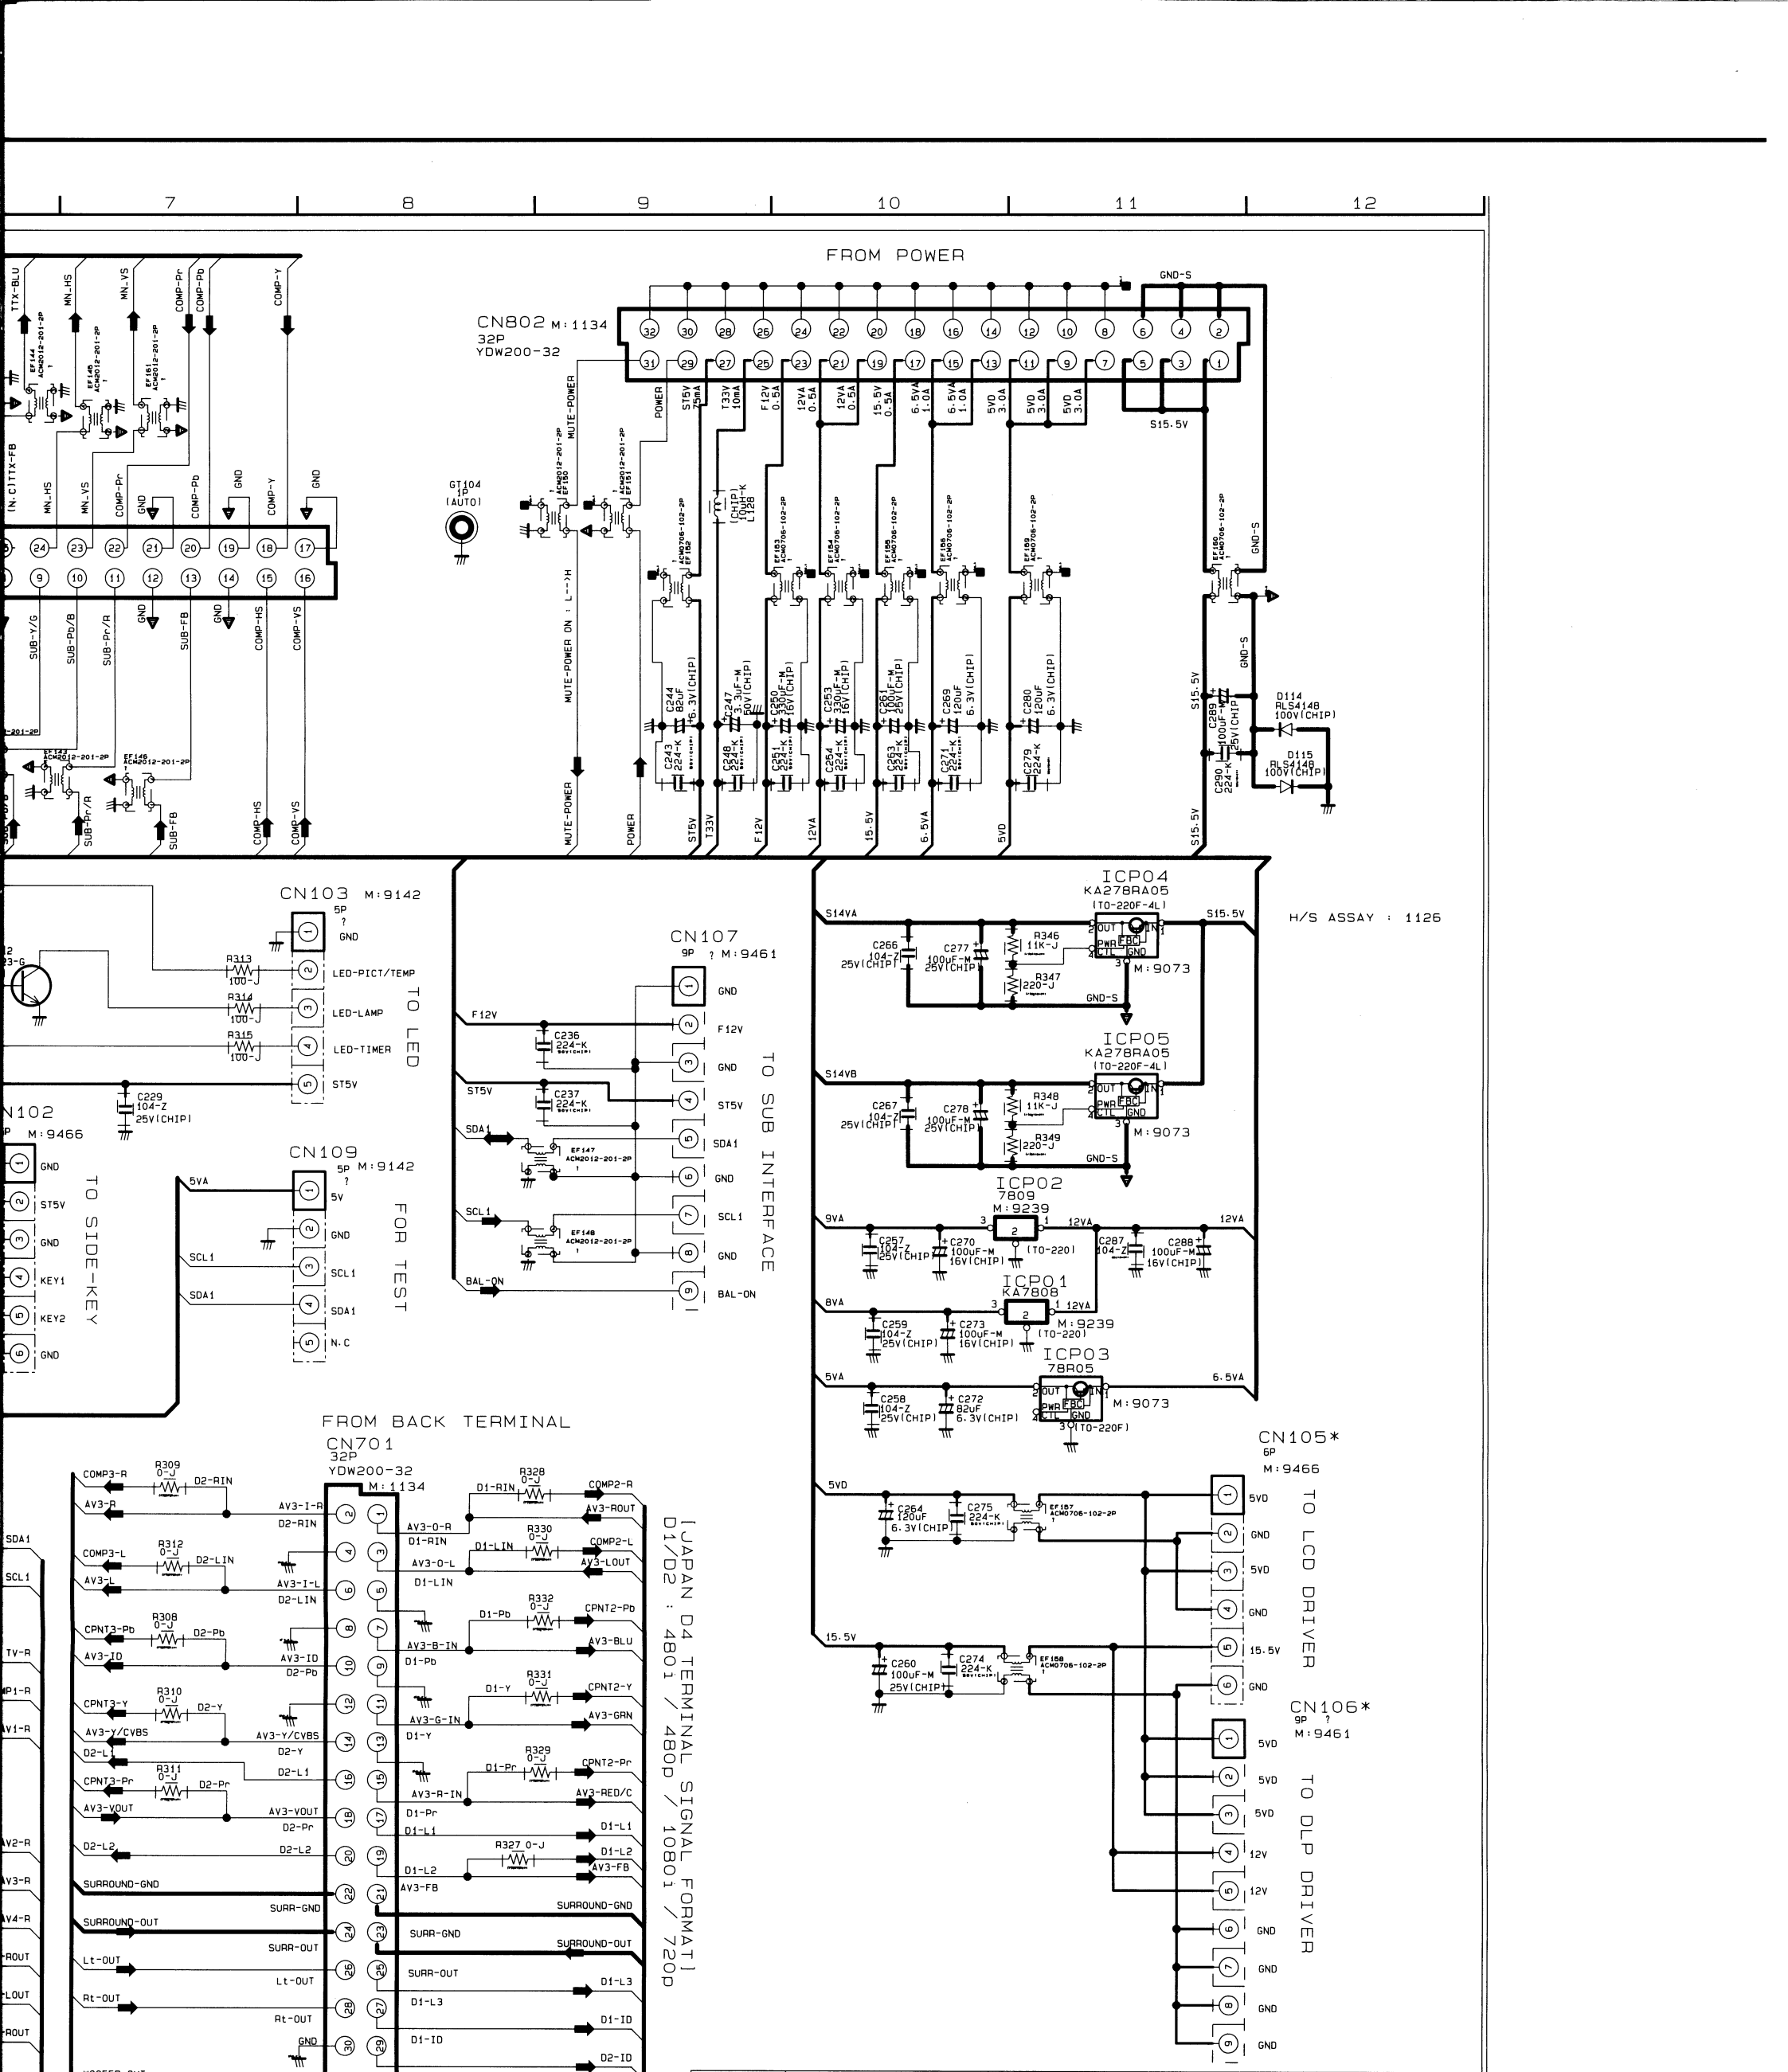

TITLE	PAL/NTSC. ALADDIN. 3PLCD/DLP PJTV. MAIN. AA41-00672A					
DATE	2002.03.08					
SAMSUNG	Doc. CODE	DS020123-0017	Rev. No		SHEET NO	/

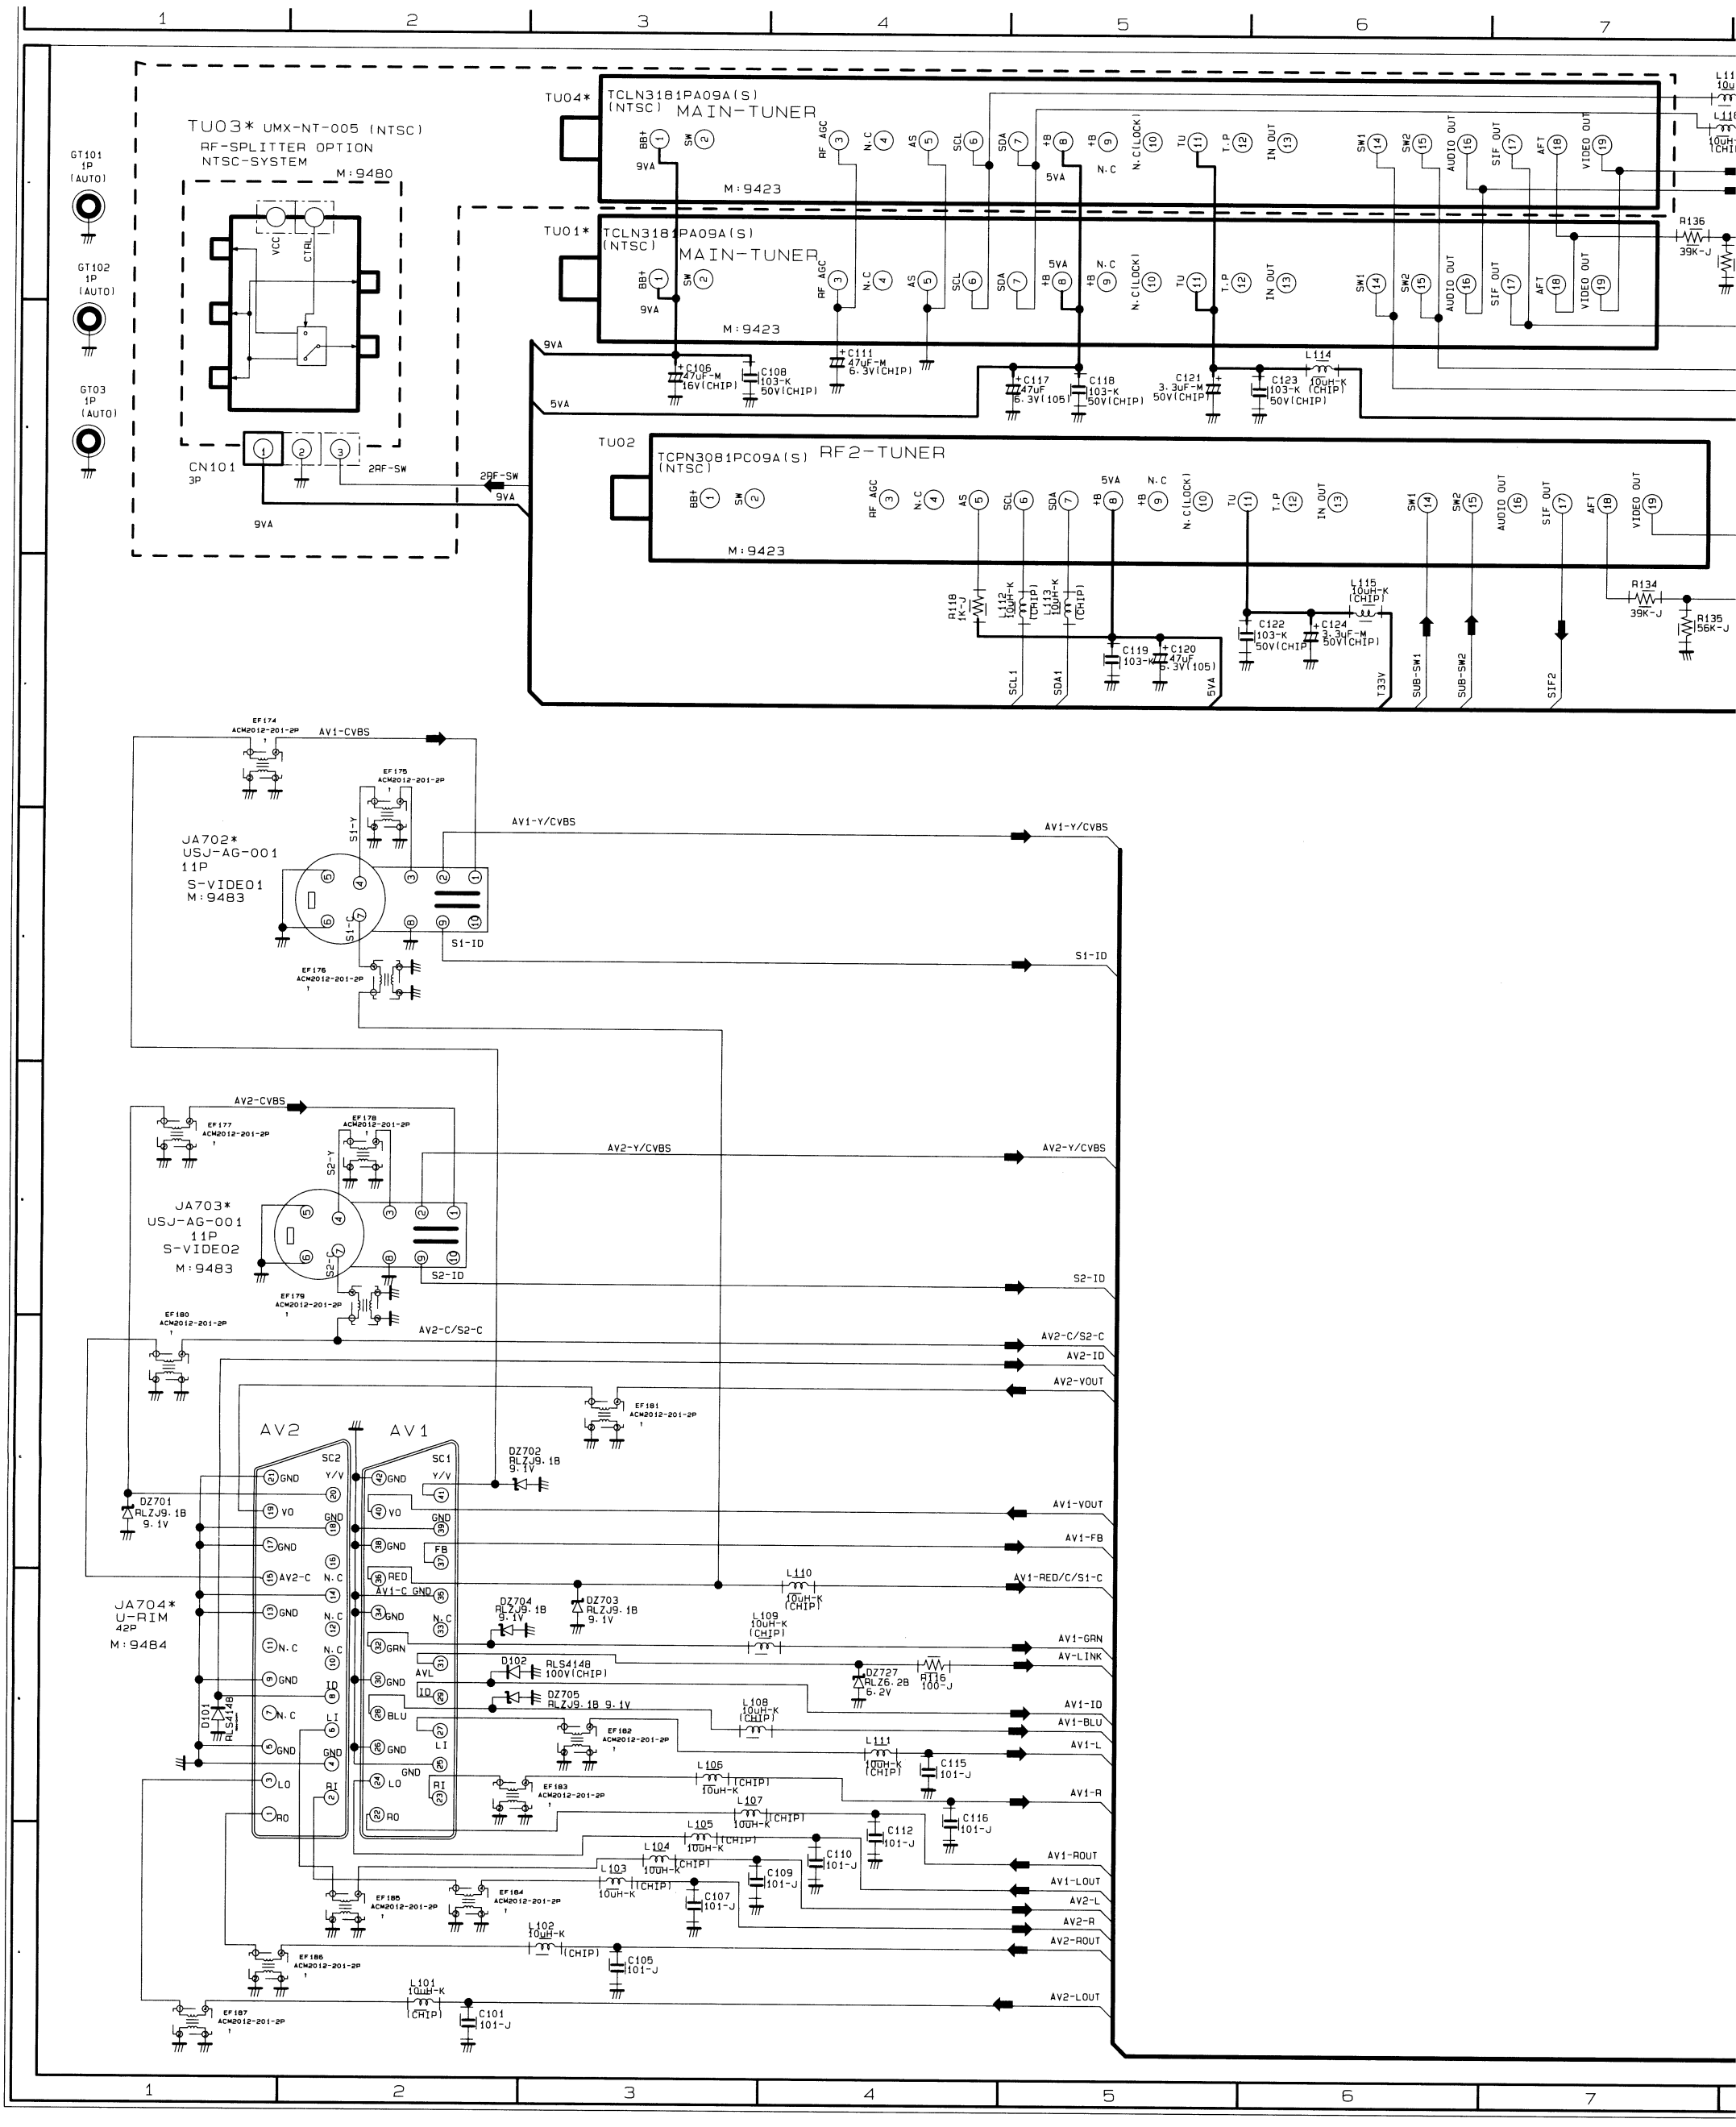
TU03* UMX-NT-005 (NTSC)
RF-SPLITTER OPTION
NTSC-SYSTEM
M:9480
GT101 1P (AUTO)
GT102 1P (AUTO)
GT03 1P (AUTO)
CN101 3P
2RF-SW
9VA
TU04* TCLN3181PA09A(S) (NTSC) MAIN-TUNER
TU01* TCLN3181PA09A(S) (NTSC) MAIN-TUNER
M:9423
TU02 TCPN3081PC09A(S) (NTSC) RF2-TUNER
5VA
SCL1
SDA1
T33V
SUB-SW1
SUB-SW2
SIF2
JA702* USJ-AG-001 11P S-VIDEO1 M:9483
JA703* USJ-AG-001 11P S-VIDEO2 M:9483
JA704* U-RIM 42P M:9484
AV1-CVBS
AV1-Y/CVBS
S1-ID
AV2-CVBS
AV2-Y/CVBS
S2-ID
AV2-C/S2-C
AV2-ID
AV2-VOUT
AV1-VOUT
AV1-FB
AV1-RED/C/S1-C
AV1-GRN
AV-LINK
AV1-ID
AV1-BLU
AV1-L
AV1-R
AV1-ROUT
AV1-LOUT
AV2-L
AV2-R
AV2-ROUT
AV2-LOUT
DZ701 RLZJ9.1B 9.1V
DZ702 RLZJ9.1B 9.1V
DZ703 RLZJ9.1B 9.1V
DZ704 RLZJ9.1B 9.1V
DZ705 RLZJ9.1B 9.1V
DZ727 RLZ6.2B 6.2V
D101 RLS4148
D102 RLS4148 100V(CHIP)
R136 39K-J
R134 39K-J
R135 56K-J
R118 1K-J
AT16 100-J
C106 47uF-M 16V(CHIP)
C108 103-K 50V(CHIP)
C111 47uF-M 6.3V(CHIP)
C117 47uF 6.3V(105)
C118 103-K 50V(CHIP)
C121 3.3uF-M 50V(CHIP)
C123 103-K 50V(CHIP)
C119 103-K
C120 47uF 6.3V(105)
C122 103-K 50V(CHIP)
C124 3.3uF-M 50V(CHIP)
L114 10UH-K (CHIP)
L115 10uH-K (CHIP)
L112 10uH-K (CHIP)
L113 10uH-K (CHIP)
L110 10uH-K (CHIP)
L109 10uH-K (CHIP)
L108 10uH-K (CHIP)
L111 10uH-K (CHIP)
L106 10uH-K (CHIP)
L107 10uH-K (CHIP)
L105 10uH-K (CHIP)
L104 10uH-K (CHIP)
L103 10uH-K (CHIP)
L102 10uH-K (CHIP)
L101 10uH-K (CHIP)
C115 101-J
C116 101-J
C112 101-J
C110 101-J
C109 101-J
C107 101-J
C105 101-J
C101 101-J
EF174 ACM2012-201-2P
EF175 ACM2012-201-2P
EF176 ACM2012-201-2P
EF177 ACM2012-201-2P
EF178 ACM2012-201-2P
EF179 ACM2012-201-2P
EF180 ACM2012-201-2P
EF181 ACM2012-201-2P
EF182 ACM2012-201-2P
EF183 ACM2012-201-2P
EF184 ACM2012-201-2P
EF185 ACM2012-201-2P
EF186 ACM2012-201-2P
EF187 ACM2012-201-2P
AV2
AV1
SC2
SC1

7 8 9 10 11 12

1/4

TUNER CONTROL TABLE

SYSTEM	SIF S/W		VIF S/W
	SW1	SW2	SW3(FMST PORT)
PAL-B/G	H	L	H
PAL-D/K	L	L	H
PAL-I	H	H	H
NTSC-D/K	L	L	L
NTSC-M	L	H	L
NT-4.43	-	-	H

IF TRAP : NTSC 41MHz-46MHz. PAL 33MHz-39MHz
FM TRAP : 88MHz-108MHz
LOW CH. (2-B). HIGH CH.(C-WH1). UHF CH.(WH2-69)
PIF: 45.75MHz. CIF : 42.17MHz. SIF : 41.25MHz

SIF OUT (17) AFT (18) VIDEO OUT (19)

L119 10uH-K (CHIP)
L118 10uH-K (CHIP)
SCL1
SDA1
RF1-CVBS
A-MONO
R136 39K-J
R137 56K-J
MAIN-AFT
SIF1
MAIN-SW2
MAIN-SW1
T33V

AUDIO OUT (16) SIF OUT (17) AFT (18) VIDEO OUT (19)

RF2-CVBS
R134 39K-J
R135 56K-J
SUB-AFT
SIF2

12VA

C137 10uF-M 16V(CHIP)
Q103 BC858 (CHIP)
R197 470-J
R199 10K-J
Q104 BC848C (CHIP)
Q102 KSC1623-G (CHIP)
C175 10uF-M 16V(CHIP)
AV2-Y+C
R196 270-J
R200 10K-J
R159 75-J
AV2-VOUT
R190 1K-J
R195 1K-J
R198 270-J

[Y+C CIRCUIT]

[VIDEO SWITCHER]
IC701
TEA6415C
(DIP)

RF1-CVBS
R139 91-J
R149 100-J
C144 10uF-M 16V(CHIP)
C174 10uF-M 16V(CHIP)
R205 91-J
R201 100-J
RF2-CVBS
SDA1
R157 100-J
AV1-Y/CVBS
R140 75-J
C145 10uF-M 16V(CHIP)
SCL1
R158 100-J
C146 10uF-M 16V(CHIP)
AV2-Y/CVBS
R142 75-J
C139 10uF-M 16V(CHIP)
AV3-Y/CVBS
R143 75-J
C134 104-Z 25V(CHIP)
AV4-Y/CVBS
R141 75-J
C147 10uF-M 16V(CHIP)
9VA
DZ715 RLZ12B 12.03V
C129 10uF 10V(CHIP)
C133 104-Z 25V(CHIP)
C148 10uF-M 16V(CHIP)
COMP1-Y
FOR DVD-TTX/CAPTION
R150 75-J

Addr : 06
M : 8208
input DATA
input CLOCK
input
input ENABLE
input VCC
input GND
output
output
output
output
g.ctl-out
gain-ctl
input
C173 334-K 16V(CHIP)

AV1-Y/CVBS
AV3-Y/CVBS
AV2-Y/CVBS

Q109 KSC1623-G (CHIP)
R225 75-J
TTX-CVBS
R212 1K-J
R227 10-J
M-Y/CVBS
R213 10K-J
R228 10-J
SUB-Y/CVBS
R214 10K-J
Q108 KSC1623-G (CHIP)
R217 75-J
TO Y+C CIRCUIT
AV2-Y+C
R209 1K-J
R237 150-J

Q107 KSC1623-G (CHIP)
R216 75-J
R208 1K-J

[VIDEO SWITCHER]
IC702
TEA6425D(SOIC)

C143 474-Z 16V(CHIP)
AV1-Y/CVBS
SDA1
R147 100-J
C136 474-Z AV3-Y/CVBS 16V(CHIP)
SCL1
R148 100-J
AV1-RED/C/S1-C
R138 75-J
R151 100-J
C141 474-Z 16V(CHIP)
AV2-C/S2-C
R152 100-J
C142 474-Z 16V(CHIP)
R145 75-J
AV3-C
R154 100-J
C140 474-Z 16V(CHIP)
R146 75-J
AV4-C
R153 100-J
C138 474-Z 16V(CHIP)
R144 75-J

Addr : 90h
M : 8208
IN1 SDA IN2 SCL IN3 IN4 SUB IN5 VCCP ING
VCC OUT1 OUT2 OUT3 OUT4 OUT5 OUT6 OUT7 OUT8 GND
MIX
AV2-C
MIX

8VA
Q105 KSC1623-G (CHIP)
C181 104-Z 25V(CHIP)
C183 10uF 10V(CHIP)
DZ716 RLZ12B 12.03V
R207
AV1-VOUT
MONITOR OUT(NTSC)
R202 1K-J
R210 47-J
M-C
R204 47K-J
R211 47-J
SUB-C
R203 47K-J
Q106 KSC1623-G (CHIP)
R215 75-J
AV3-VOUT
R206 1K-J

TO DIGITAL SIGNAL MODULE

5-4 MAIN 4

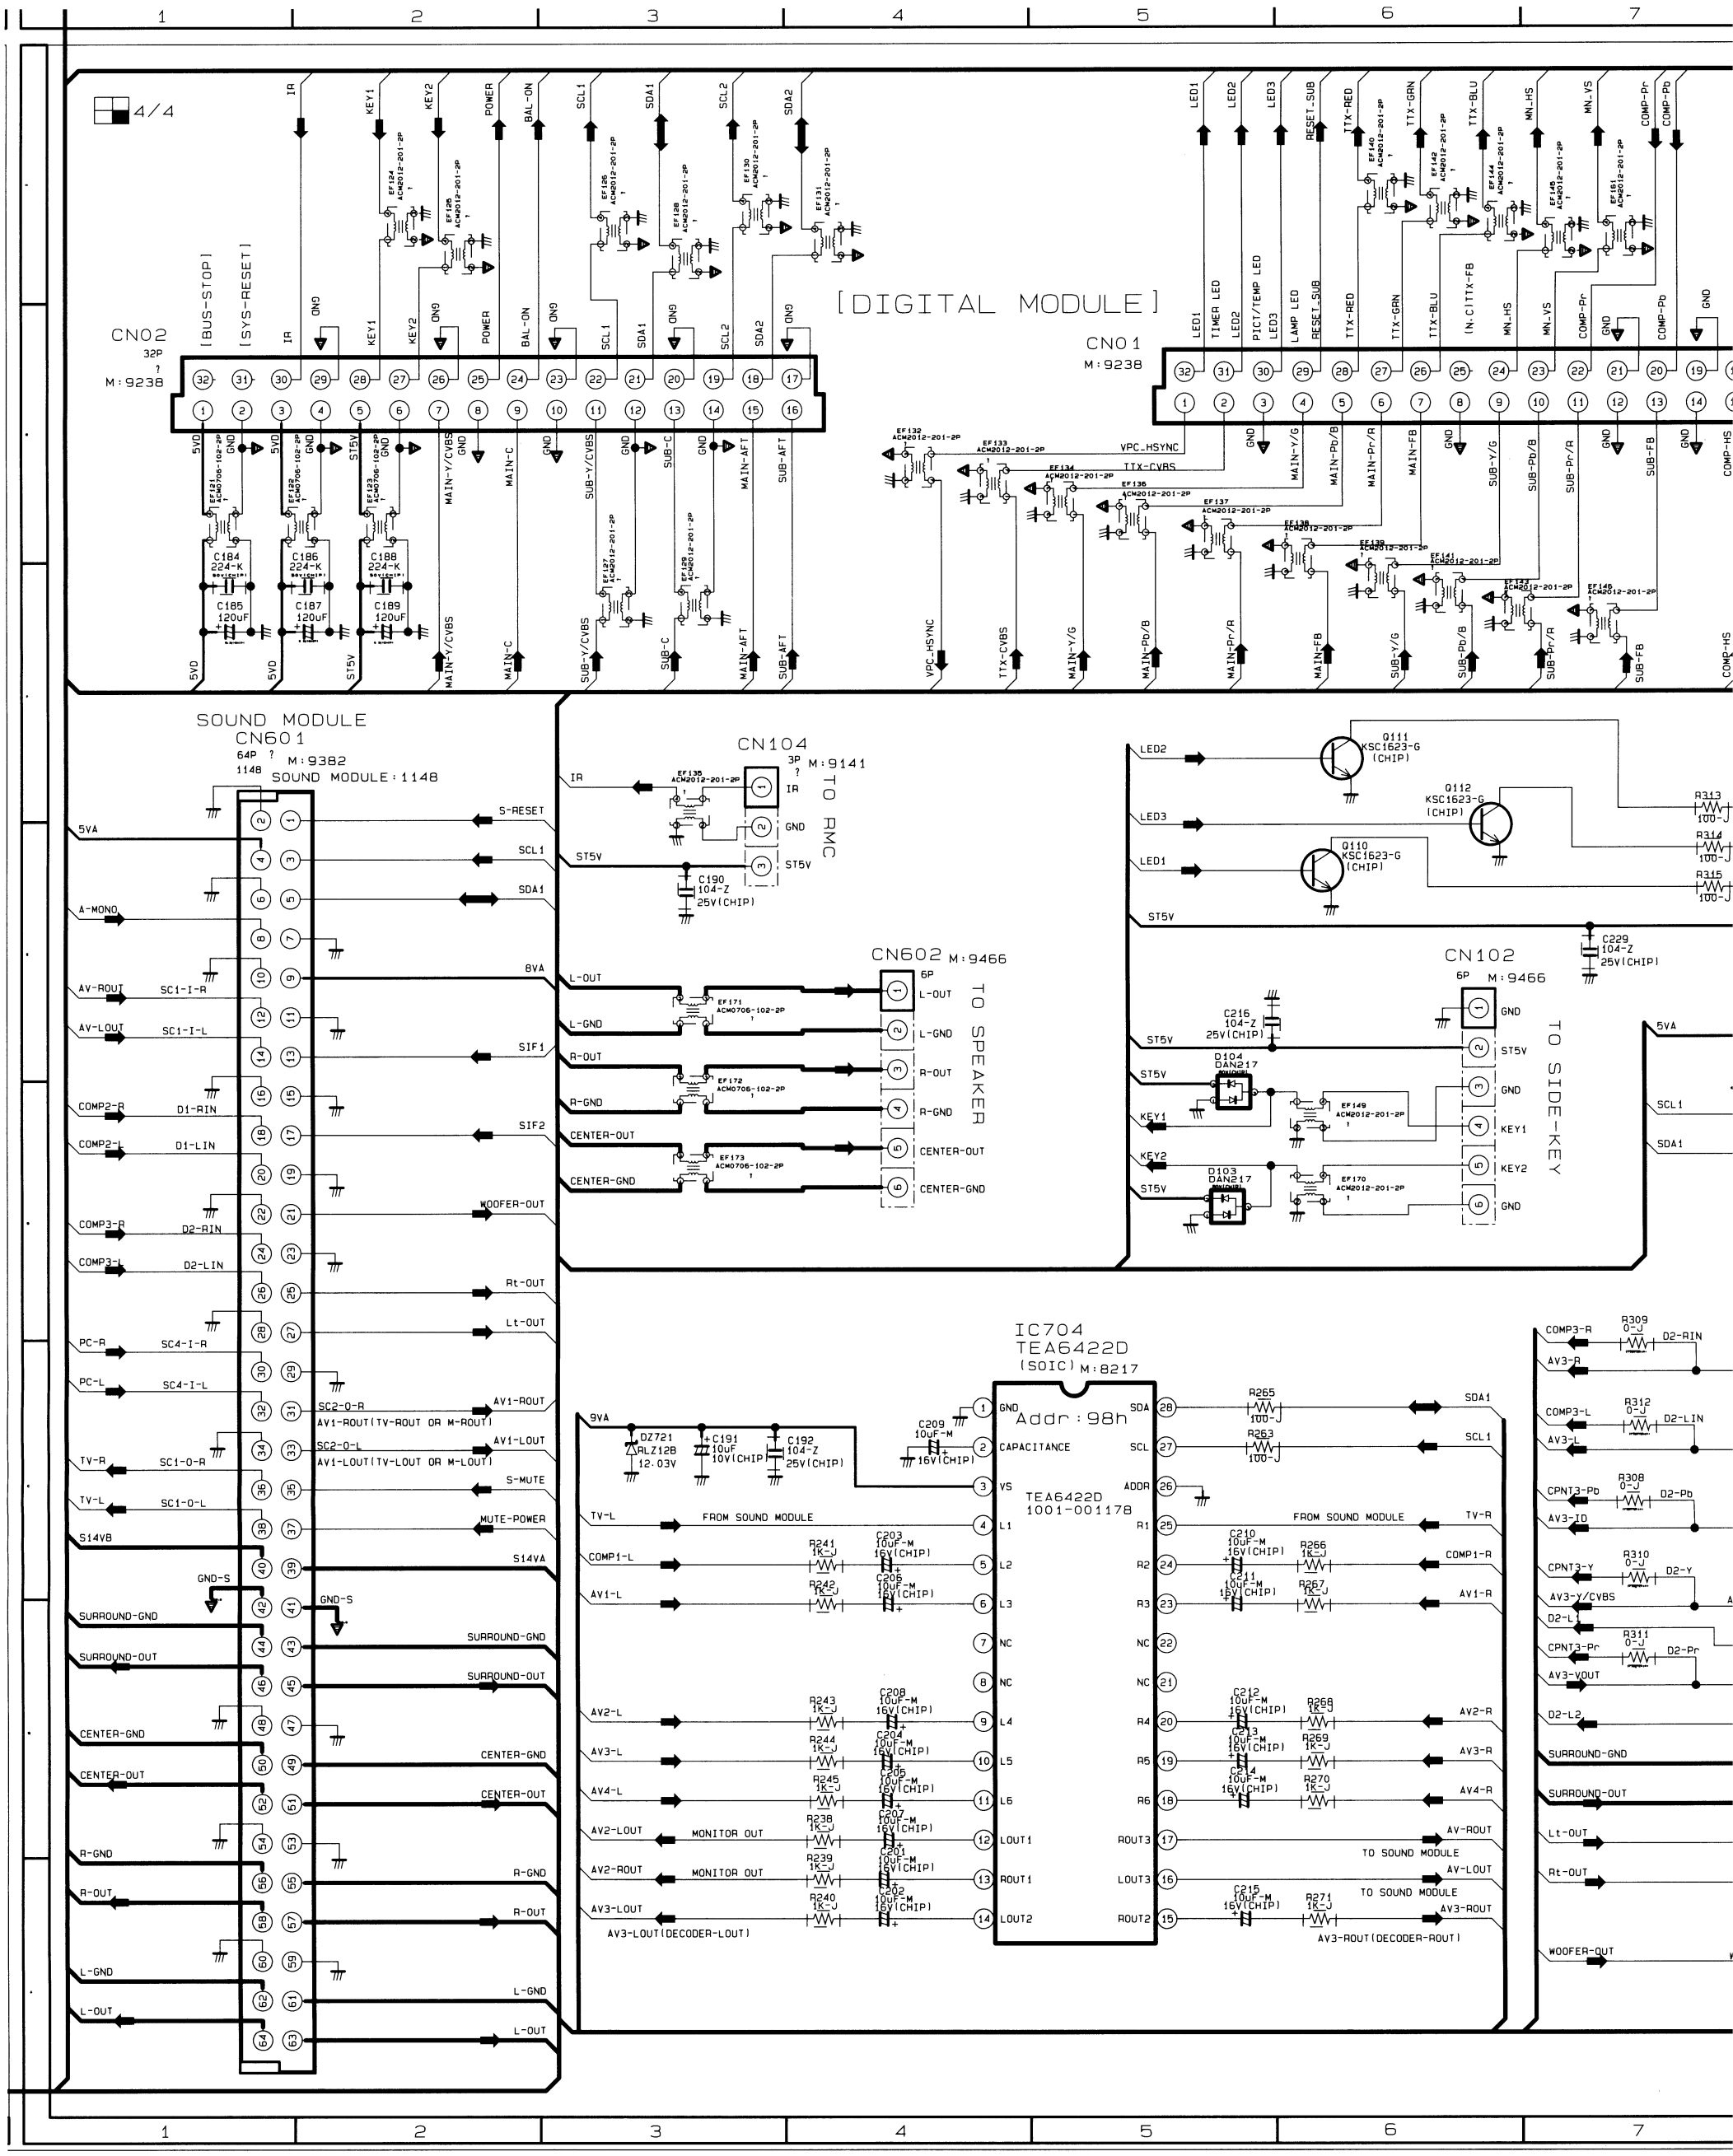
4/4
CN02
32P
M:9238
[BUS-STOP]
[SYS-RESET]
IR
KEY1
KEY2
POWER
BAL-ON
SCL1
SDA1
SCL2
SDA2
ON9
[DIGITAL MODULE]
CN01
M:9238
LED1
TIMER LED
LED2
PICT/TEMP LED
LED3
LAMP LED
RESET_SUB
TTX-RED
TTX-GRN
TTX-BLU
(N.C)TTX-FB
MN_HS
MN_VS
COMP-Pr
COMP-Pb
GND
5VD
ST5V
MAIN-Y/CVBS
MAIN-C
SUB-Y/CVBS
SUB-C
MAIN-AFT
SUB-AFT
VPC_HSYNC
TTX-CVBS
MAIN-Y/G
MAIN-Pb/B
MAIN-Pr/R
MAIN-FB
SUB-Y/G
SUB-Pb/B
SUB-Pr/R
SUB-FB
COMP-HS
SOUND MODULE
CN601
64P
M:9382
1148
SOUND MODULE:1148
S-RESET
SCL1
SDA1
5VA
A-MONO
8VA
AV-ROUT
SC1-I-R
AV-LOUT
SC1-I-L
SIF1
COMP2-R
D1-RIN
COMP2-L
D1-LIN
SIF2
COMP3-R
D2-RIN
COMP3-L
D2-LIN
WOOFER-OUT
Rt-OUT
Lt-OUT
PC-R
SC4-I-R
PC-L
SC4-I-L
SC2-O-R
AV1-ROUT
AV1-ROUT(TV-ROUT OR M-ROUT)
SC2-O-L
AV1-LOUT
AV1-LOUT(TV-LOUT OR M-LOUT)
TV-R
SC1-O-R
TV-L
SC1-O-L
S-MUTE
MUTE-POWER
S14VB
S14VA
GND-S
SURROUND-GND
SURROUND-OUT
CENTER-GND
CENTER-OUT
R-GND
R-OUT
L-GND
L-OUT
CN104
3P
M:9141
TO RMC
C190
104-Z
25V(CHIP)
CN602
M:9466
6P
TO SPEAKER
CN102
TO SIDE-KEY
C229
104-Z
25V(CHIP)
C216
104-Z
25V(CHIP)
D104
DAN217
D103
DAN217
Q111
KSC1623-G
(CHIP)
Q112
KSC1623-G
(CHIP)
Q110
KSC1623-G
(CHIP)
R313
100-J
R314
100-J
R315
100-J
IC704
TEA6422D
(SOIC)
M:8217
Addr:98h
TEA6422D
1001-001178
GND
CAPACITANCE
VS
L1
L2
L3
NC
NC
L4
L5
L6
LOUT1
ROUT1
LOUT2
SDA
SCL
ADDR
R1
R2
R3
NC
NC
R4
R5
R6
ROUT3
LOUT3
ROUT2
9VA
DZ721
RLZ12B
12.03V
C191
10uF
10V(CHIP)
C192
104-Z
25V(CHIP)
C209
10uF-M
16V(CHIP)
FROM SOUND MODULE
TV-L
COMP1-L
AV1-L
AV2-L
AV3-L
AV4-L
AV2-LOUT
AV2-ROUT
AV3-LOUT
MONITOR OUT
AV3-LOUT(DECODER-LOUT)
TV-R
COMP1-R
AV1-R
AV2-R
AV3-R
AV4-R
AV-ROUT
AV-LOUT
AV3-ROUT
TO SOUND MODULE
AV3-ROUT(DECODER-ROUT)
SDA1
SCL1
R265
100-J
R263
100-J
R241
1K-J
R242
1K-J
R243
1K-J
R244
1K-J
R245
1K-J
R238
1K-J
R239
1K-J
R240
1K-J
R266
1K-J
R267
1K-J
R268
1K-J
R269
1K-J
R270
1K-J
R271
1K-J
C203
10uF-M
16V(CHIP)
C206
10uF-M
16V(CHIP)
C208
10uF-M
16V(CHIP)
C204
10uF-M
16V(CHIP)
C205
10uF-M
16V(CHIP)
C207
10uF-M
16V(CHIP)
C201
10uF-M
16V(CHIP)
C202
10uF-M
16V(CHIP)
C210
10uF-M
16V(CHIP)
C211
10uF-M
16V(CHIP)
C212
10uF-M
16V(CHIP)
C213
10uF-M
16V(CHIP)
C214
10uF-M
16V(CHIP)
C215
10uF-M
16V(CHIP)
COMP3-R
AV3-R
COMP3-L
AV3-L
CPNT3-Pb
AV3-Pb
CPNT3-Y
AV3-Y/CVBS
CPNT3-Pr
AV3-VOUT
R309
0-J
R312
0-J
R308
0-J
R310
0-J
R311
0-J
D2-RIN
D2-LIN
D2-Pb
D2-Y
D2-Pr
D2-L1
D2-L2

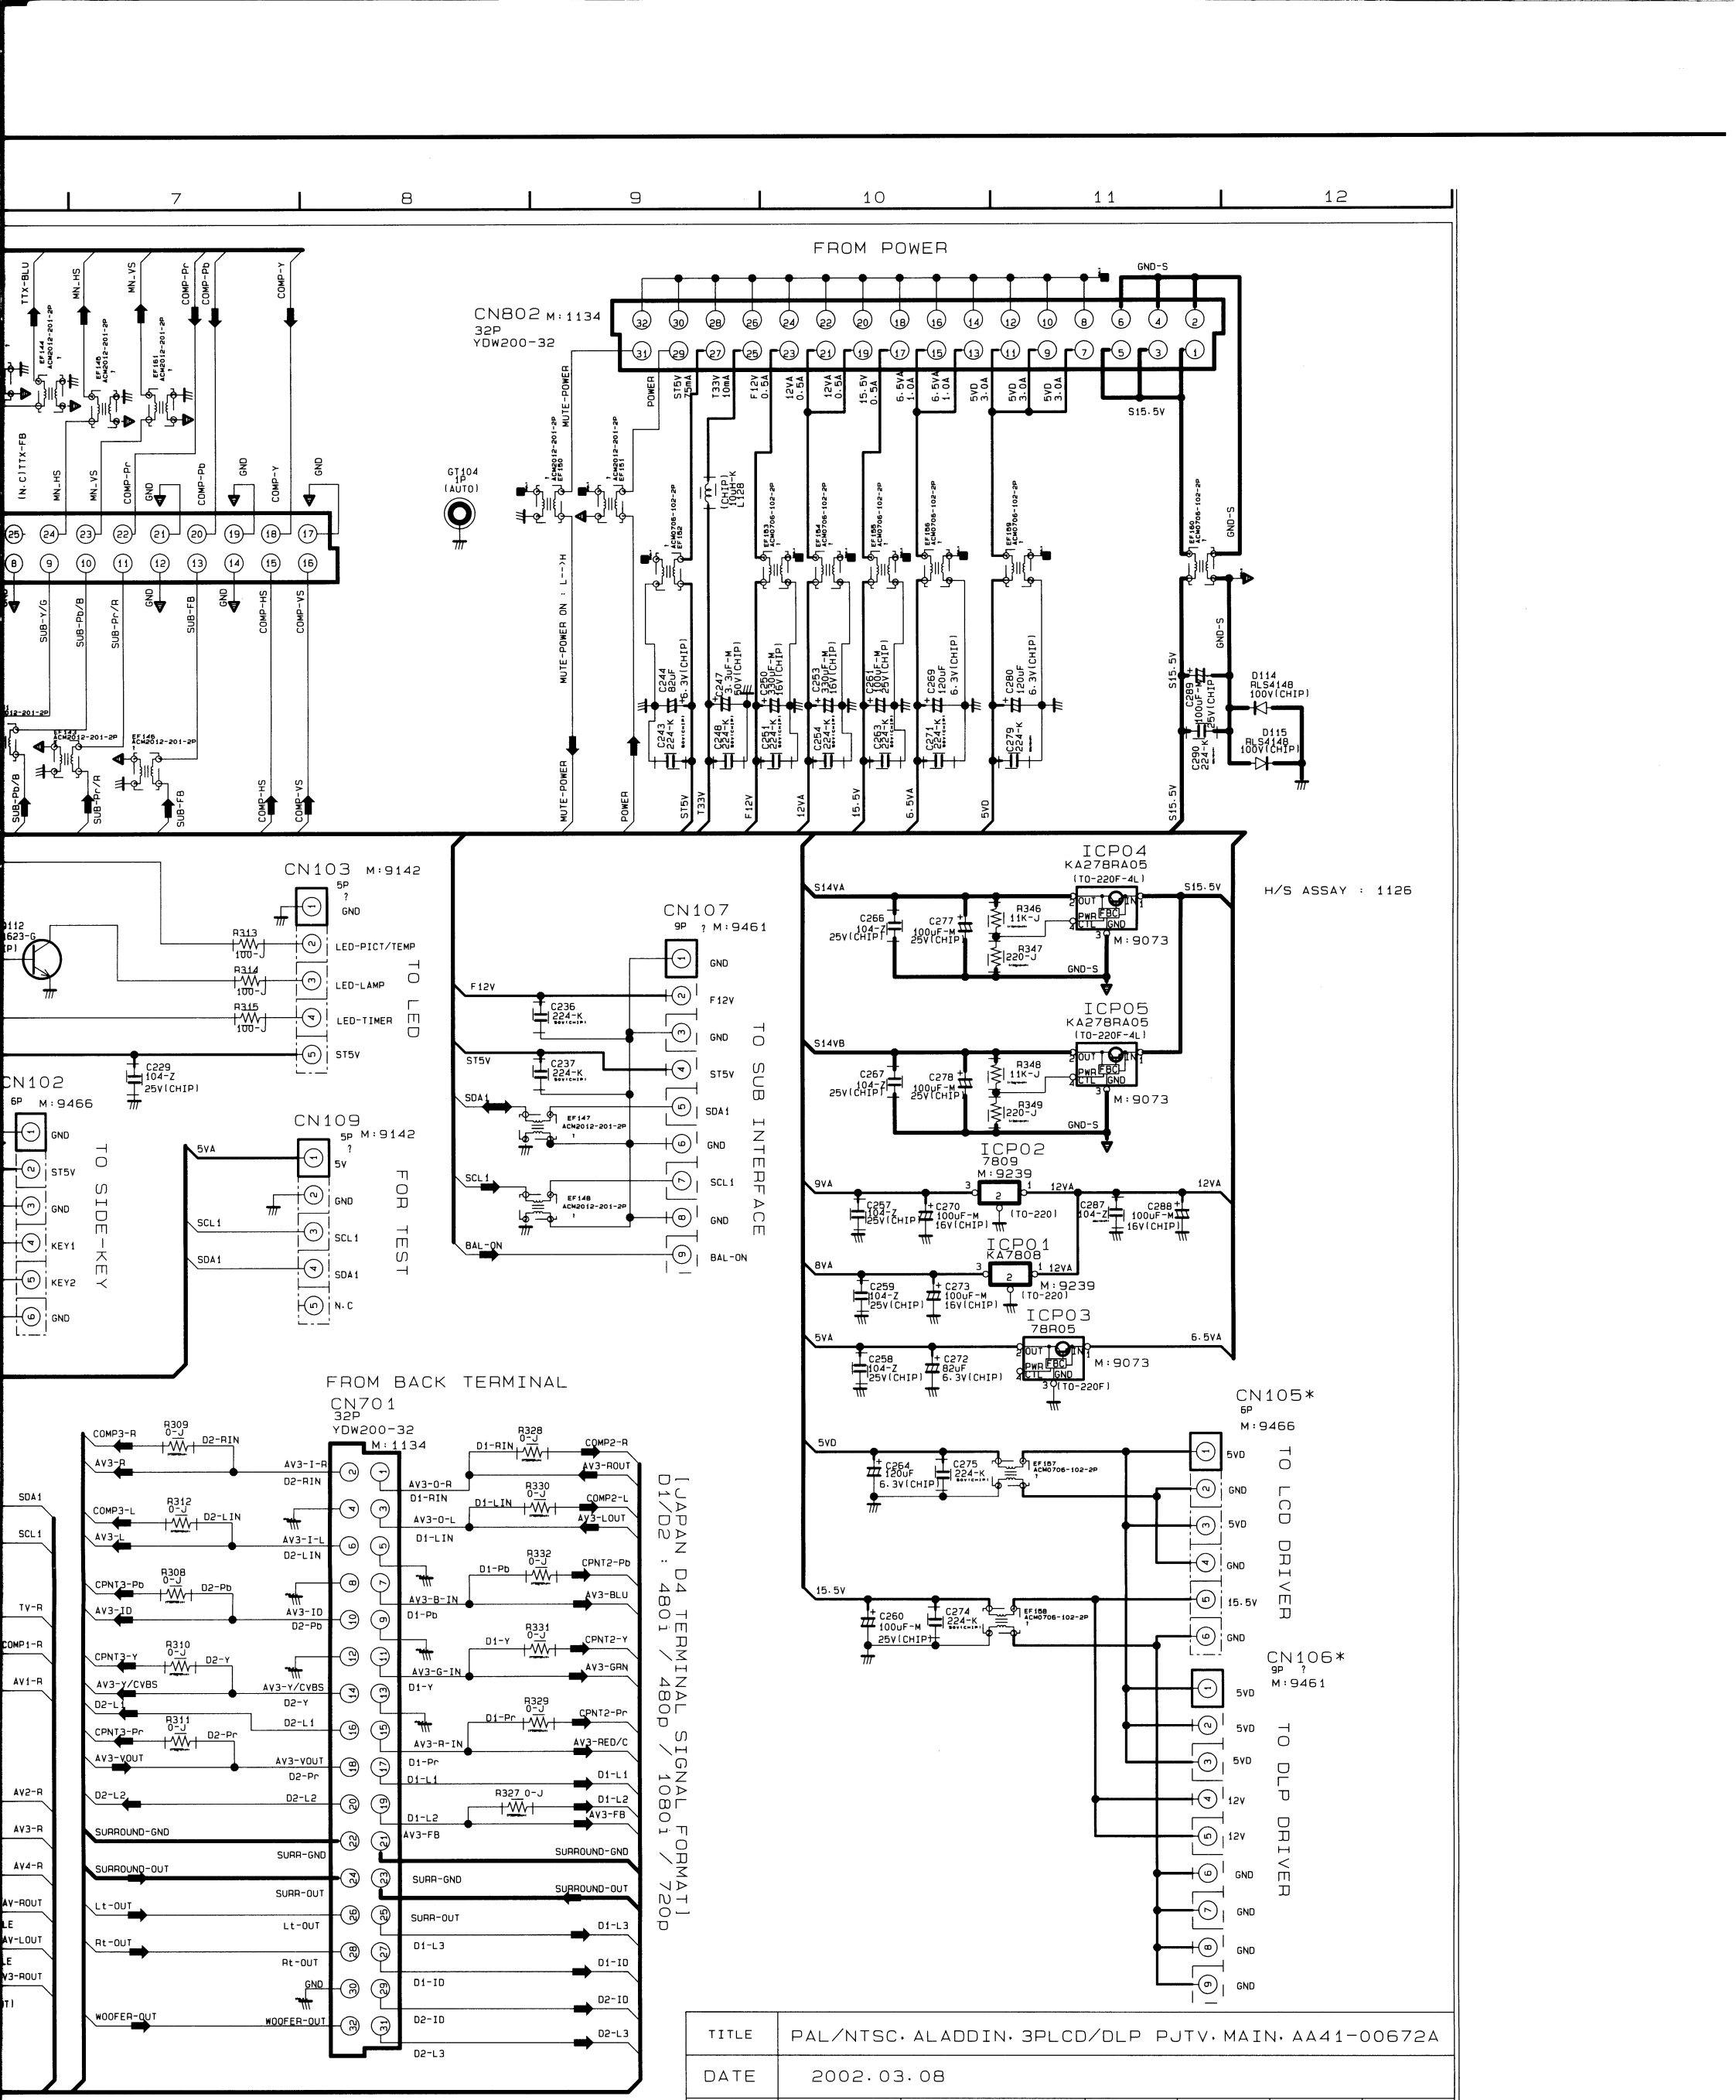
7
8
9
10
11
12
FROM POWER
CN802 M:1134
32P
YDW200-32
GT104
1P
(AUTO)
POWER
ST5V 75mA
T33V 10mA
F12V 0.5A
12VA 0.5A
12VA 0.5A
15.5V 0.5A
6.5VA 1.0A
6.5VA 1.0A
5VD 3.0A
5VD 3.0A
5VD 3.0A
S15.5V
GND-S
MUTE-POWER
MUTE-POWER ON : L-->H
(CHIP) 10uH-K L128
C244 82uF 6.3V(CHIP)
C247 3.3uF-M 50V(CHIP)
C250 330UF-M 16V(CHIP)
C253 330UF-M 16V(CHIP)
C261 330UF-M 16V(CHIP)
C269 120uF 6.3V(CHIP)
C280 120uF 6.3V(CHIP)
C243 224-K
C248 224-K
C251 224-K
C254 224-K
C263 224-K
C271 224-K
C279 224-K
C289 100uF-M 25V(CHIP)
C290 224-K
D114 RLS4148 100V(CHIP)
D115 RLS4148 100V(CHIP)
IN.C TTX-FB
TTX-BLU
MN_HS
MN_VS
COMP-Pr
COMP-Pb
COMP-Y
GND
SUB-Y/G
SUB-Pb/B
SUB-Pr/R
SUB-FB
COMP-HS
COMP-VS
CN103 M:9142
5P
?
LED-PICT/TEMP
LED-LAMP
LED-TIMER
ST5V
R313 100-J
R314 100-J
R315 100-J
C229 104-Z 25V(CHIP)
TO LED
CN102
6P M:9466
GND
ST5V
KEY1
KEY2
TO SIDE-KEY
CN109
5P M:9142
5V
N.C
SCL1
SDA1
FOR TEST
CN107
9P ? M:9461
F12V
BAL-ON
C236 224-K
C237 224-K
TO SUB INTERFACE
ICP04
KA278RA05
(TO-220F-4L)
S14VA
S15.5V
C266 104-Z 25V(CHIP)
C277 100uF-M 25V(CHIP)
R346 11K-J
R347 220-J
M:9073
ICP05
KA278RA05
(TO-220F-4L)
S14VB
C267 104-Z 25V(CHIP)
C278 100uF-M 25V(CHIP)
R348 11K-J
R349 220-J
M:9073
ICP02
7809
M:9239
(TO-220)
9VA
12VA
C257 104-Z 25V(CHIP)
C270 100uF-M 16V(CHIP)
C287 104-Z
C288 100uF-M 16V(CHIP)
ICP01
KA7808
M:9239
(TO-220)
8VA
C259 104-Z 25V(CHIP)
C273 100uF-M 16V(CHIP)
ICP03
78R05
M:9073
(TO-220F)
5VA
6.5VA
C258 104-Z 25V(CHIP)
C272 82uF 6.3V(CHIP)
H/S ASSAY : 1126
CN105*
6P
M:9466
5VD
GND
15.5V
C264 120uF 6.3V(CHIP)
C275 224-K
C260 100uF-M 25V(CHIP)
C274 224-K
TO LCD DRIVER
CN106*
9P ?
M:9461
5VD
12V
GND
TO DLP DRIVER
FROM BACK TERMINAL
CN701
32P
YDW200-32
M:1134
COMP3-R
AV3-R
COMP3-L
AV3-L
CPNT3-Pb
AV3-ID
CPNT3-Y
AV3-Y/CVBS
CPNT3-Pr
AV3-VOUT
D2-L2
SURROUND-GND
SURROUND-OUT
Lt-OUT
Rt-OUT
GND
WOOFER-OUT
R309 0-J
R312 0-J
R308 0-J
R310 0-J
R311 0-J
D2-RIN
D2-LIN
D2-Pb
D2-Y
D2-Pr
D2-L1
D2-L2
AV3-I-R
AV3-I-L
AV3-ID
AV3-Y/CVBS
AV3-VOUT
SURR-GND
SURR-OUT
R328 0-J
R330 0-J
R332 0-J
R331 0-J
R329 0-J
R327 0-J
COMP2-R
COMP2-L
CPNT2-Pb
CPNT2-Y
CPNT2-Pr
D1-RIN
D1-LIN
D1-Pb
D1-Y
D1-Pr
D1-L1
D1-L2
D1-L3
D1-ID
D2-ID
AV3-O-R
AV3-O-L
AV3-B-IN
AV3-G-IN
AV3-R-IN
AV3-FB
AV3-ROUT
AV3-LOUT
AV3-BLU
AV3-GRN
AV3-RED/C
[JAPAN D4 TERMINAL SIGNAL FORMAT]
D1/D2 : 480i / 480p / 1080i / 720p
SDA1
SCL1
TV-R
COMP1-R
AV1-R
AV2-R
AV3-R
AV4-R
AV-ROUT
AV-LOUT
TITLE
PAL/NTSC. ALADDIN. 3PLCD/DLP PJTV. MAIN. AA41-00672A
DATE
2002.03.08
SAMSUNG
Doc. CODE
DS020123-0017
Rev. No
SHEET NO
/

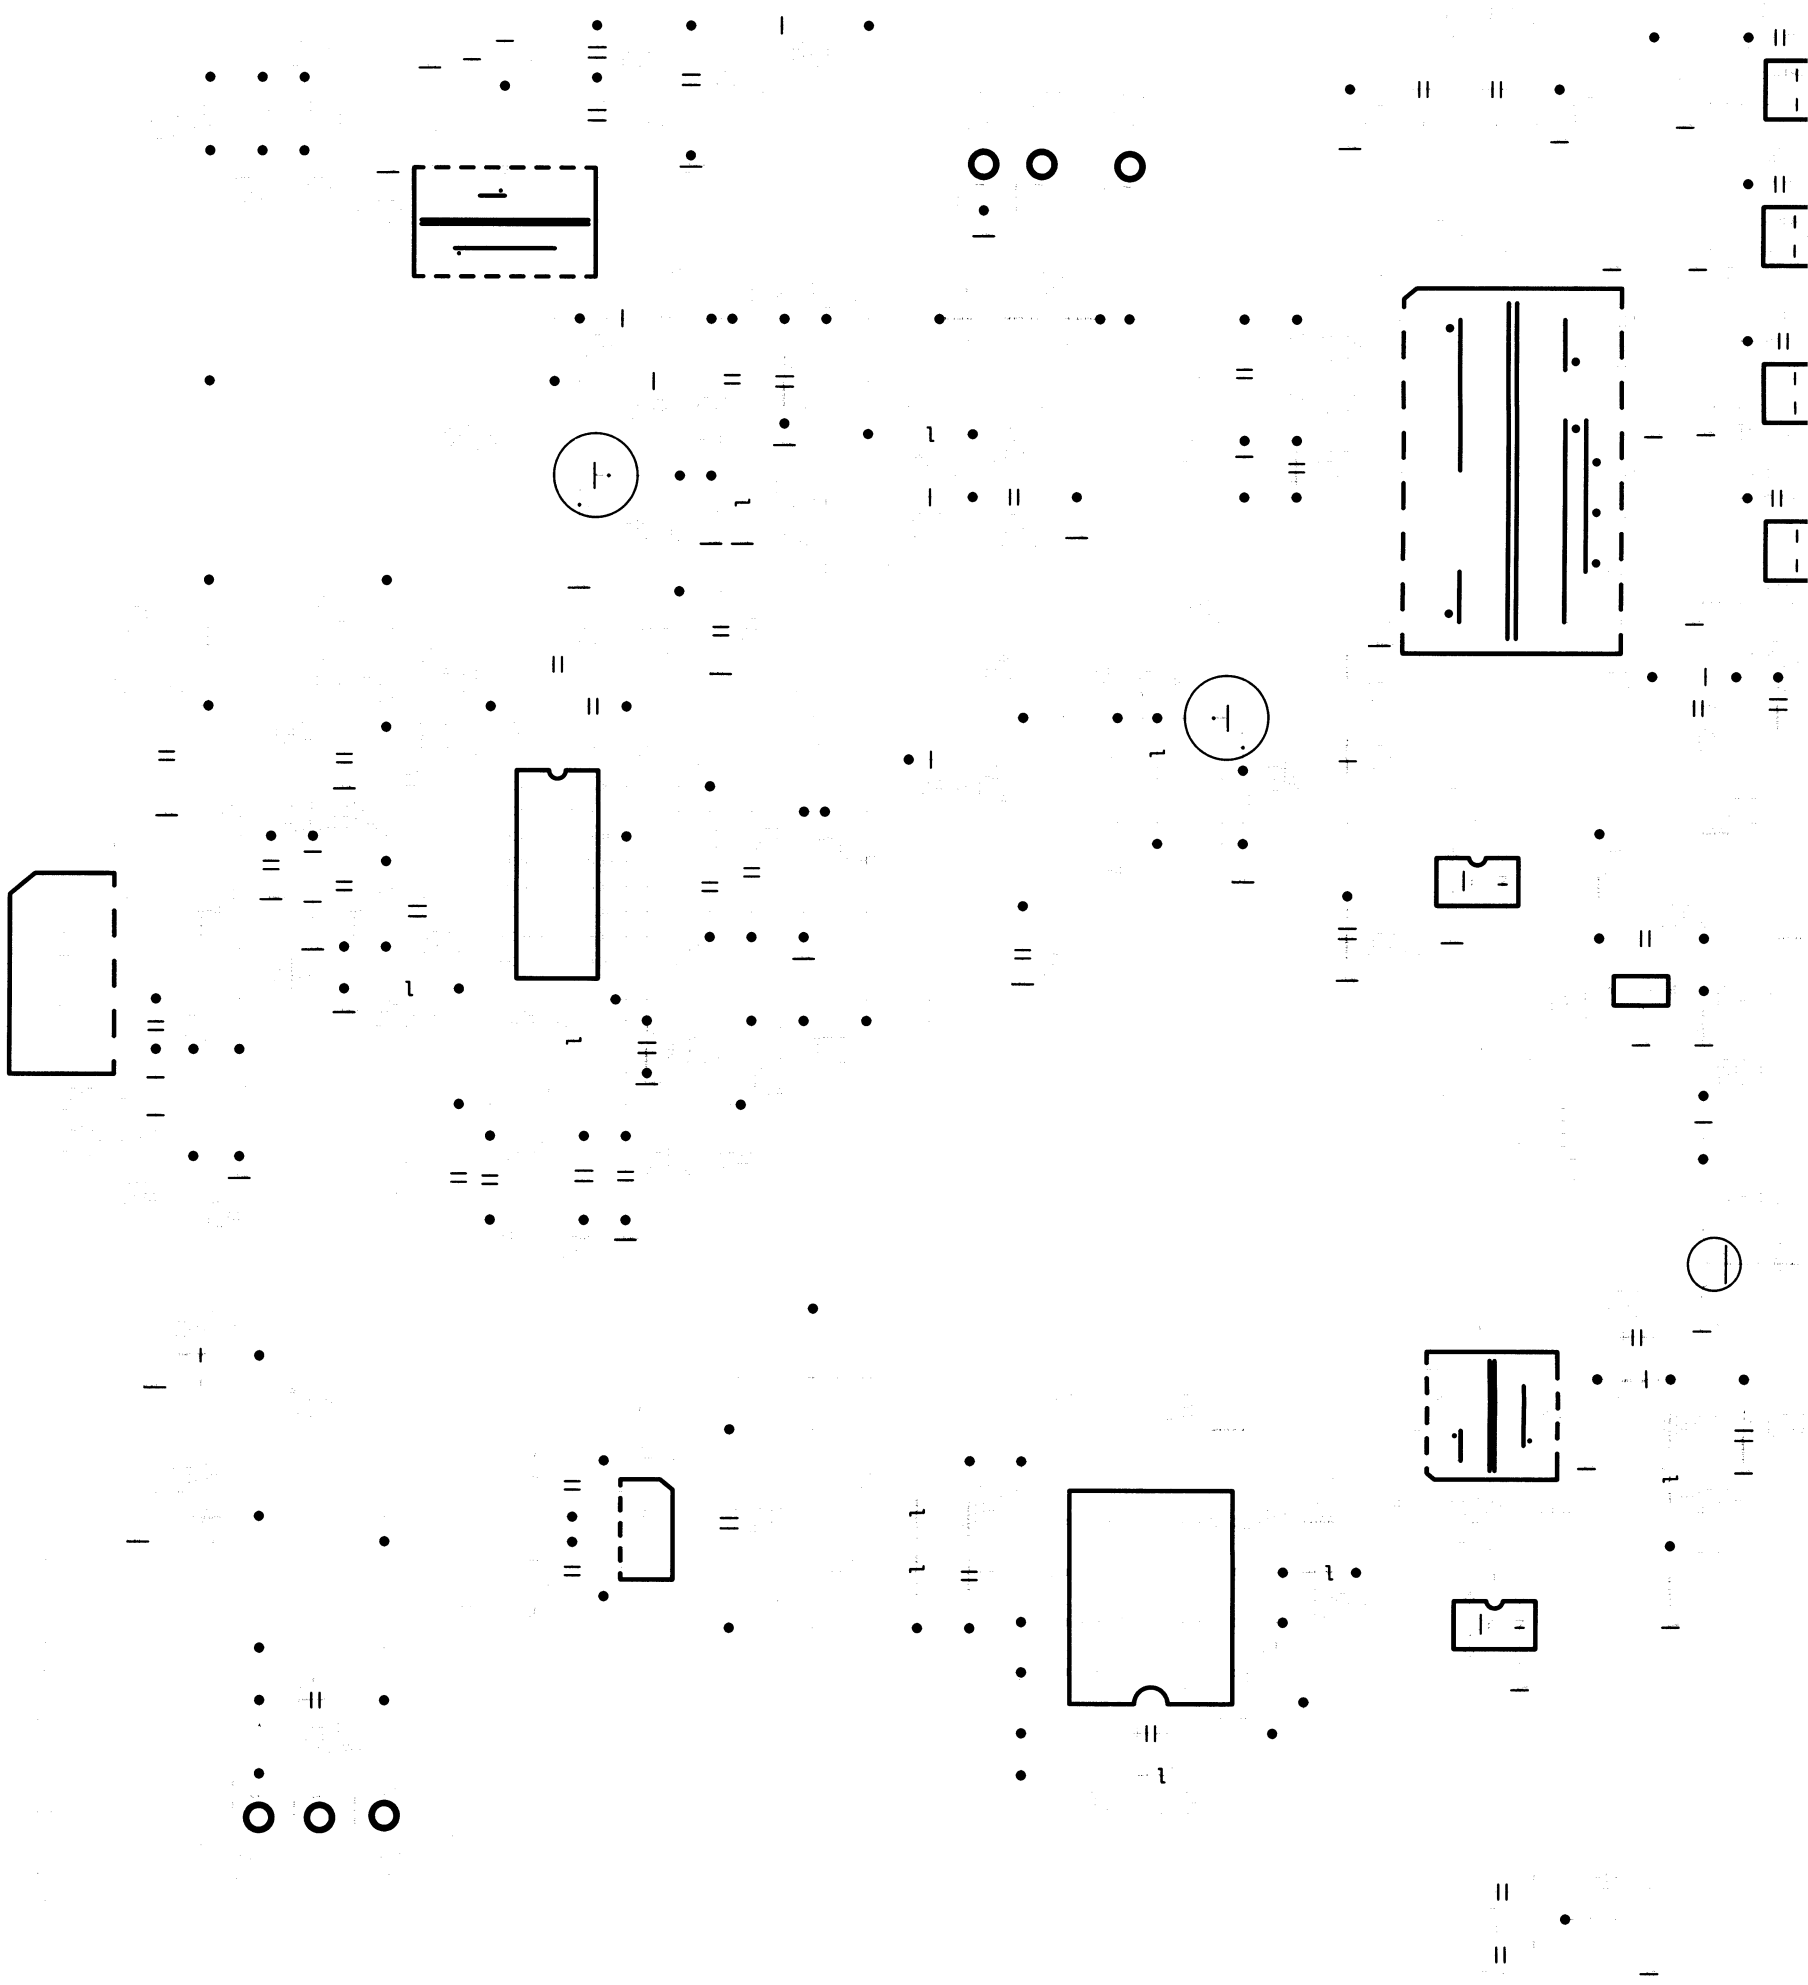

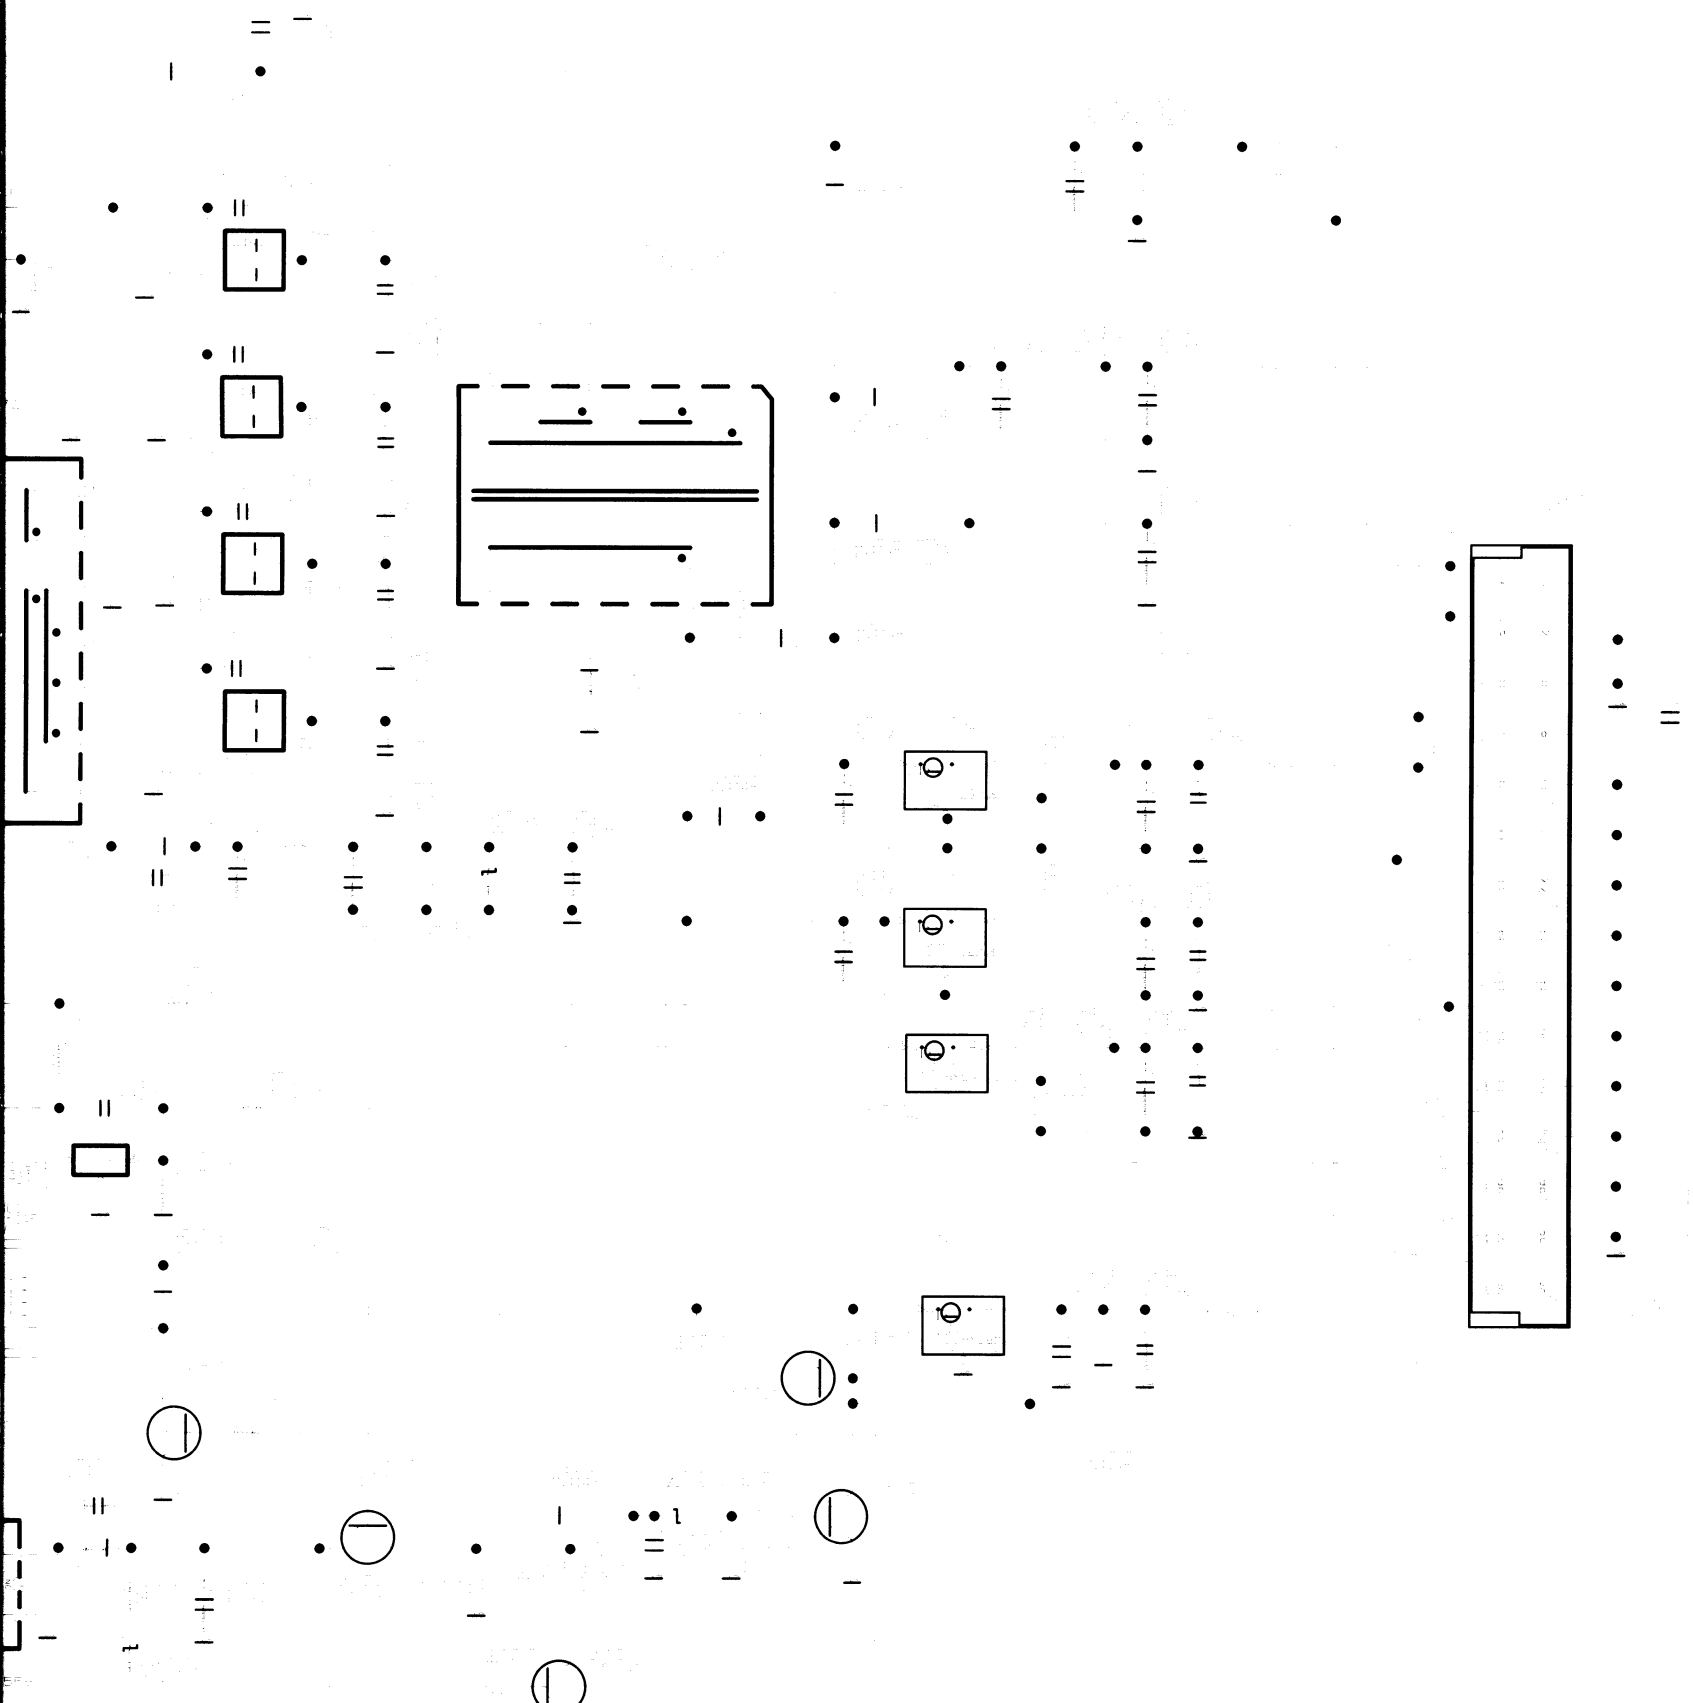

5-6 LCD DRIVER-1

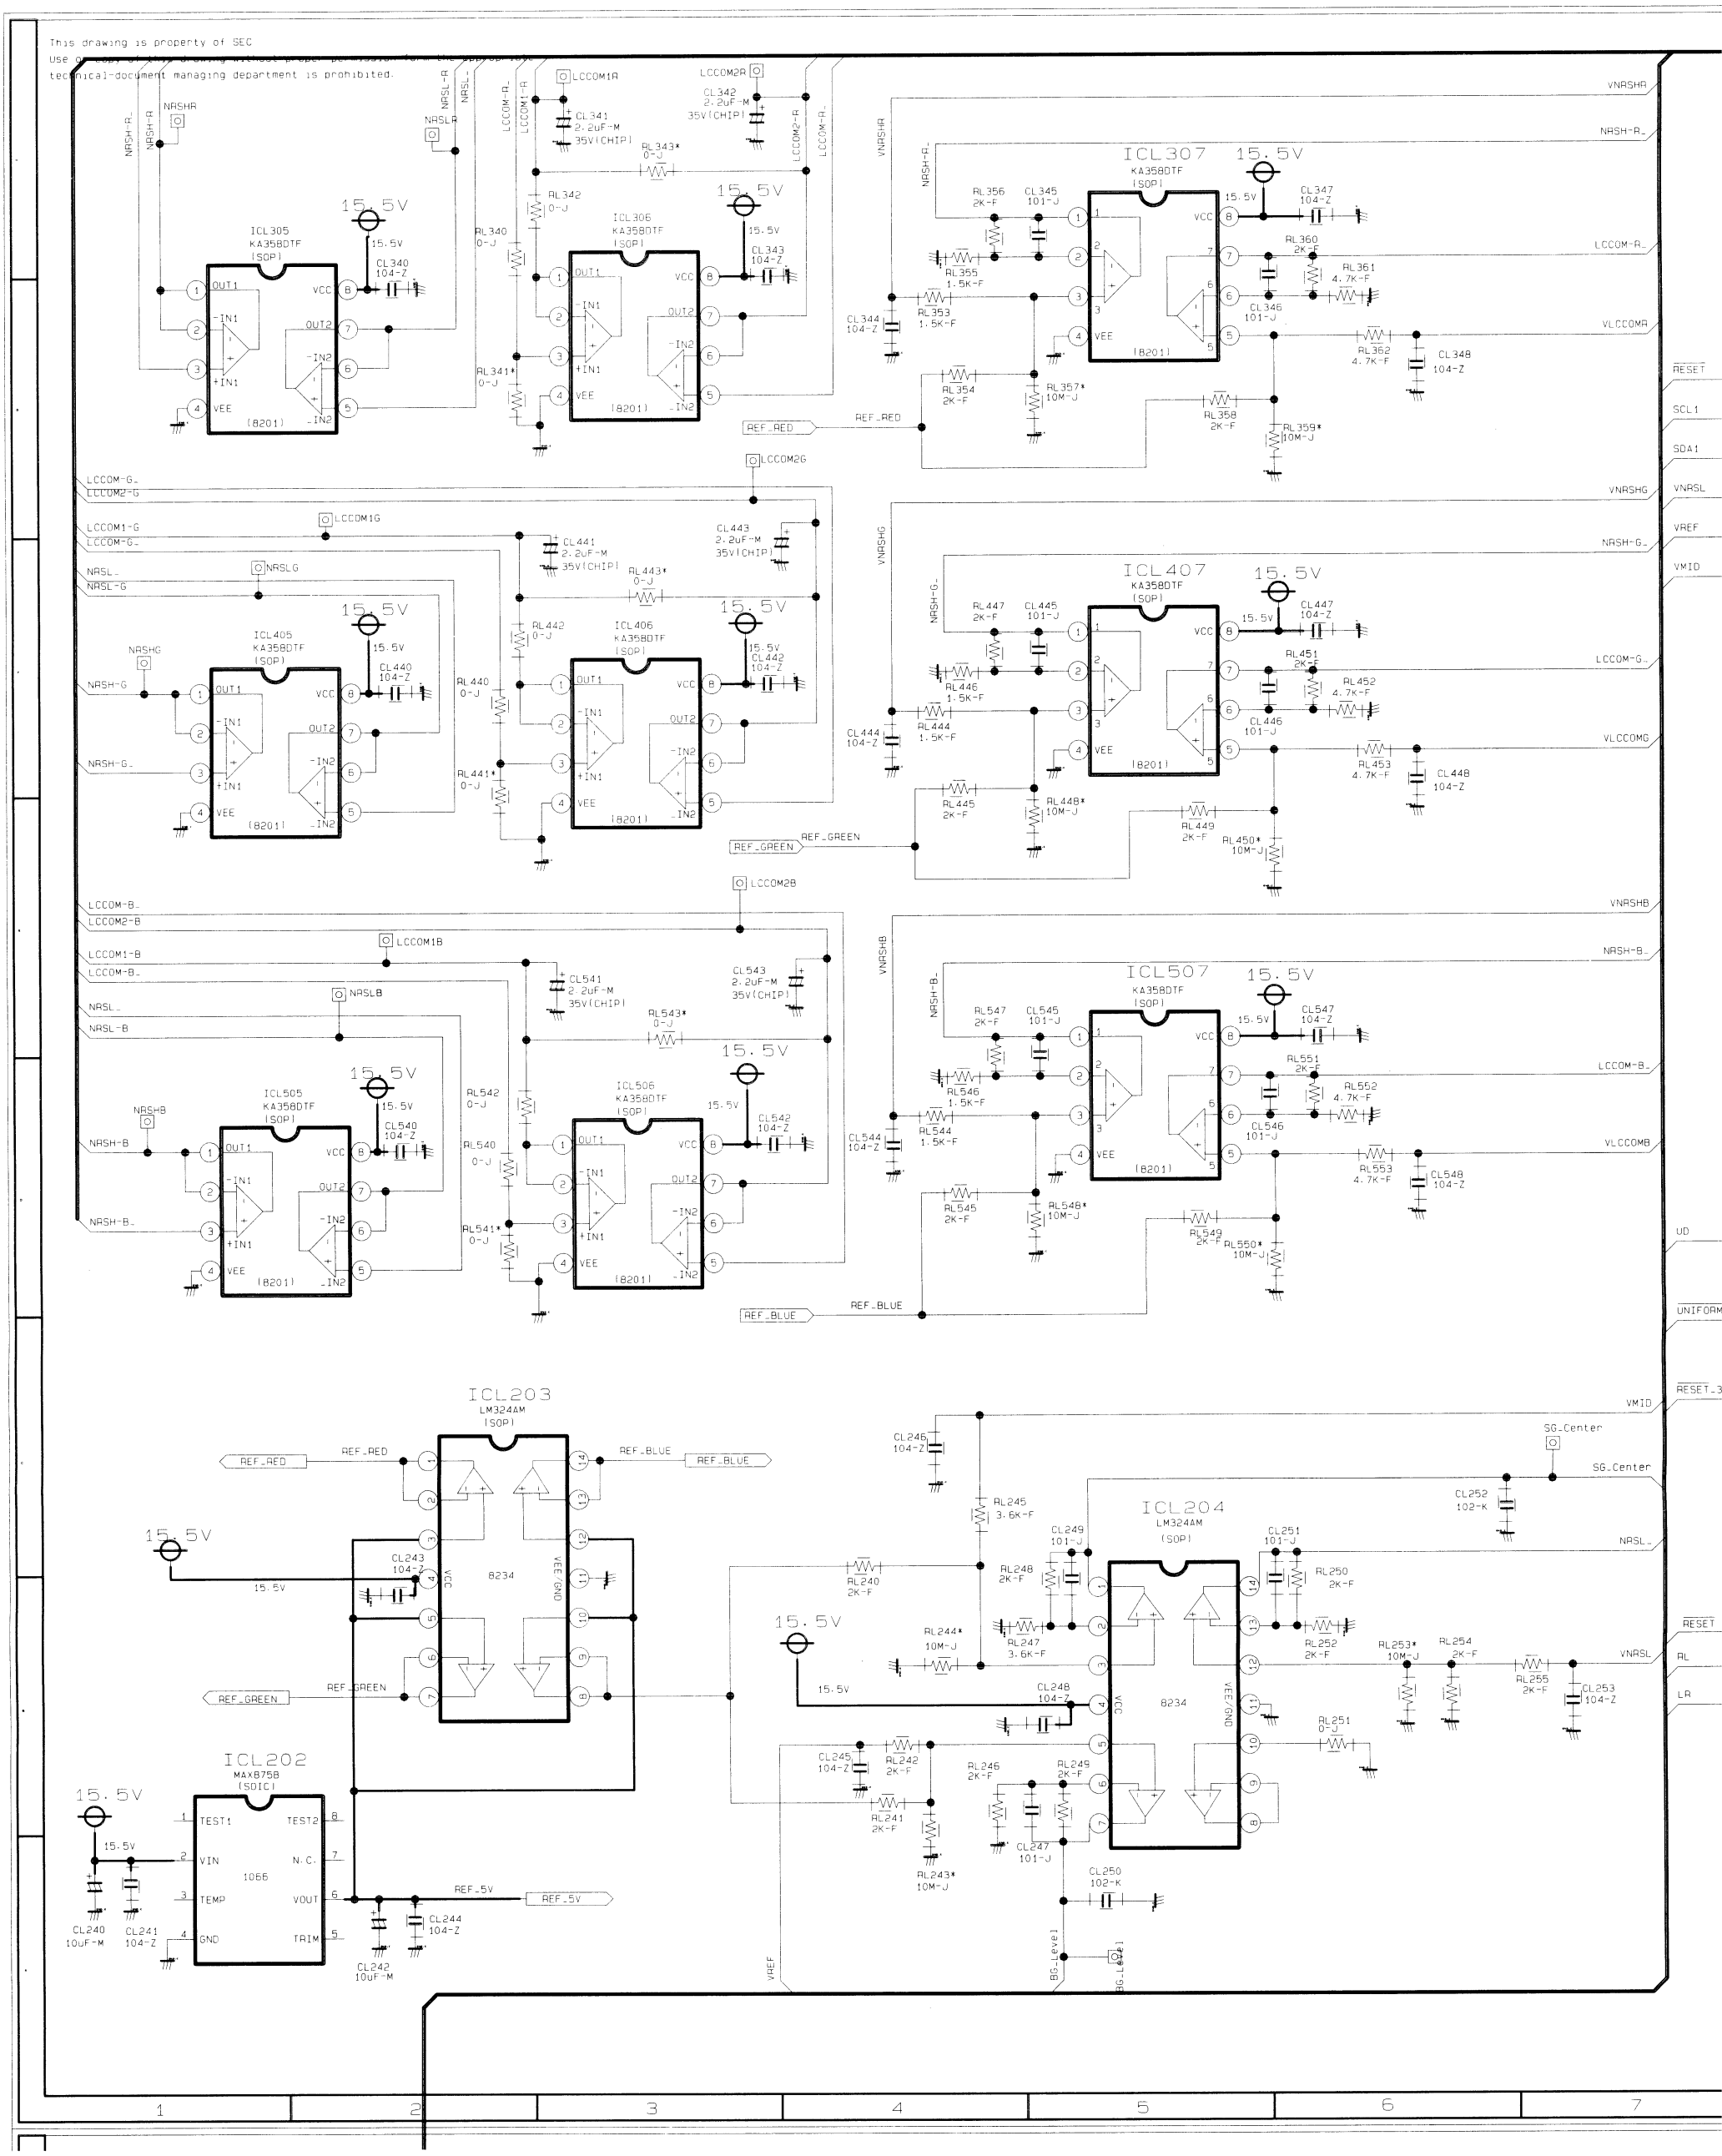

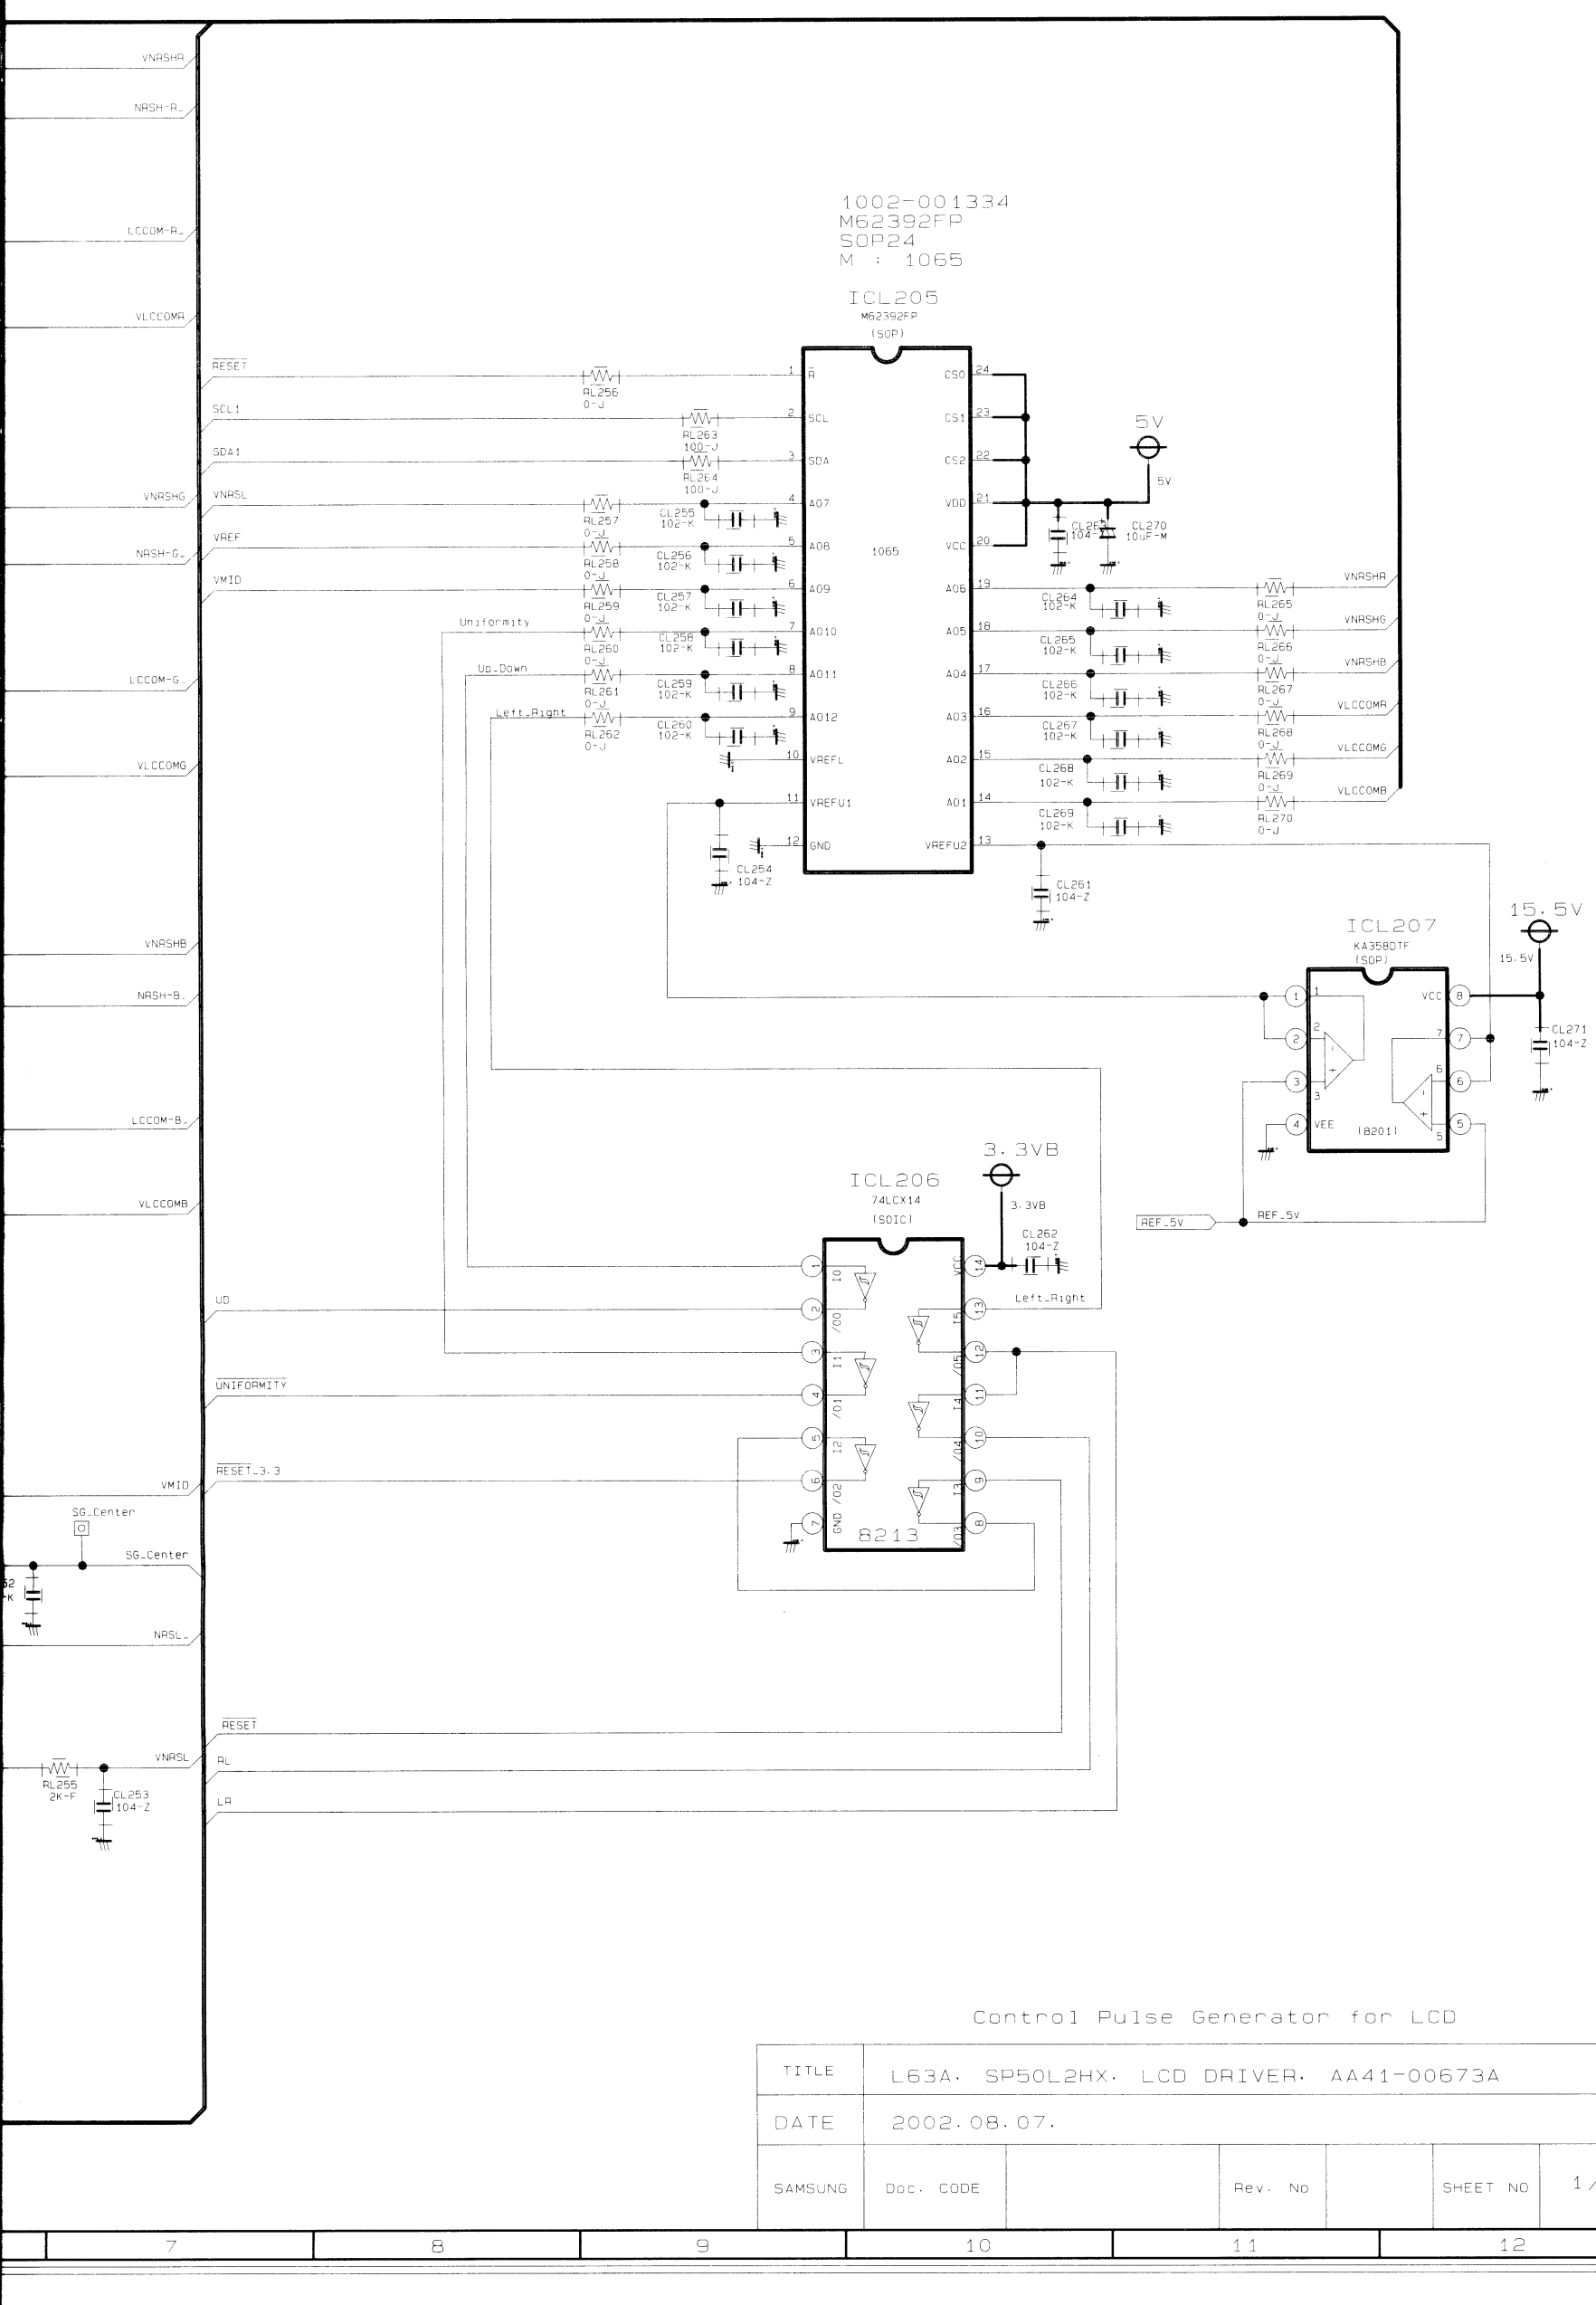

Control Pulse Generator for LCD

TITLE	L63A, SP50L2HX, LCD DRIVER, AA41-00673A					
DATE	2002.08.07.					
SAMSUNG	Doc. CODE		Rev. No		SHEET NO	1/6

7 | 8 | 9 | 10 | 11 | 12

5-7 LCD DRIVER-2

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

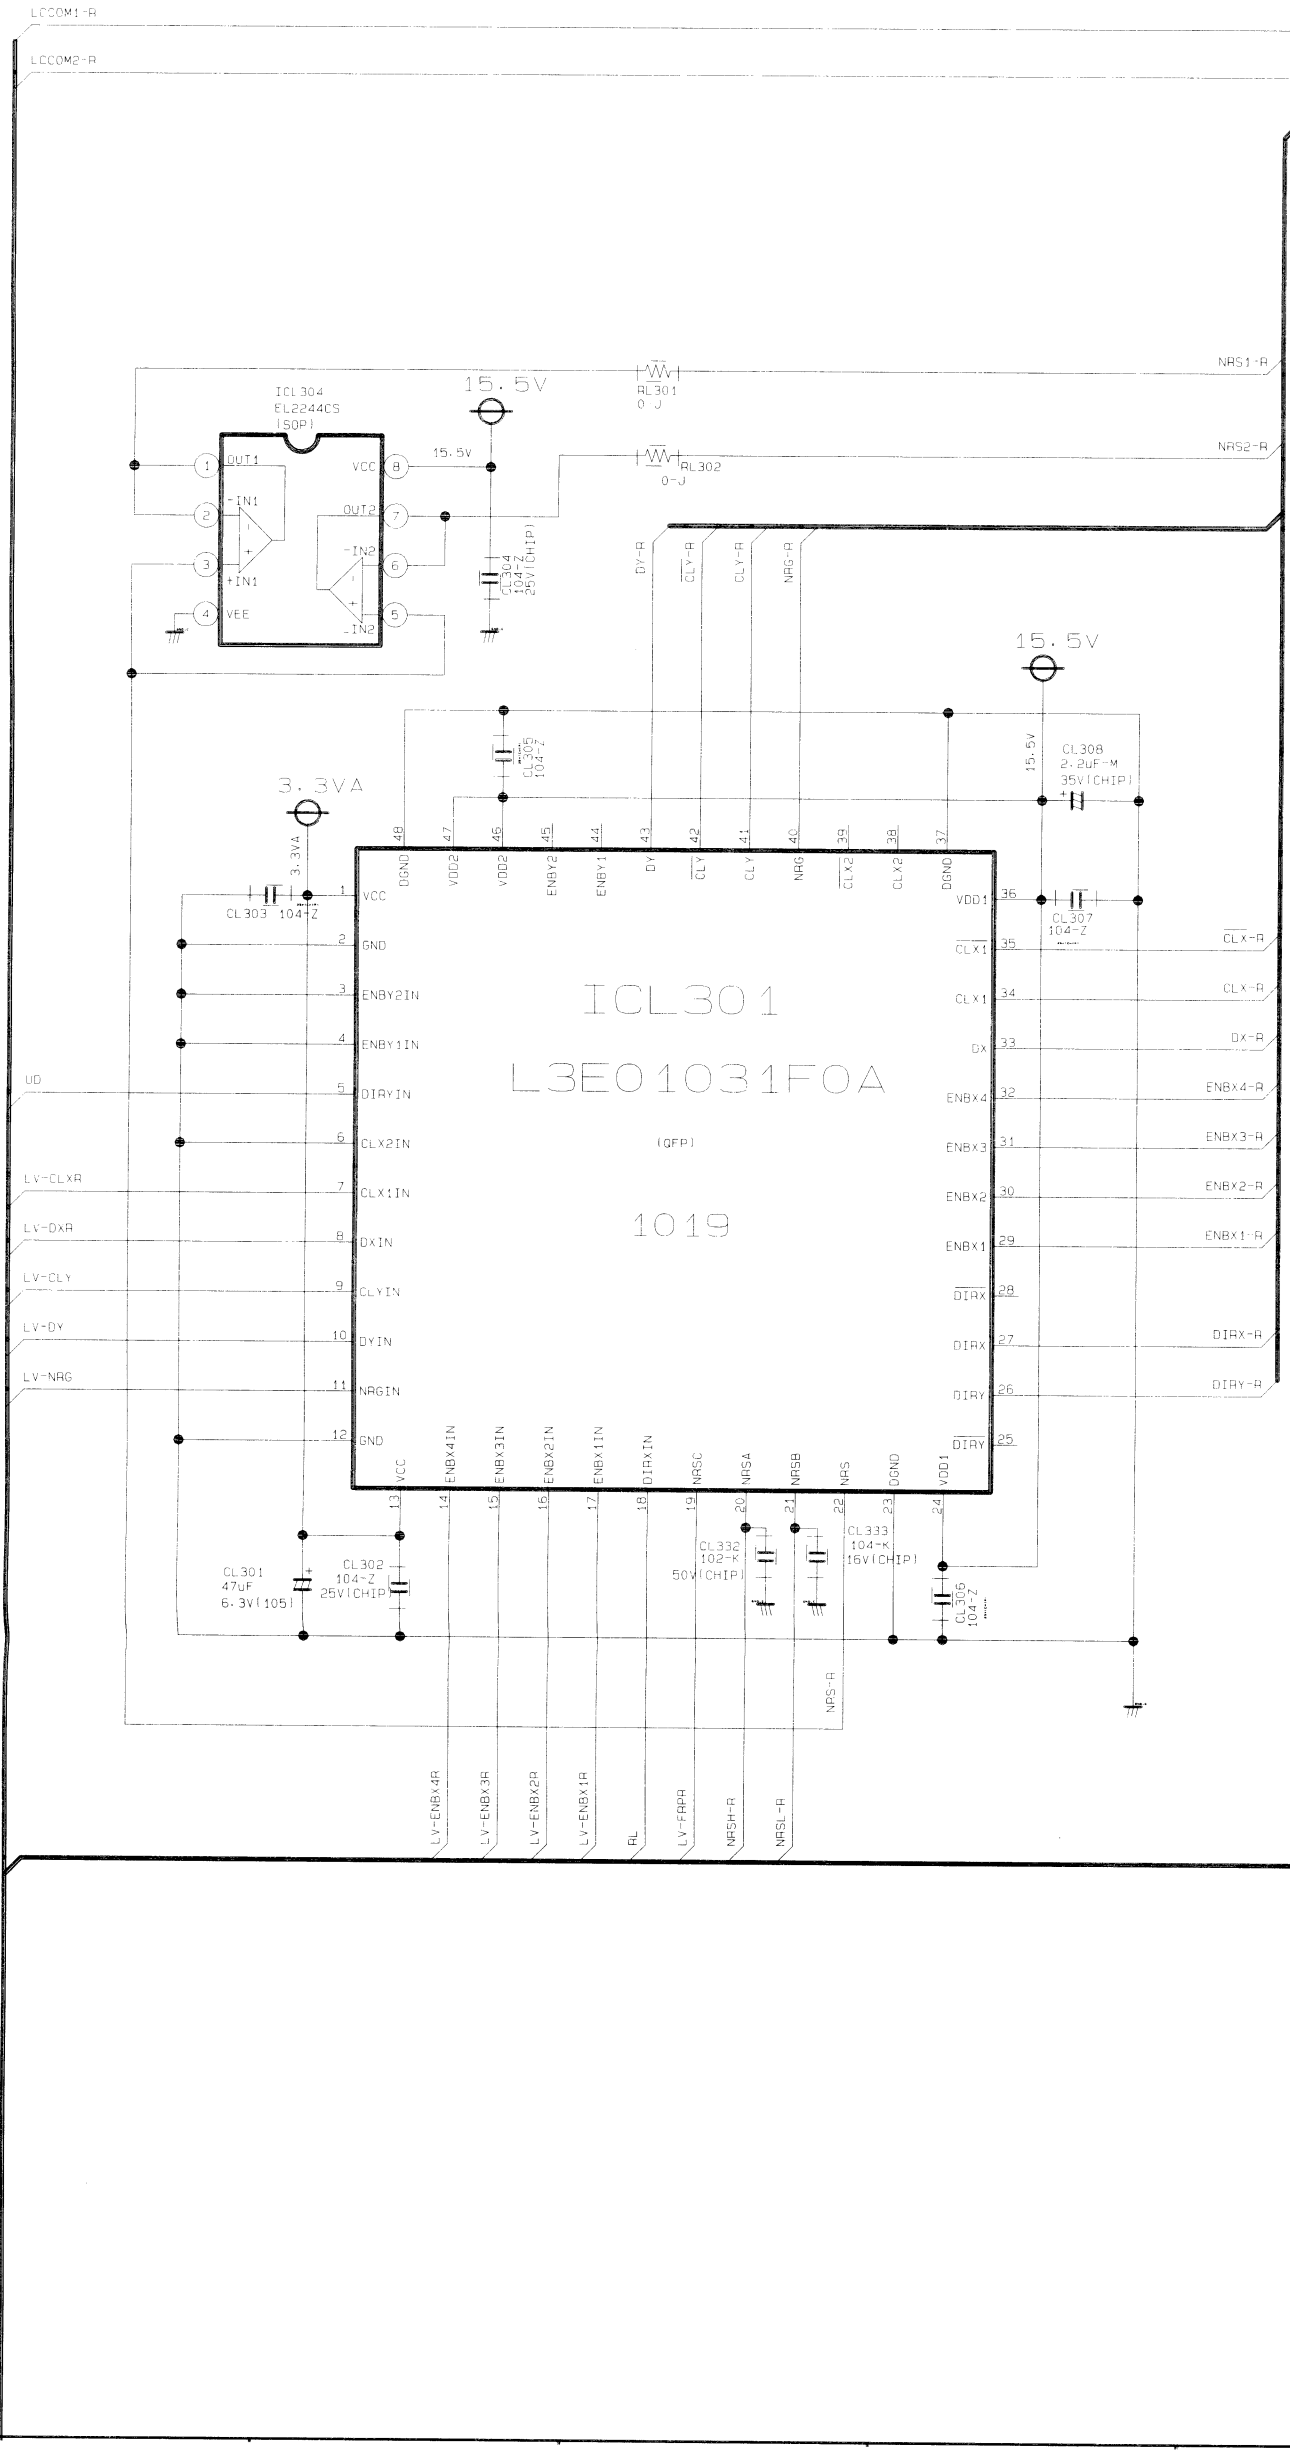

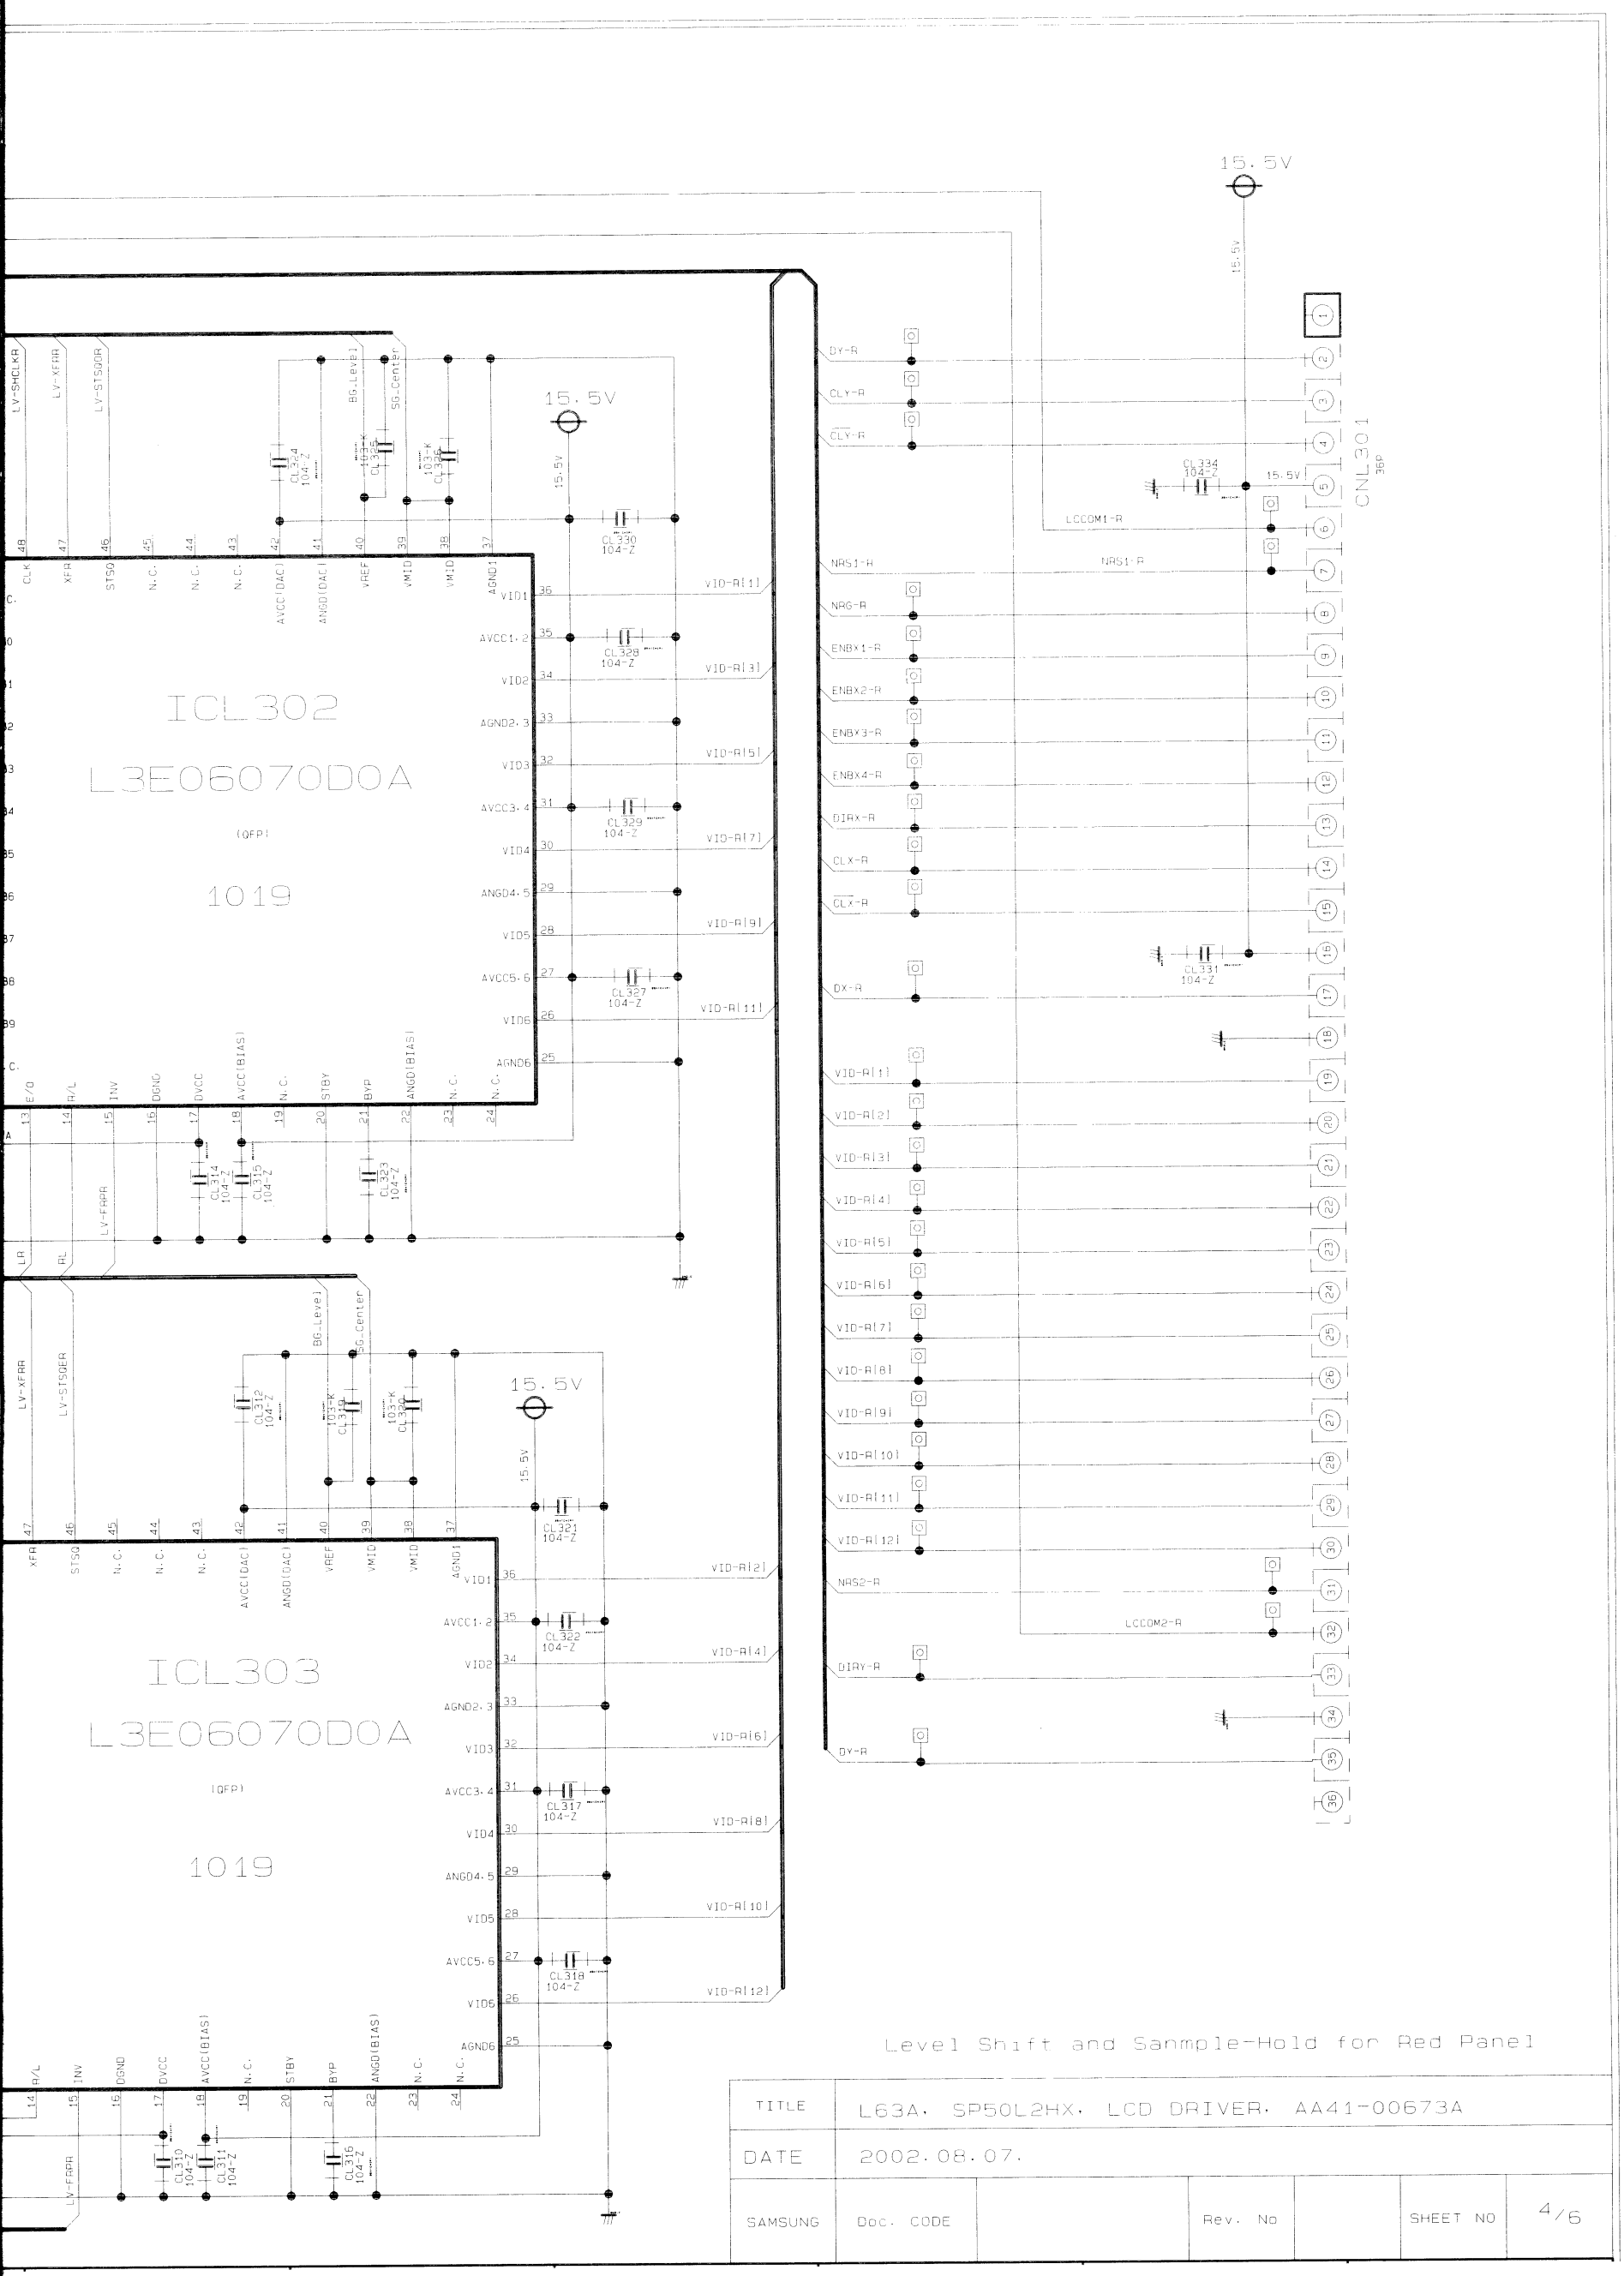
15.5V
CNL301
36P
ICL302
L3E06070D0A
(QFP)
1019
ICL303
L3E06070D0A
(QFP)
1019
LV-SHCLKR
LV-XFRR
LV-ST5QDR
LV-FRPR
LV-XFRR
LV-ST5QER
LV-FRPR
BG-Level
SG-Center
DY-R
CLY-R
CLY-R
LCCOM1-R
NAS1-R
NRG-R
ENBX1-R
ENBX2-R
ENBX3-R
ENBX4-R
DIAX-R
CLX-R
CLX-R
DX-R
DIAY-R
DY-R
NAS2-R
LCCOM2-R
VID-R[1]
VID-R[2]
VID-R[3]
VID-R[4]
VID-R[5]
VID-R[6]
VID-R[7]
VID-R[8]
VID-R[9]
VID-R[10]
VID-R[11]
VID-R[12]
Level Shift and Sanmple-Hold for Red Panel
TITLE
L63A, SP50L2HX, LCD DRIVER, AA41-00673A
DATE
2002.08.07.
SAMSUNG
Doc. CODE
Rev. No
SHEET NO
4/6

5-8 LCD DRIVER-3

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

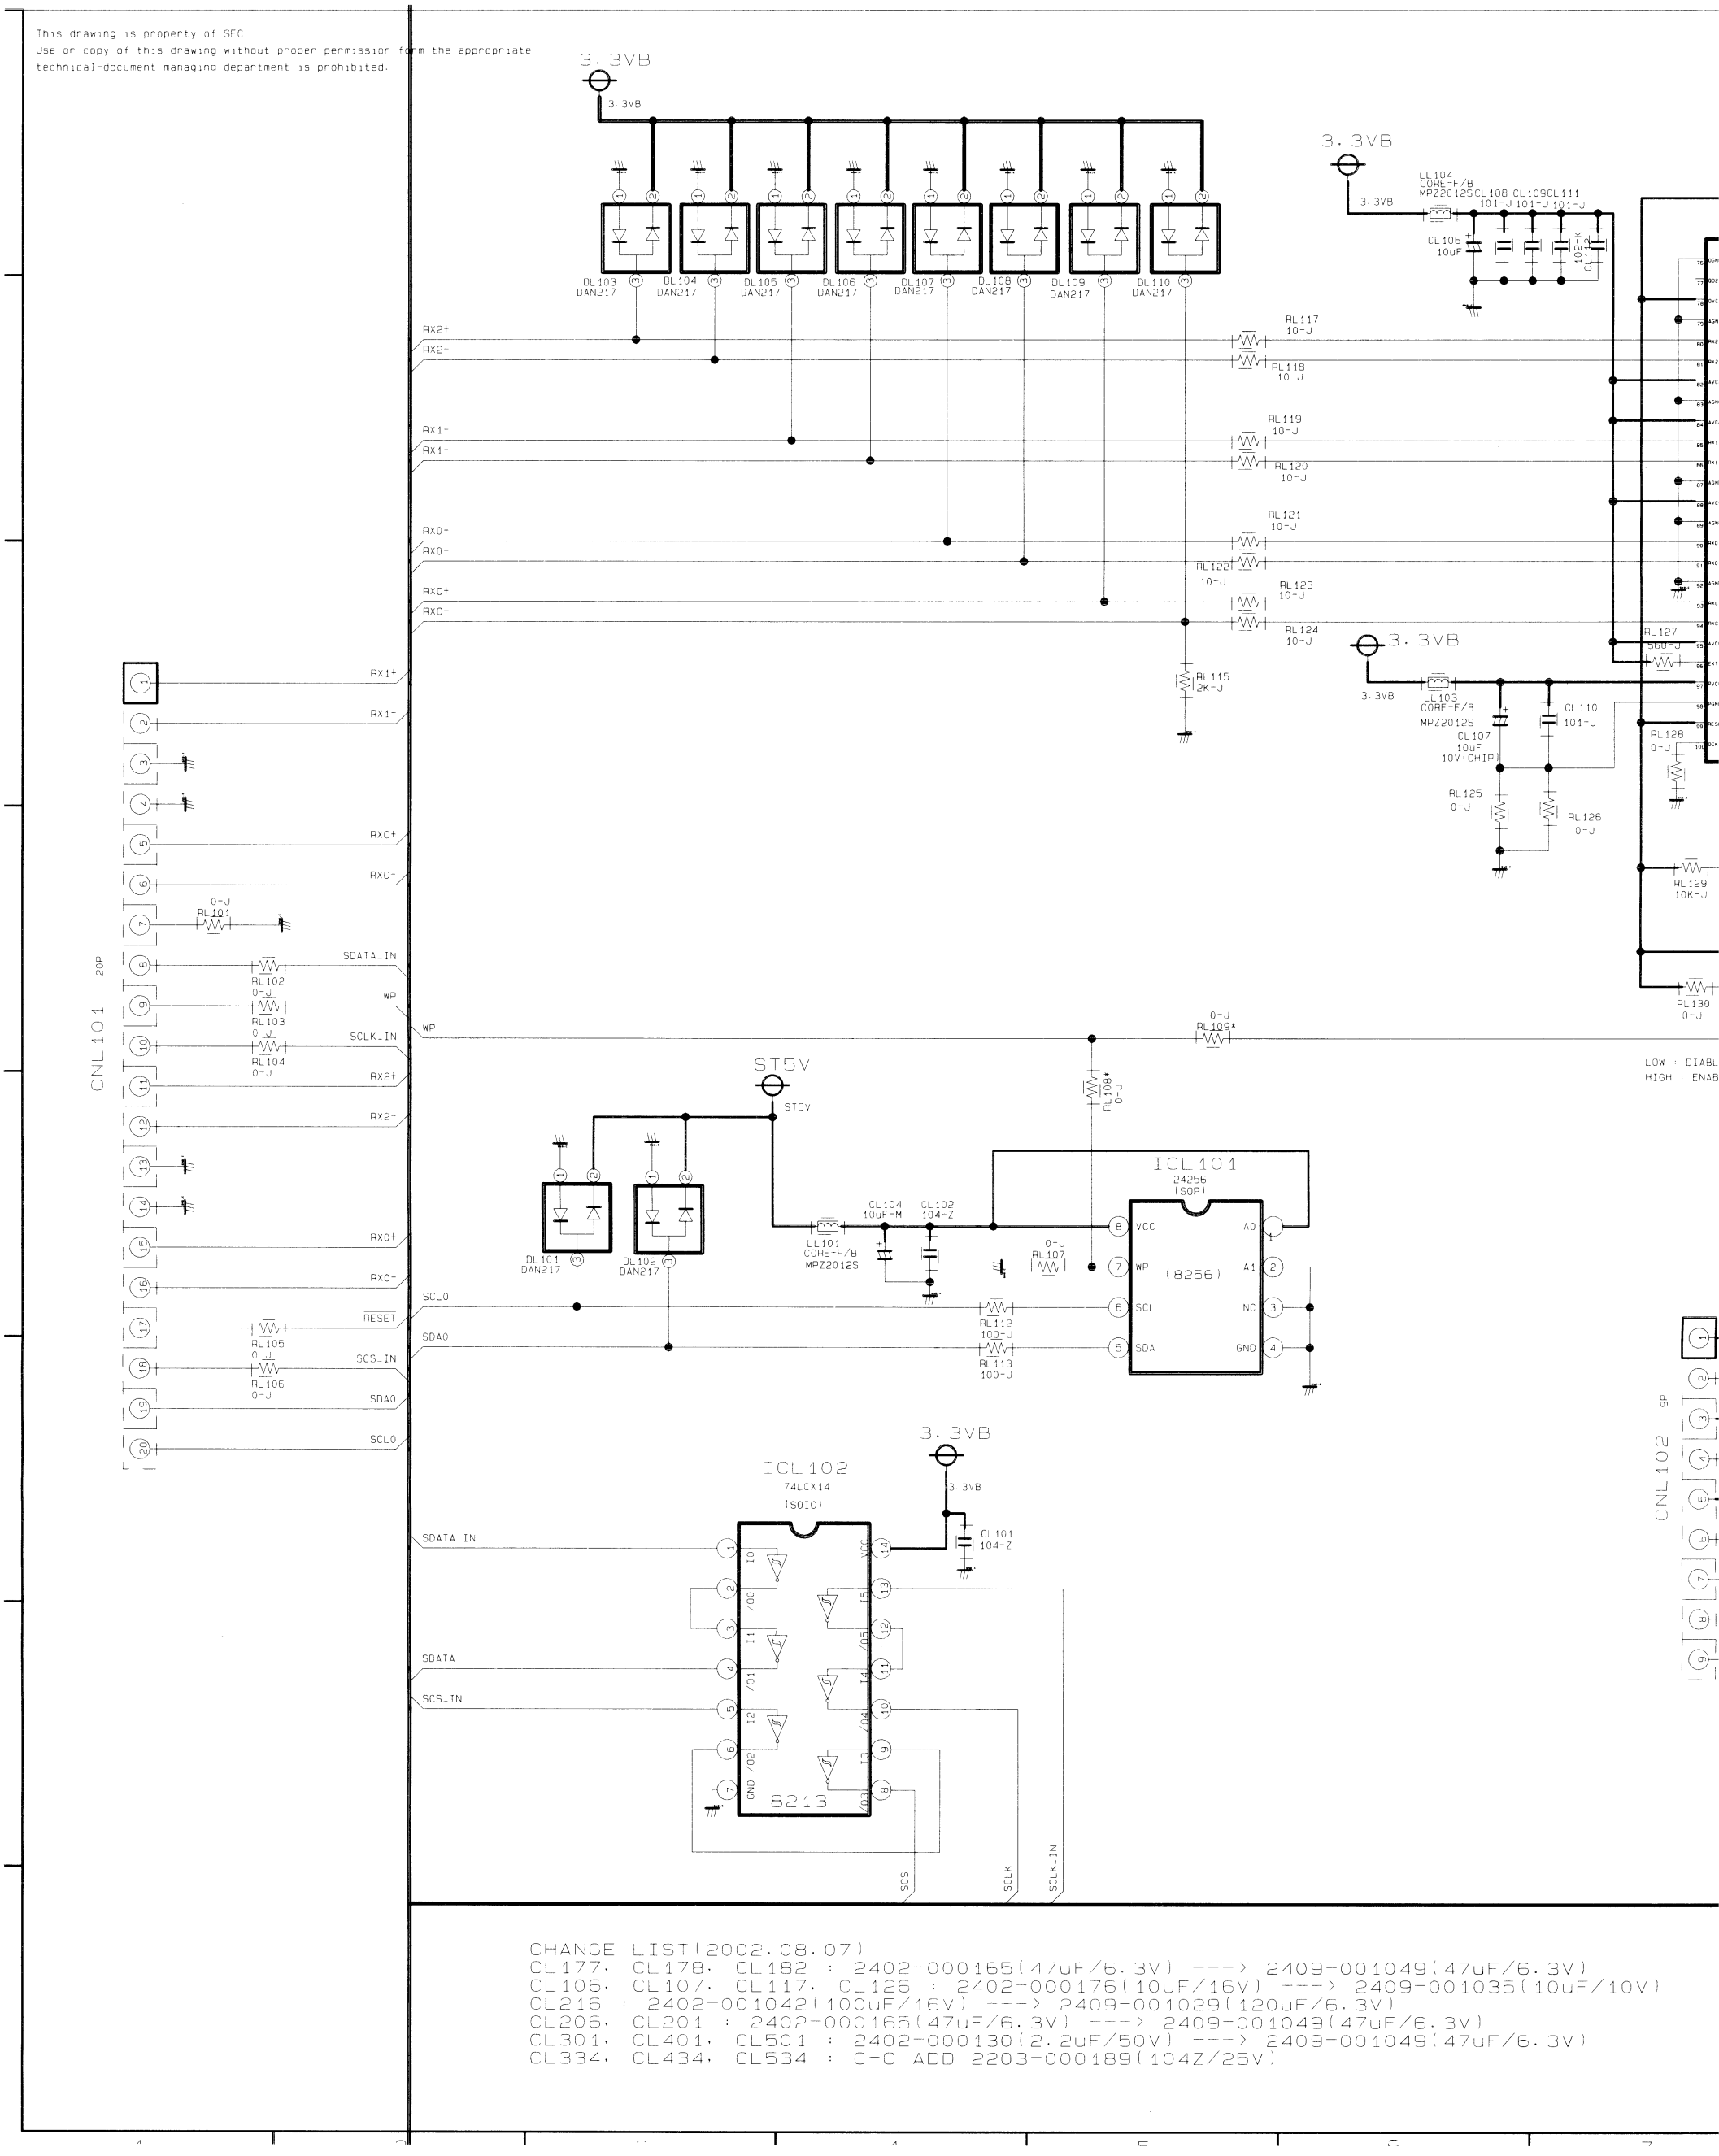

CHANGE LIST(2002.08.07)
CL177, CL178, CL182 : 2402-000165(47uF/6.3V) ---> 2409-001049(47uF/6.3V)
CL106, CL107, CL117, CL126 : 2402-000176(10uF/16V) ---> 2409-001035(10uF/10V)
CL216 : 2402-001042(100uF/16V) ---> 2409-001029(120uF/6.3V)
CL206, CL201 : 2402-000165(47uF/6.3V) ---> 2409-001049(47uF/6.3V)
CL301, CL401, CL501 : 2402-000130(2.2uF/50V) ---> 2409-001049(47uF/6.3V)
CL334, CL434, CL534 : C-C ADD 2203-000189(104Z/25V)

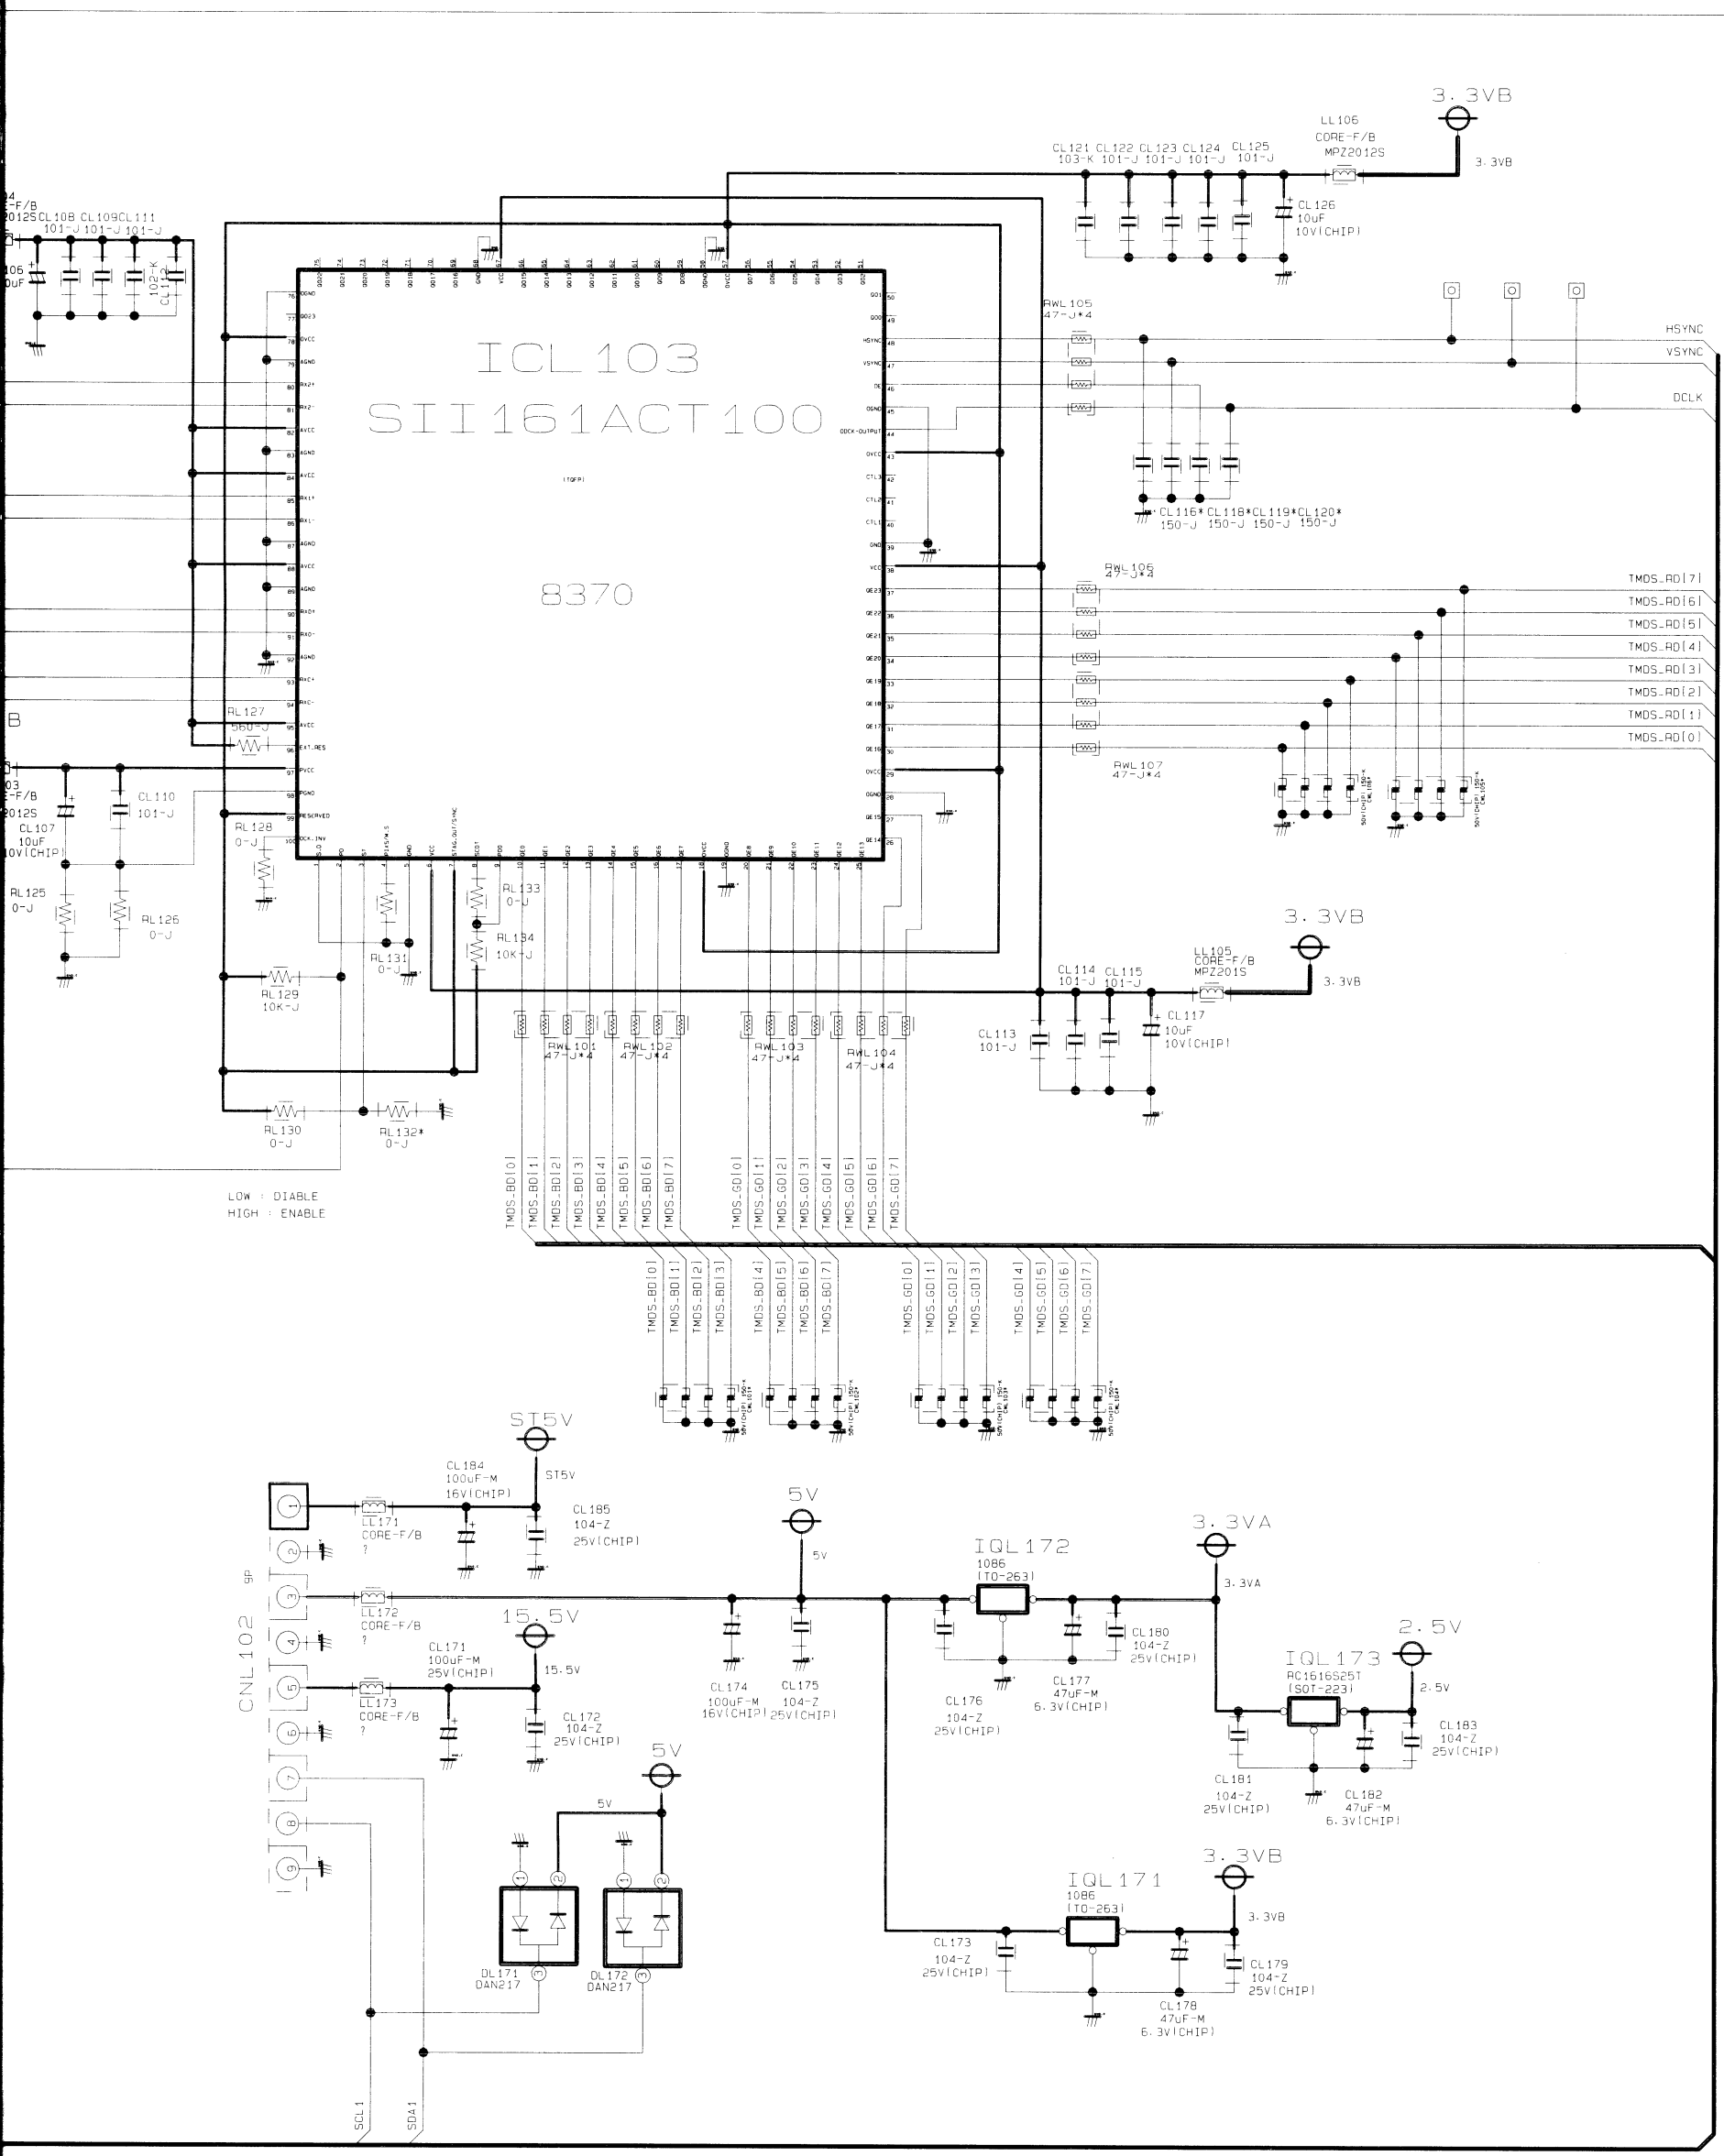

47uF/6.3V)
01035(10uF/10V)

3V)
47uF/6.3V)

TMDS INPUT. EEPROM and POWER

TITLE	L63A. SP50L2HX. LCD DRIVER. AA41-00673A					
DATE	2002.08.07.					
SAMSUNG	Doc. CODE		Rev. No		SHEET NO	2/6

This drawing is property of SEC
Use of copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

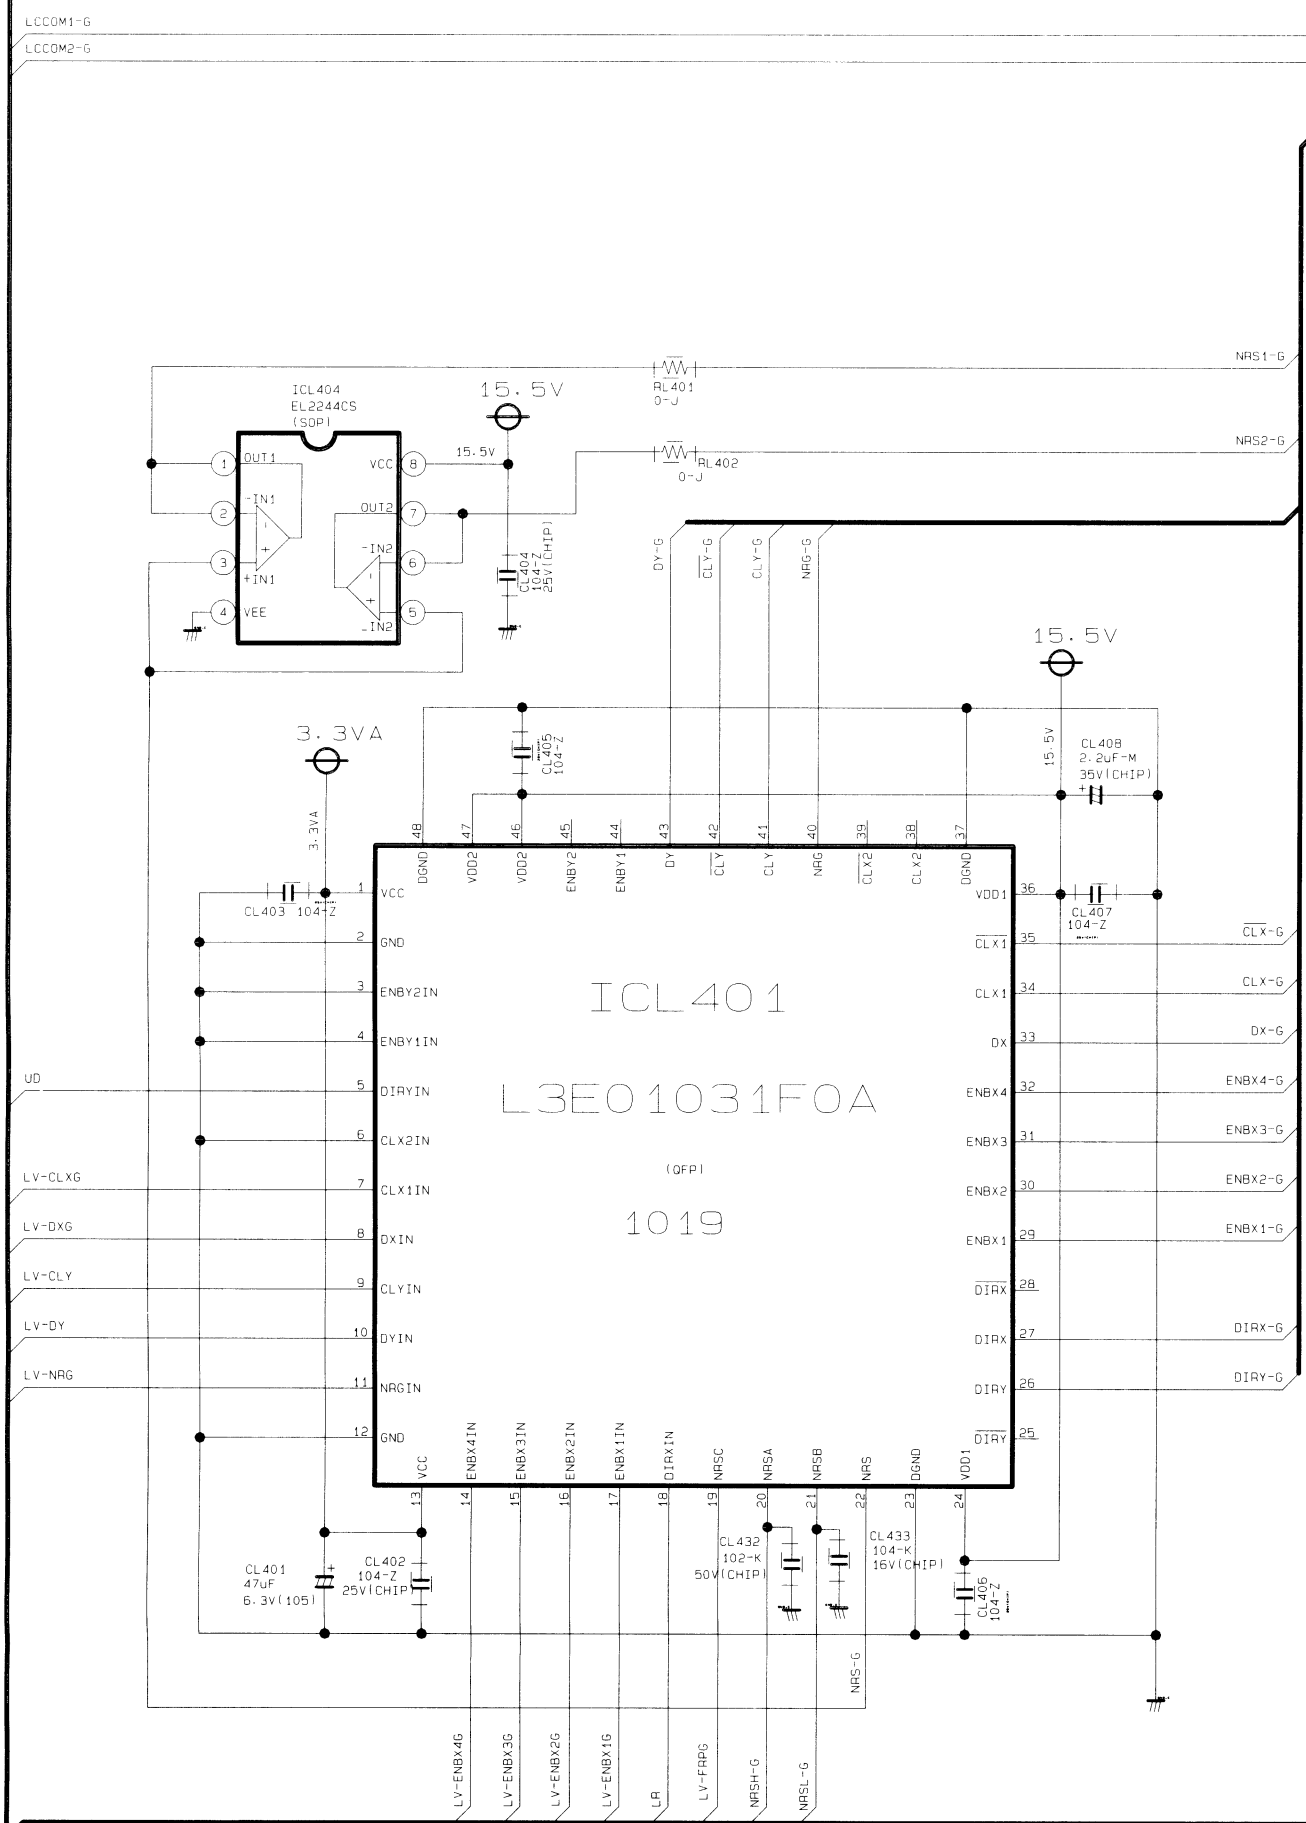

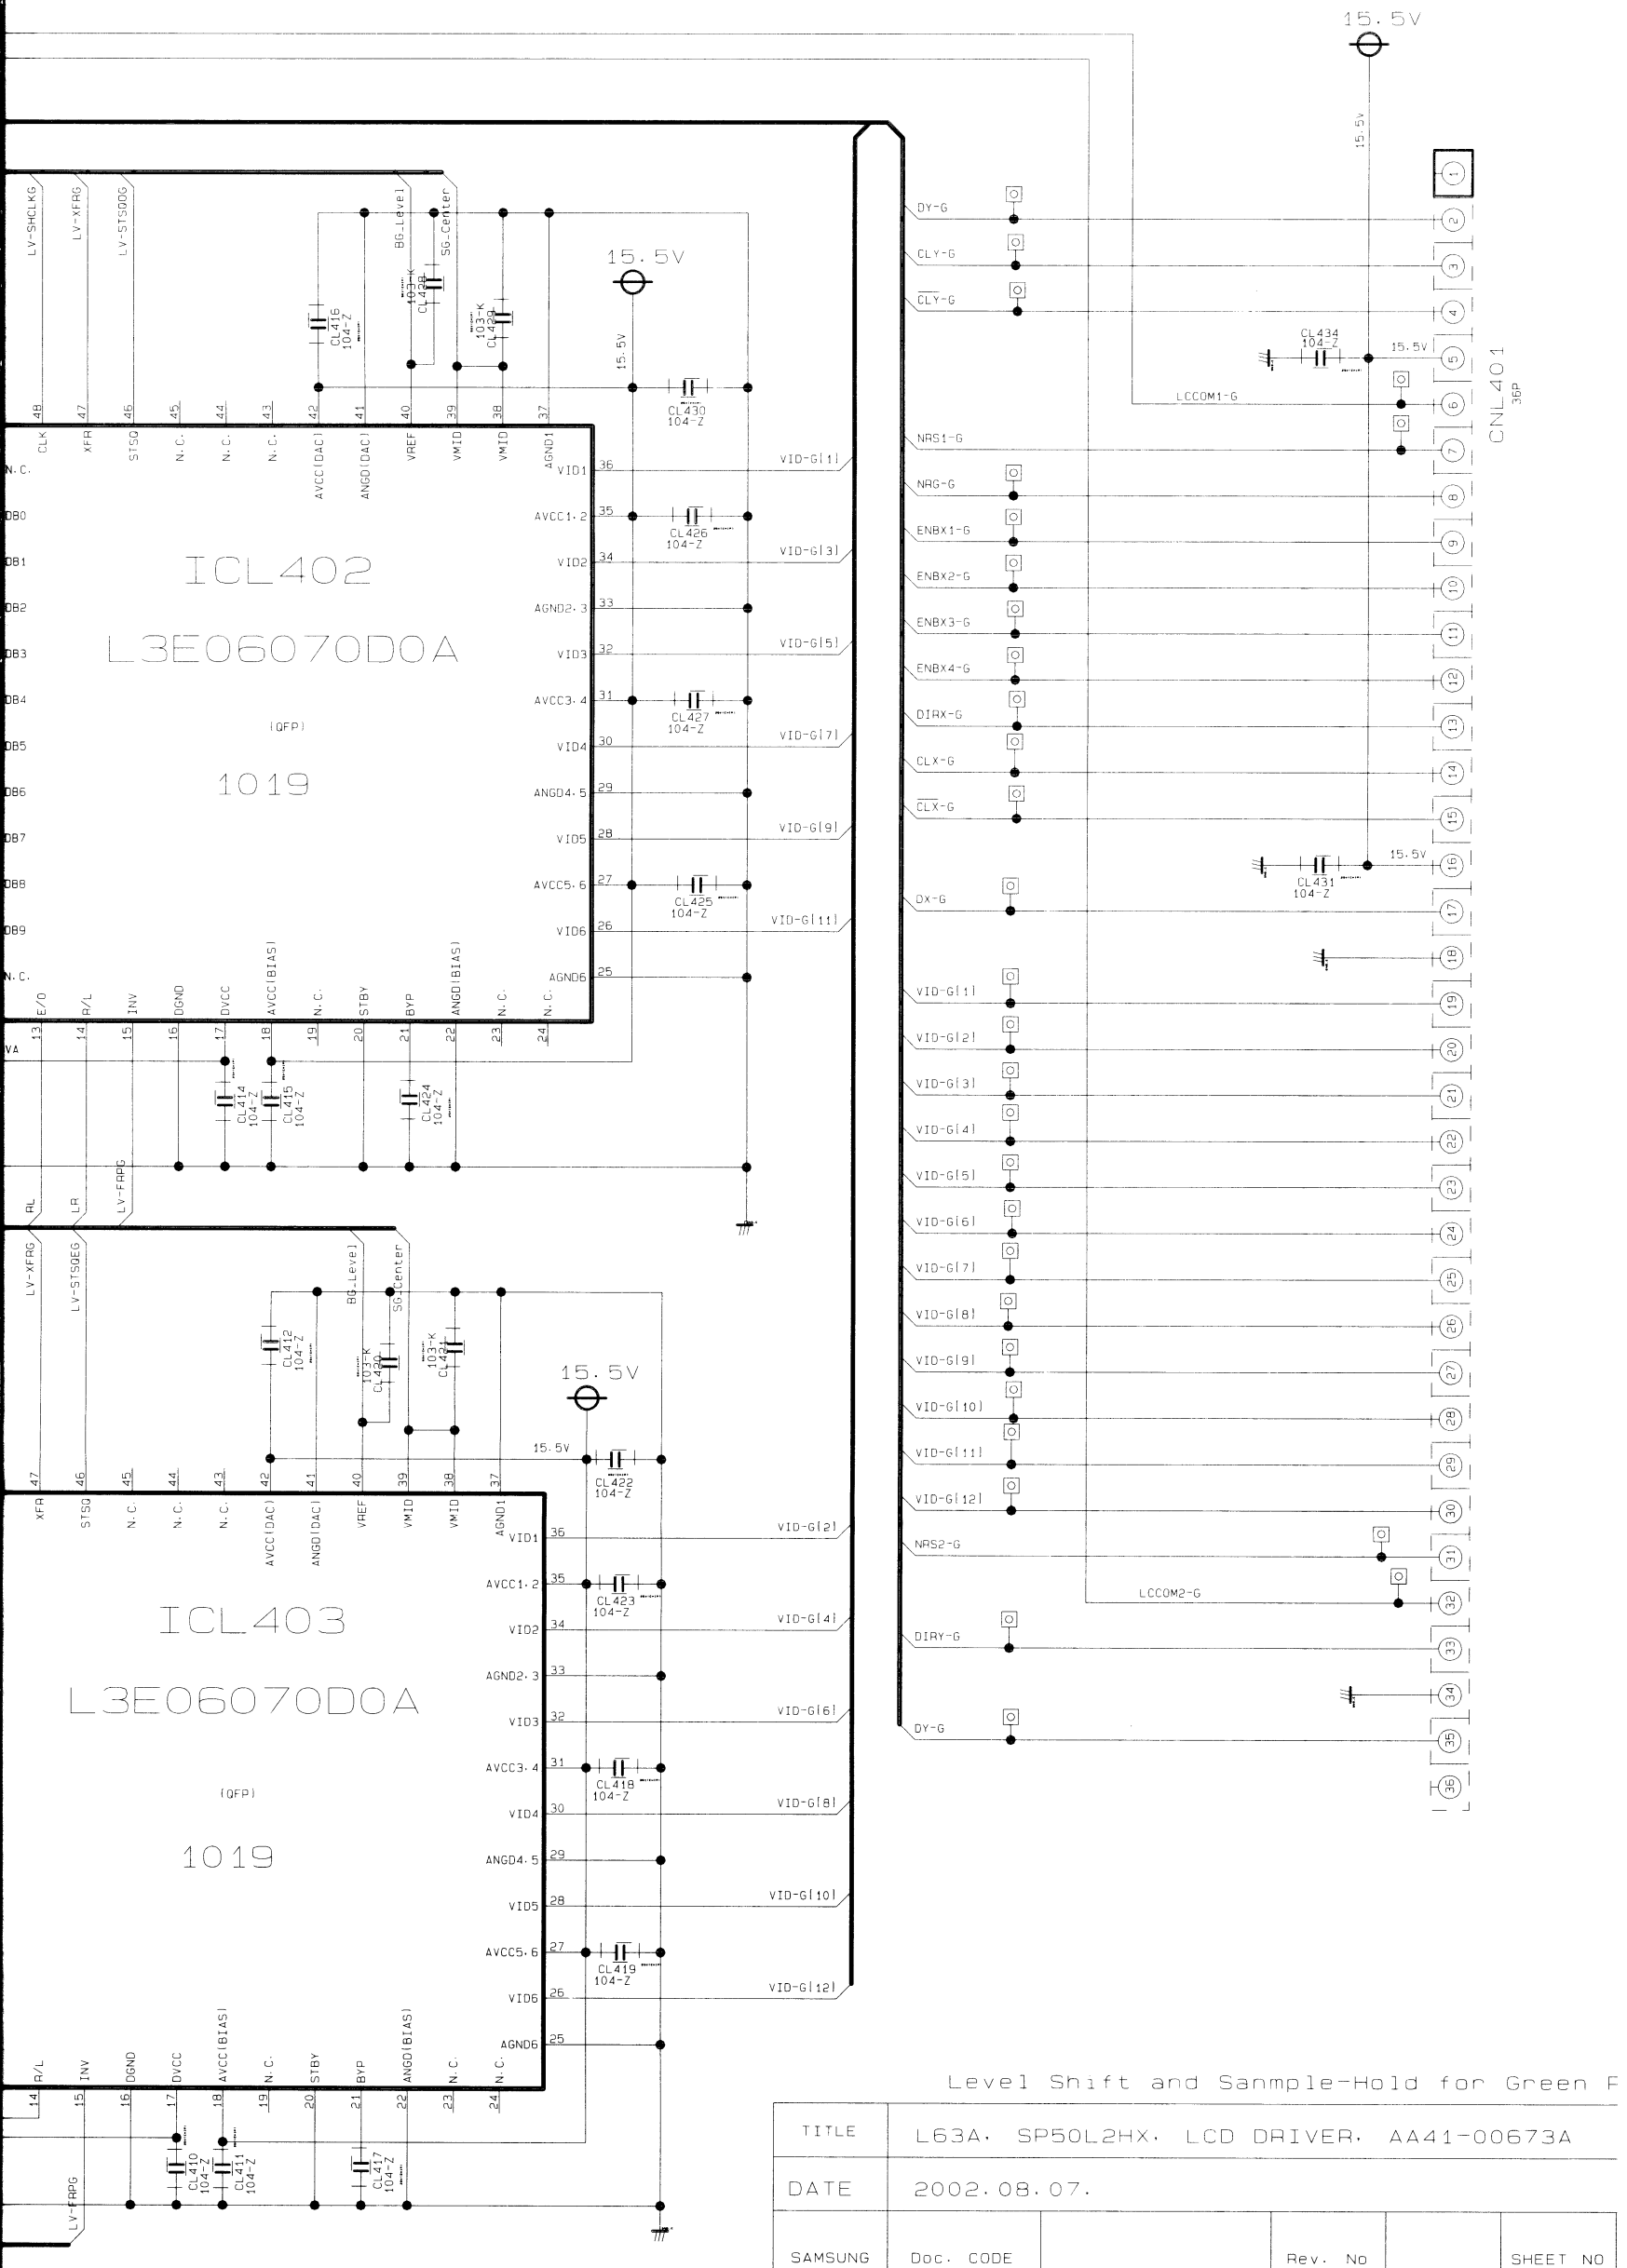

Level Shift and Sanmple-Hold for Green F

TITLE	L63A, SP50L2HX, LCD DRIVER, AA41-00673A				
DATE	2002.08.07.				
SAMSUNG	Doc. CODE		Rev. No		SHEET NO

5-10 LCD DRIVER-5

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

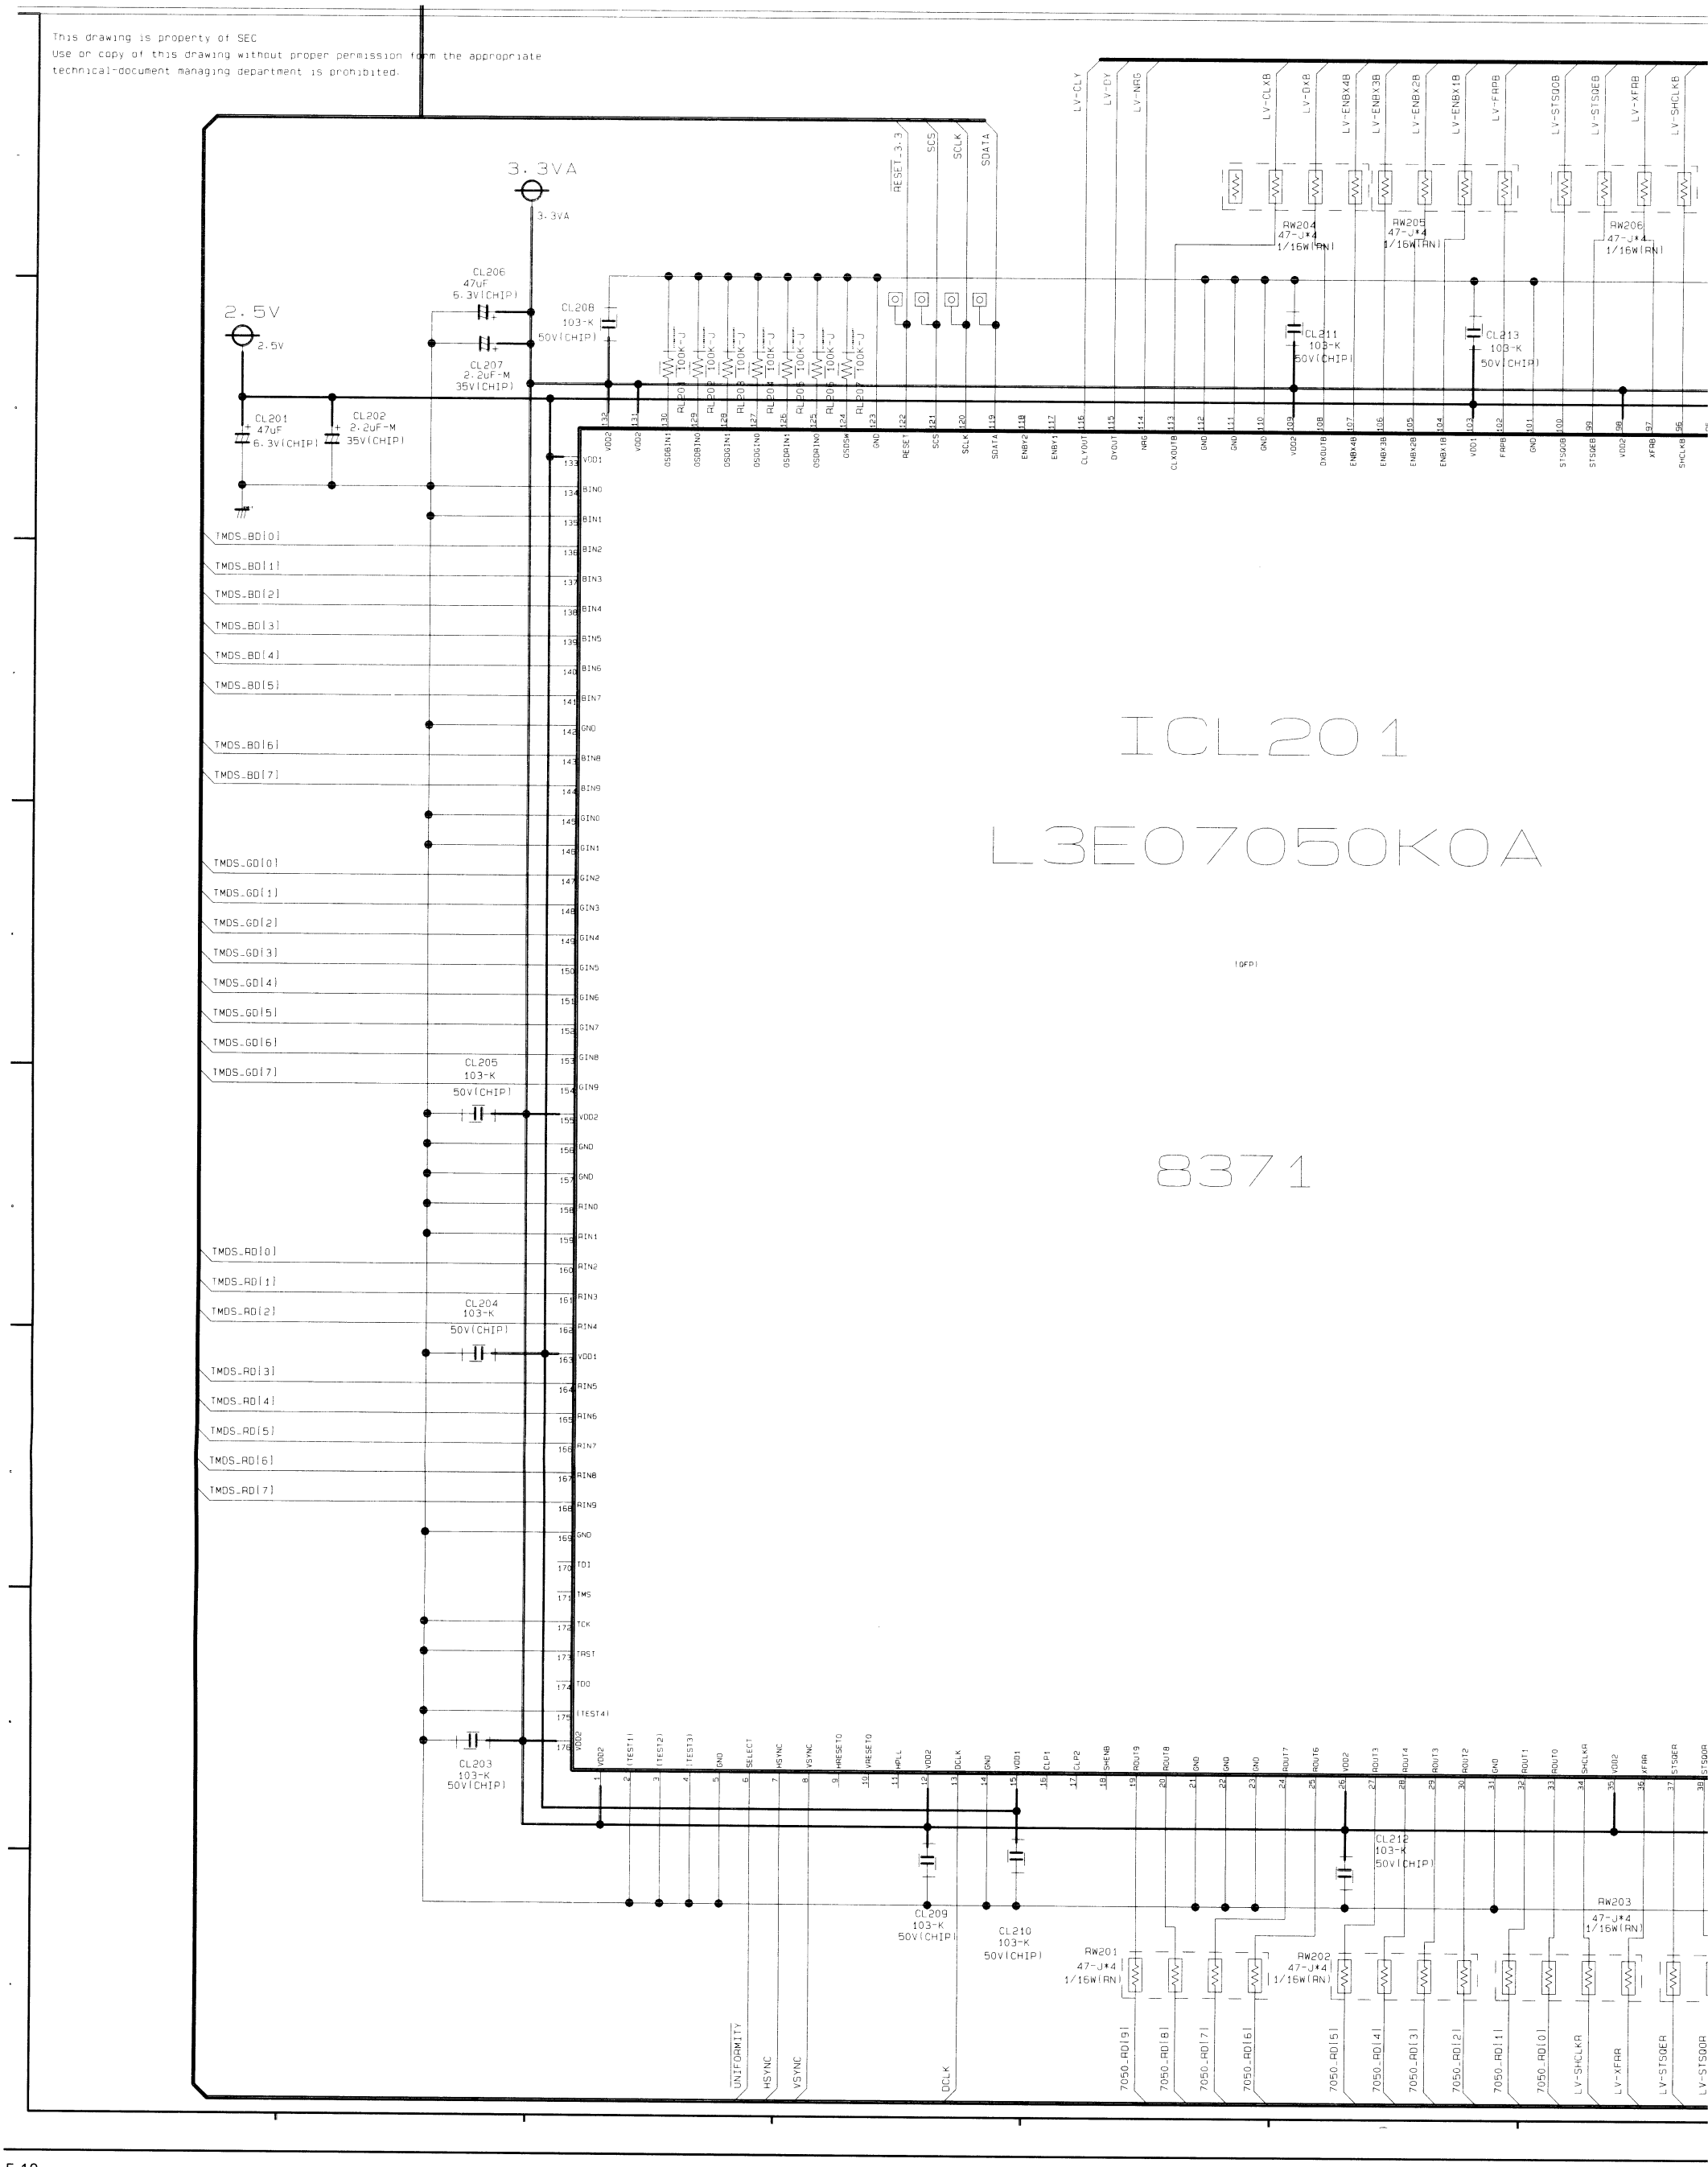

ICL201

L3E07050K0A

(QFP)

8371

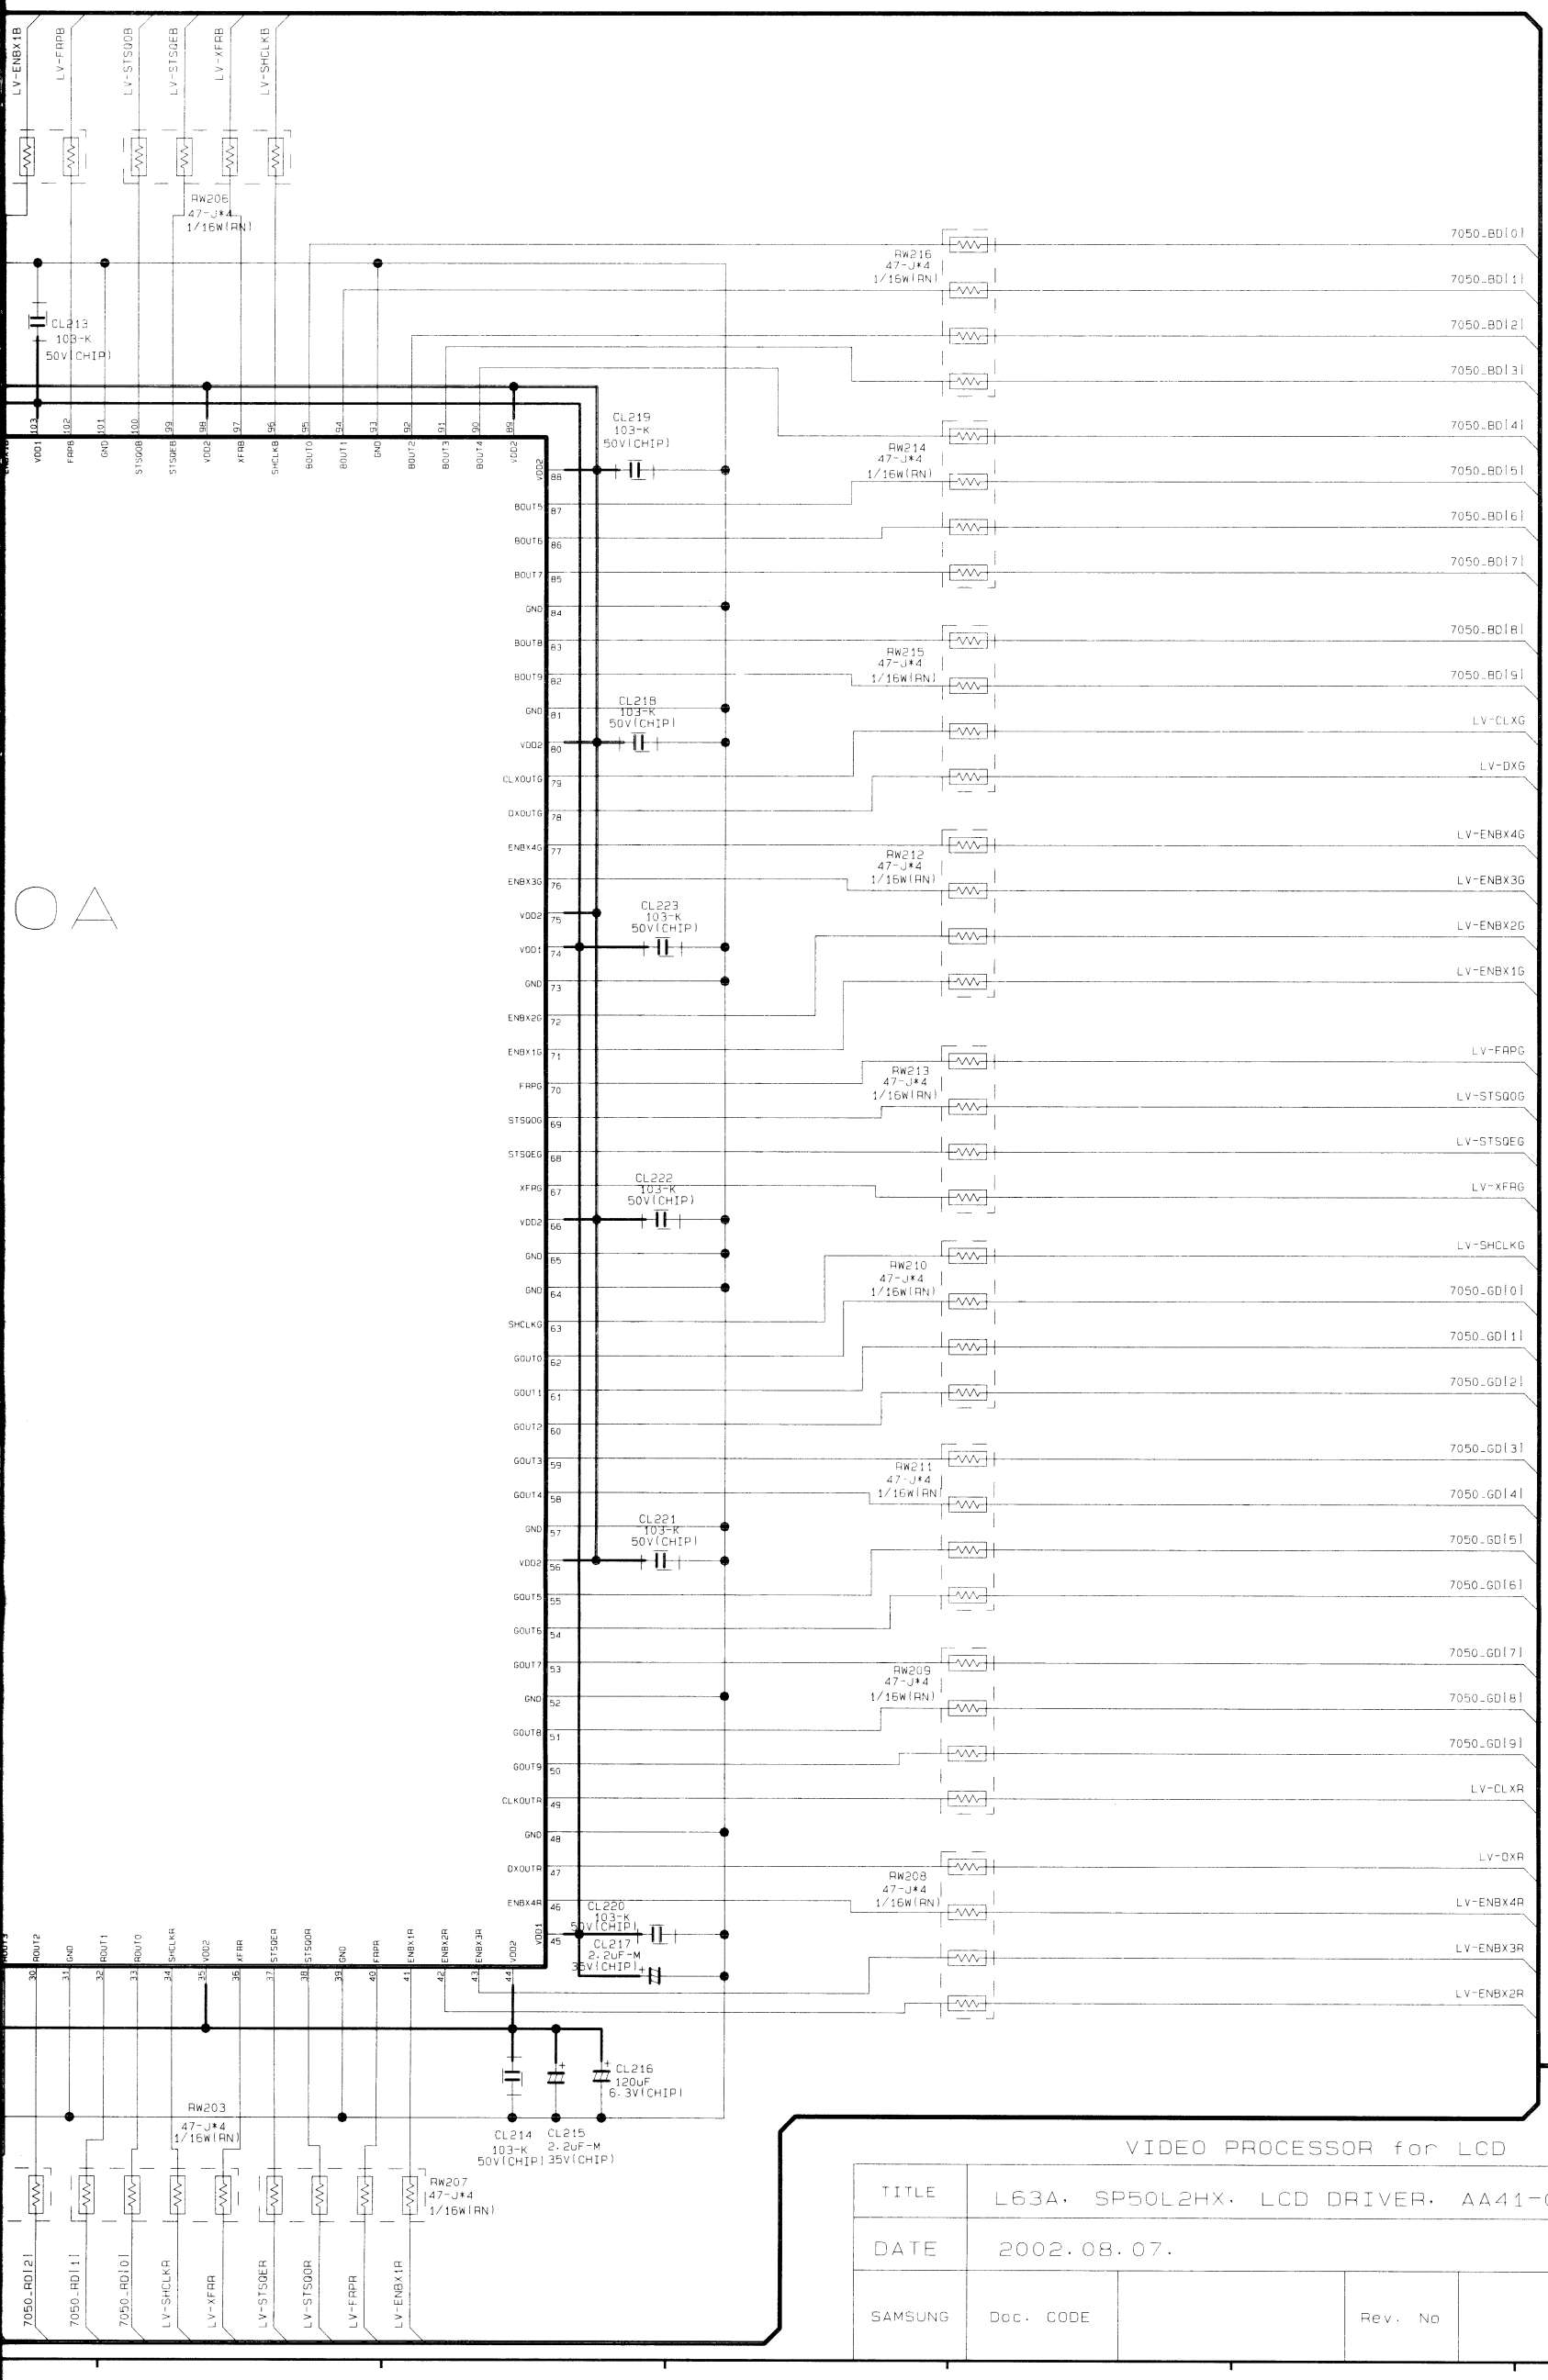

VIDEO PROCESSOR for LCD

TITLE	L63A, SP50L2HX, LCD DRIVER, AA41-00673A					
DATE	2002.08.07.					
SAMSUNG	Doc. CODE		Rev. No		SHEET NO	3/6

5-11 LCD DRIVER-6

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

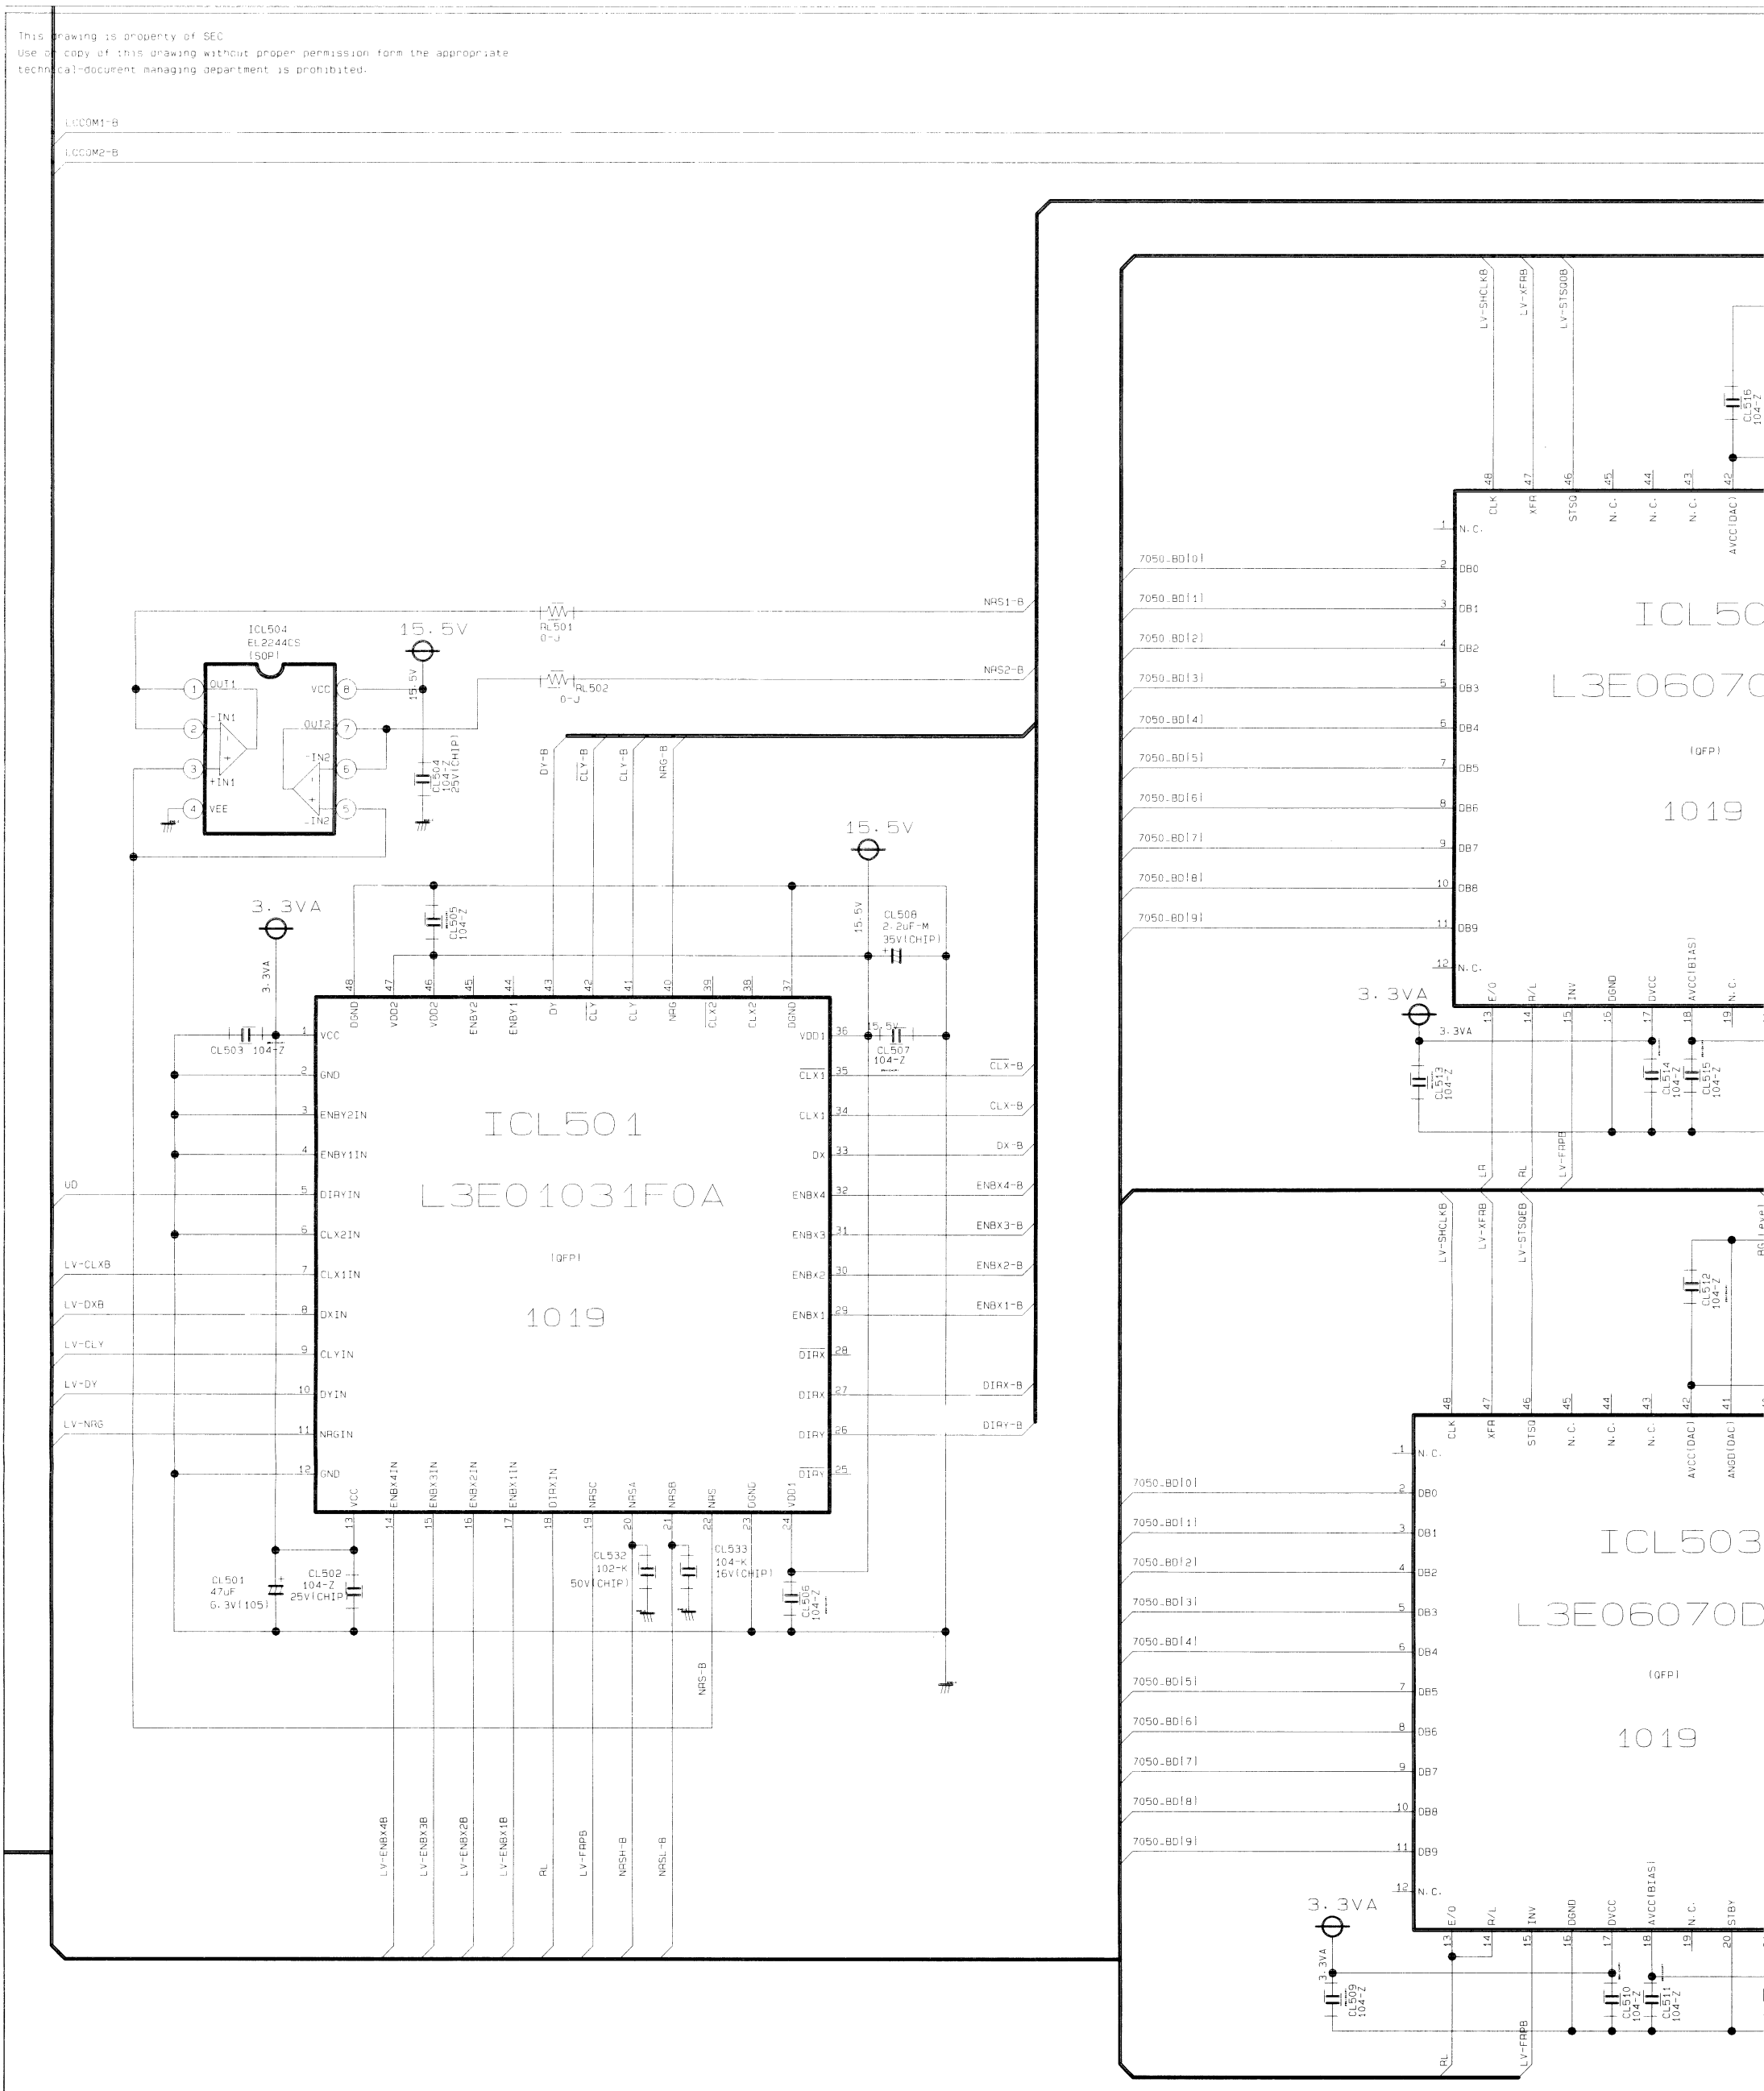

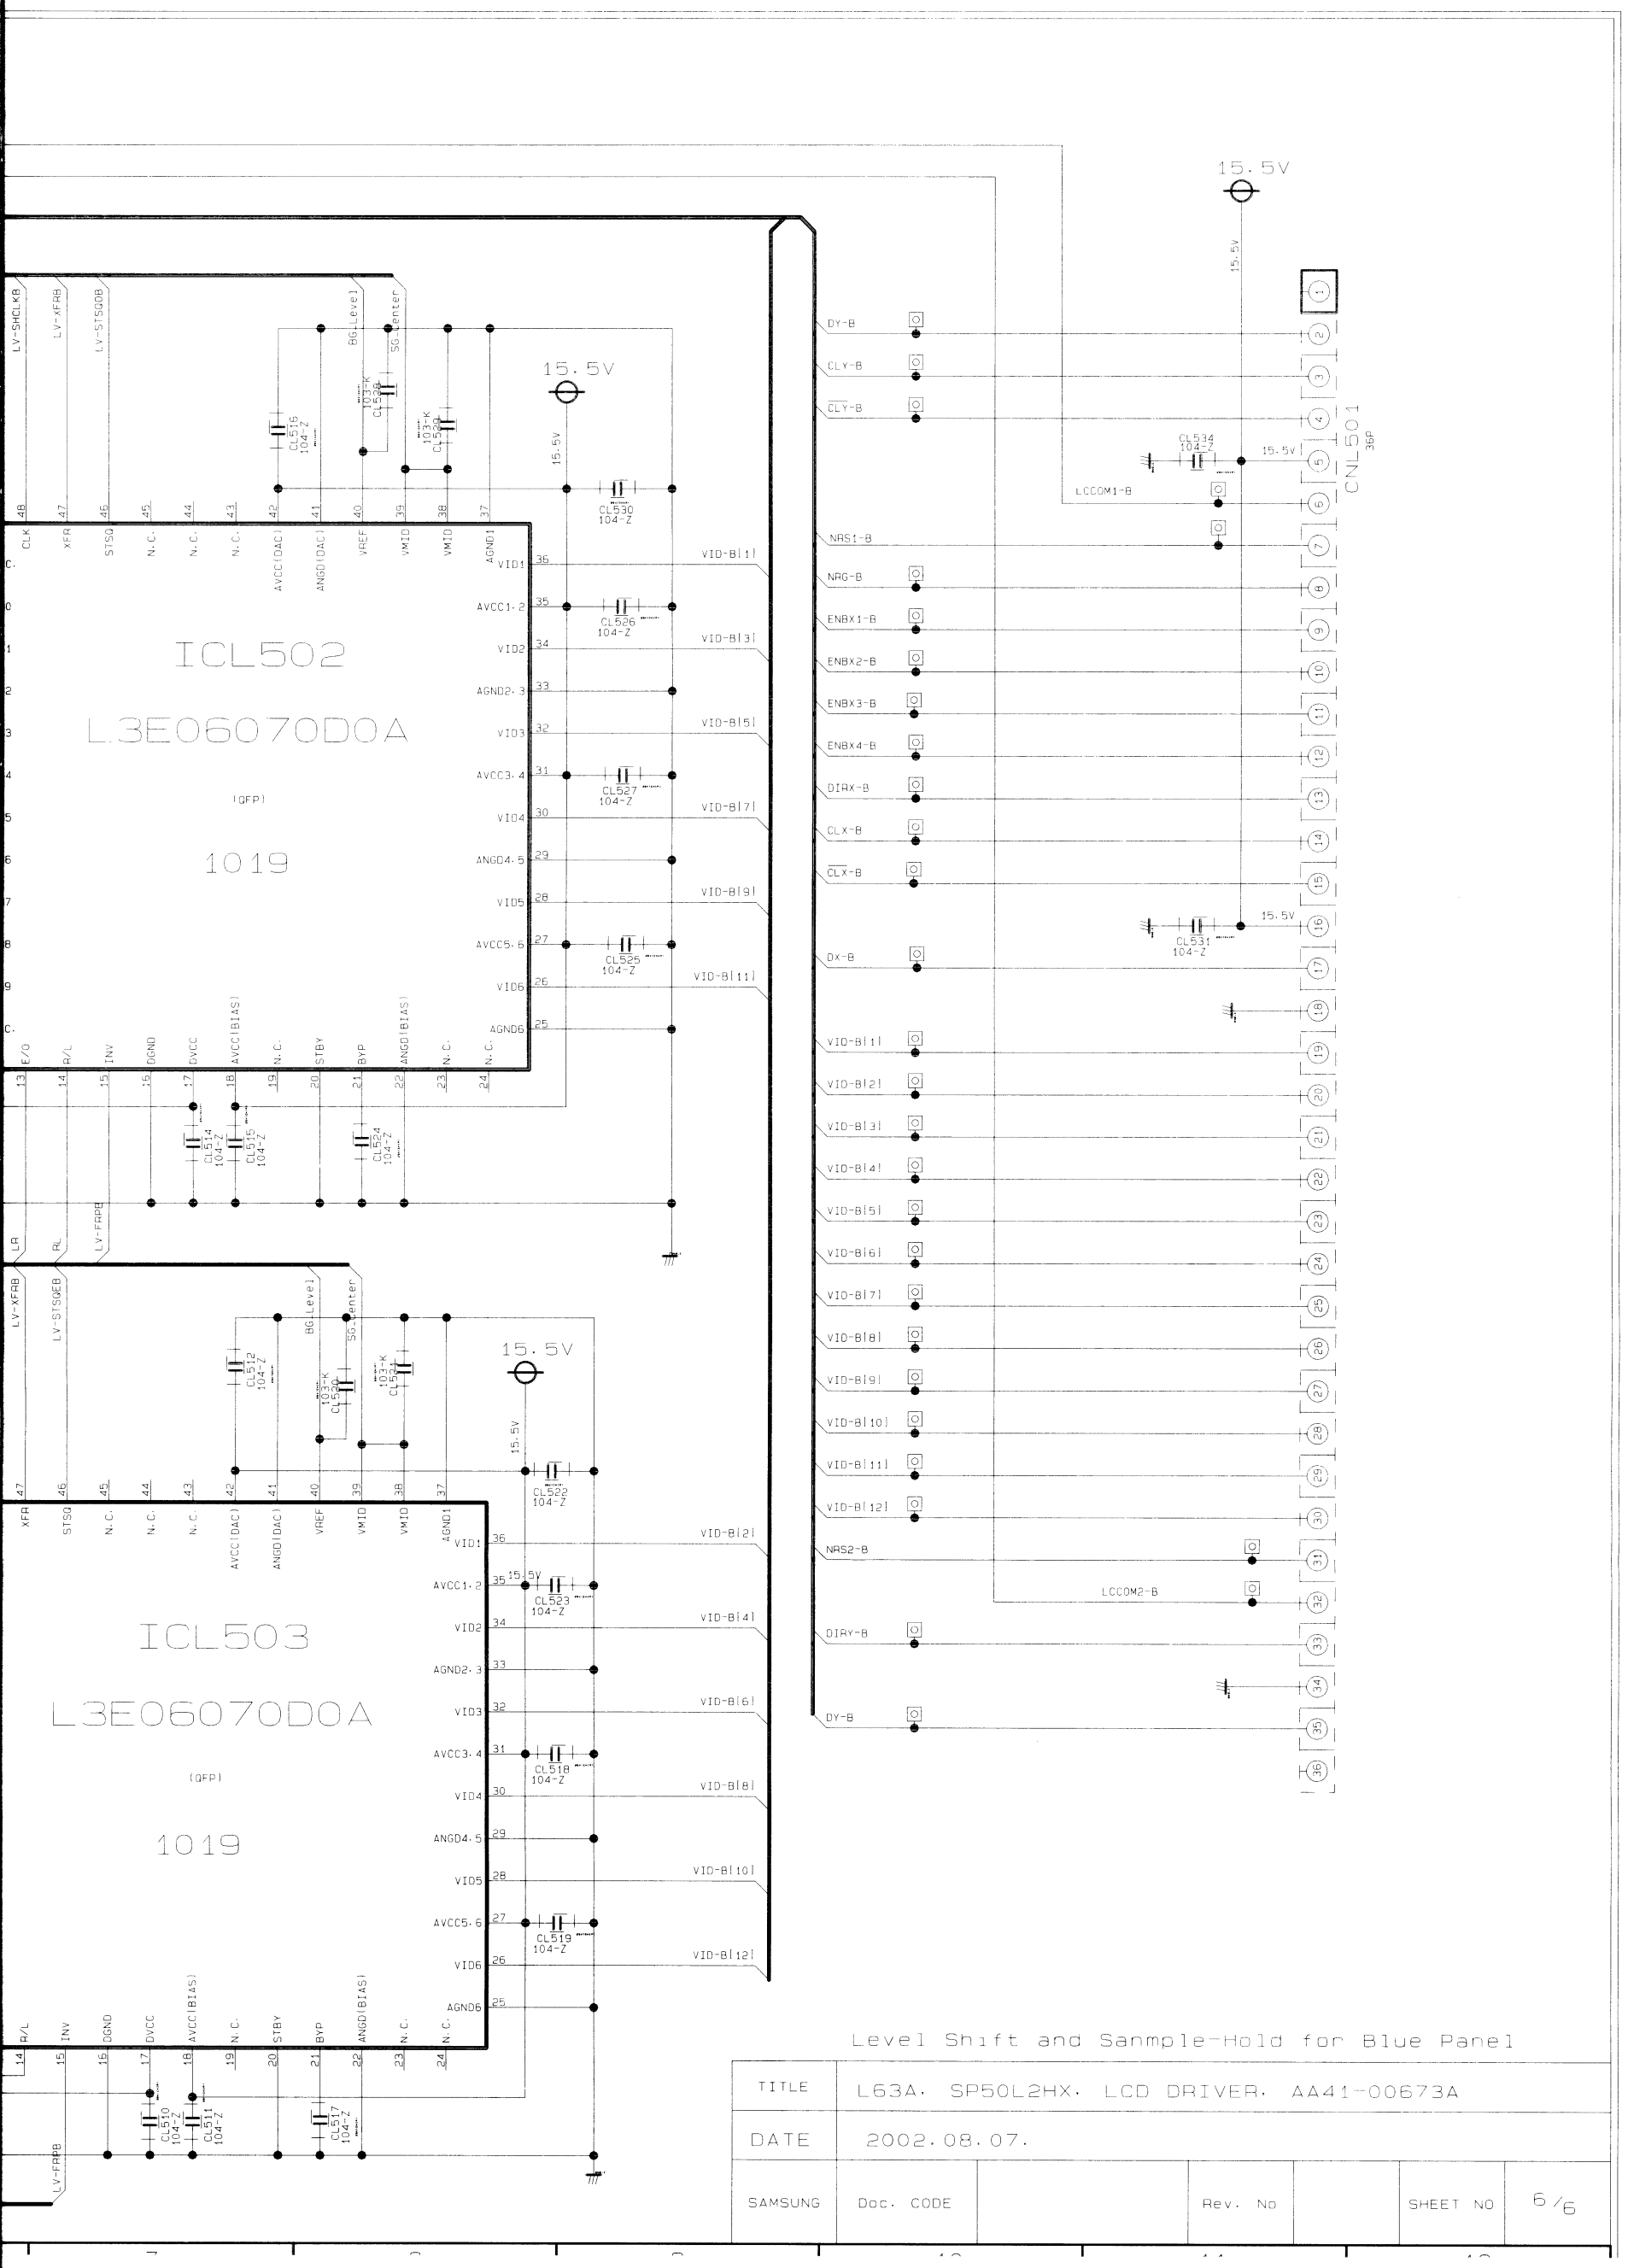
ICL502
L3E06070D0A
(QFP)
1019
ICL503
L3E06070D0A
(QFP)
1019
15.5V
CN501
36P
DY-B
CLY-B
CLY-B
LCCOM1-B
NAS1-B
NAG-B
ENBX1-B
ENBX2-B
ENBX3-B
ENBx4-B
DIAx-B
CLX-B
CLX-B
Dx-B
VID-B[1]
VID-B[2]
VID-B[3]
VID-B[4]
VID-B[5]
VID-B[6]
VID-B[7]
VID-B[8]
VID-B[9]
VID-B[10]
VID-B[11]
VID-B[12]
NAS2-B
LCCOM2-B
DIAY-B
DY-B
LV-SHCLKB
LV-XFRB
LV-STSQOB
LV-FRPB
BG-Level
SG-Center
Level Shift and Sanmple-Hold for Blue Panel
TITLE
L63A. SP50L2HX. LCD DRIVER. AA41-00673A
DATE
2002.08.07.
SAMSUNG
Doc. CODE
Rev. No
SHEET NO
6/6

5-12 SOUND

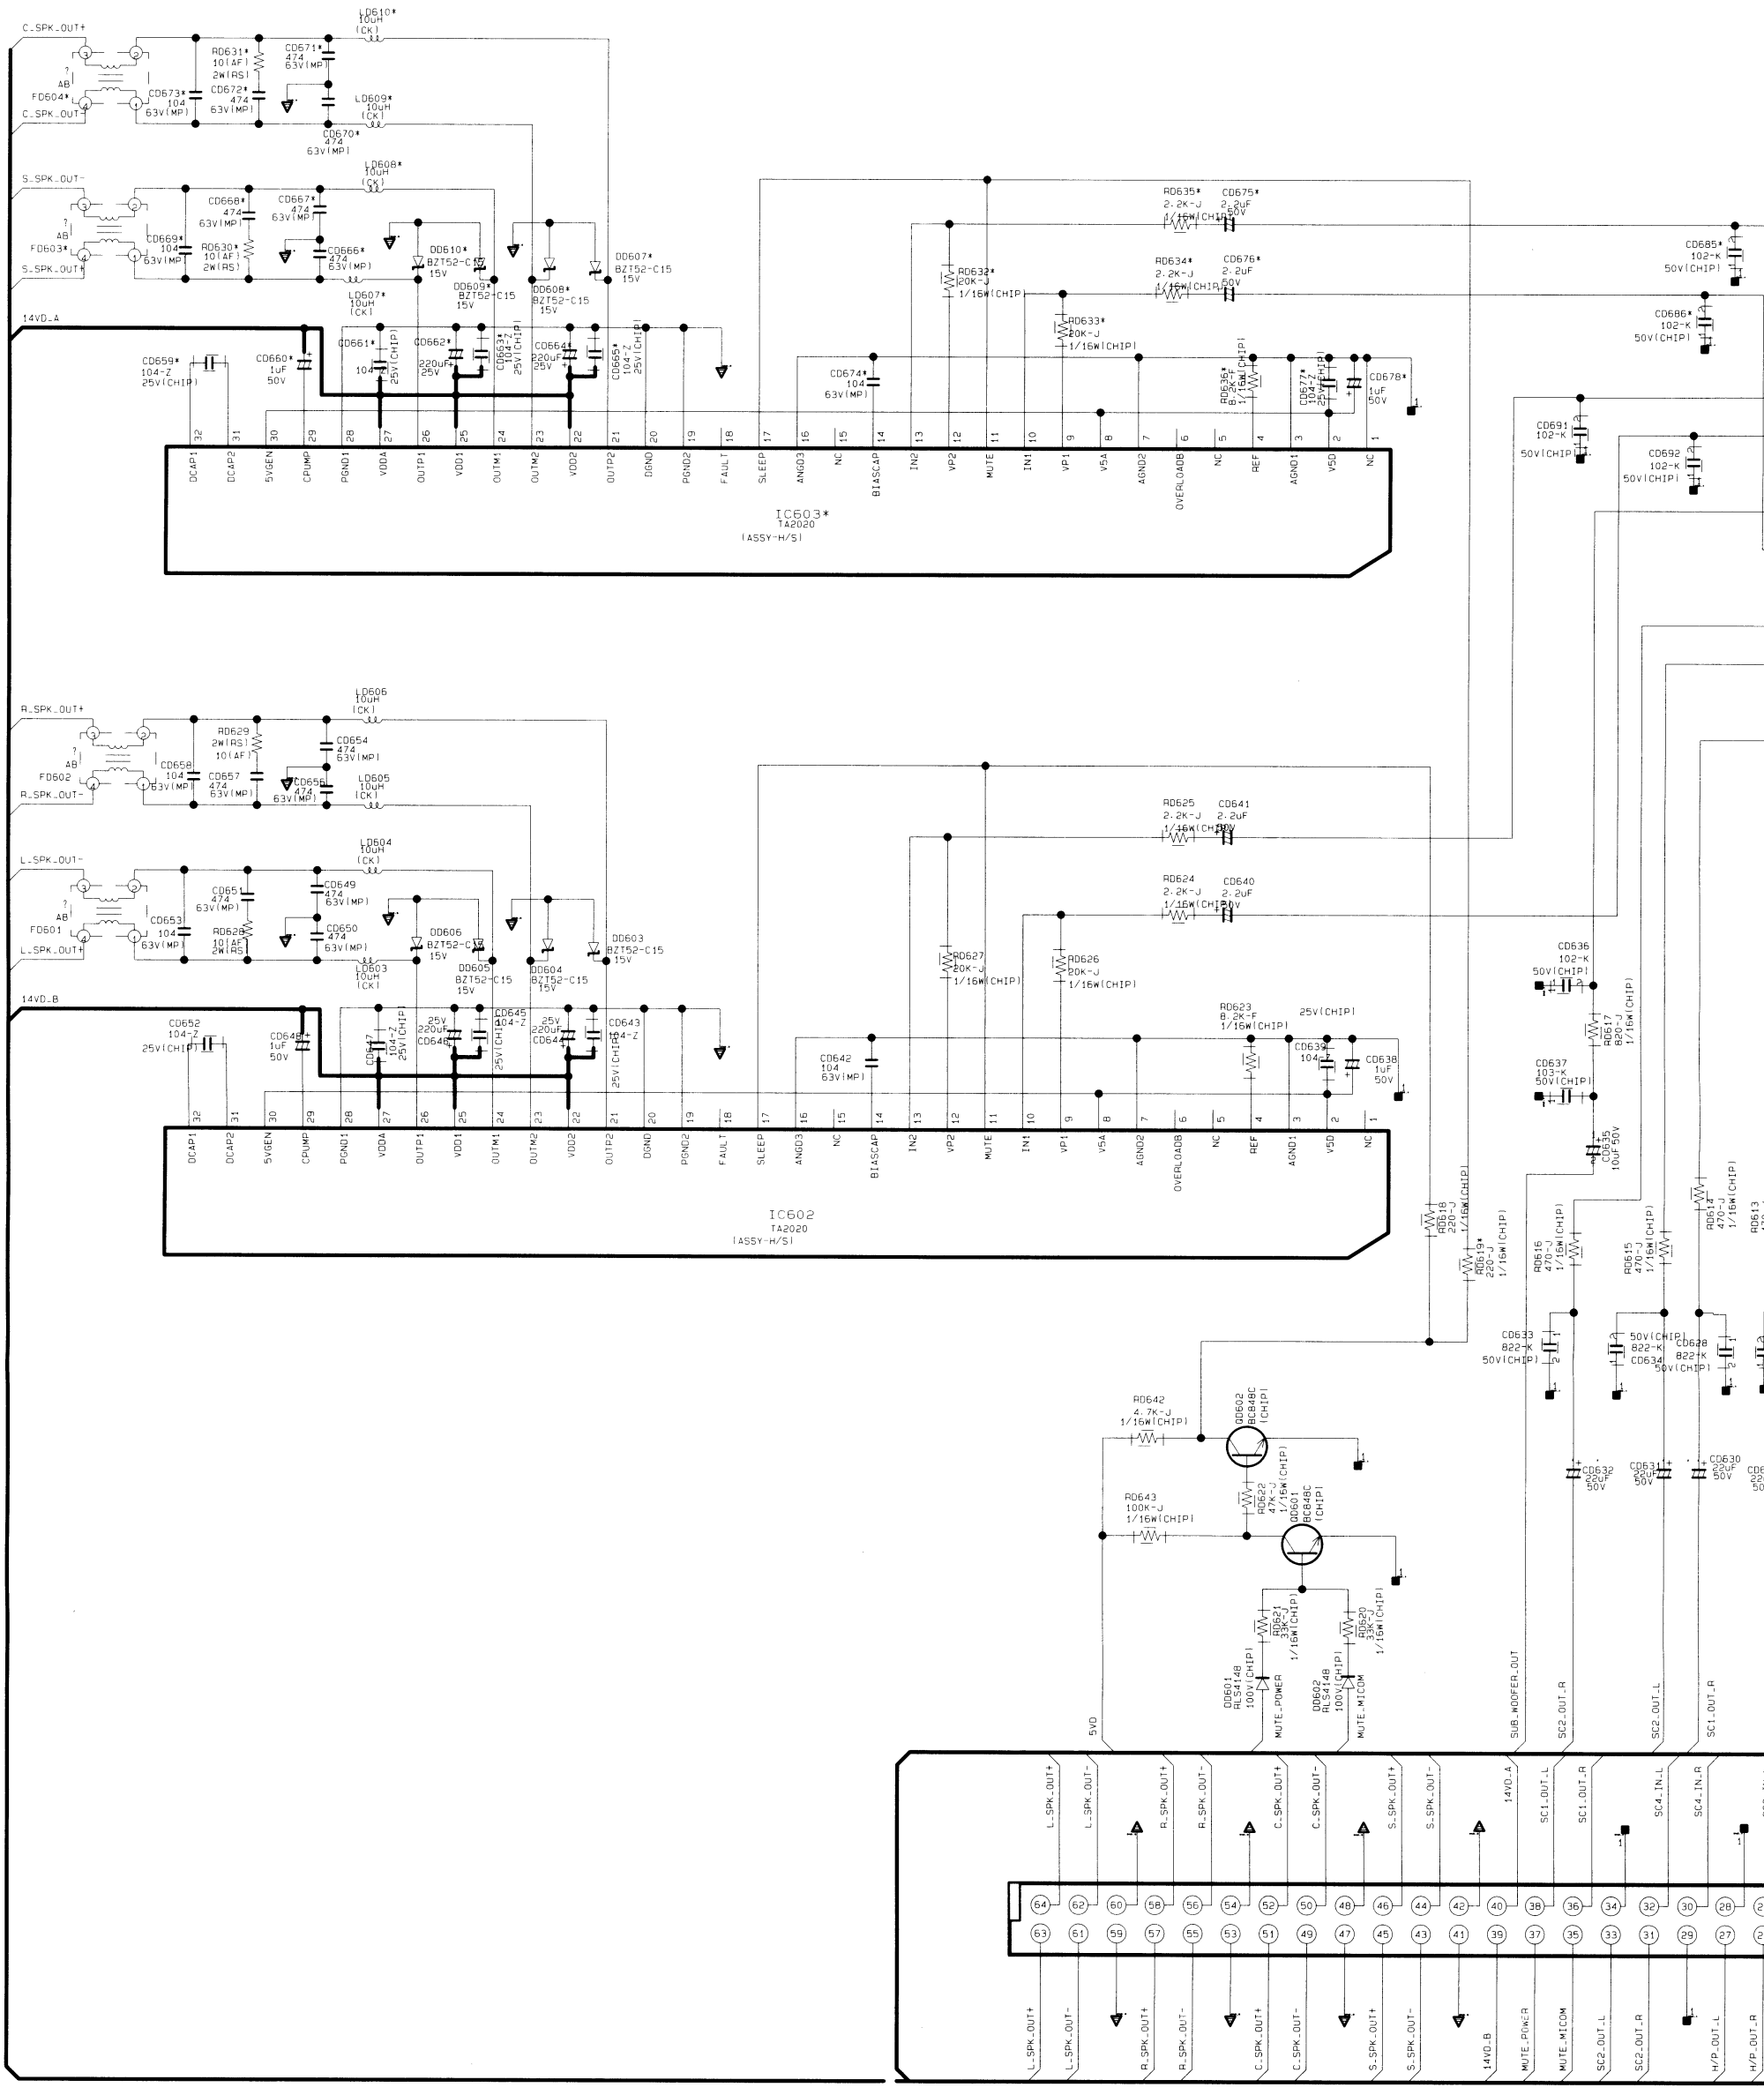
C_SPK_OUT+
C_SPK_OUT-
S_SPK_OUT-
S_SPK_OUT+
R_SPK_OUT+
R_SPK_OUT-
L_SPK_OUT-
L_SPK_OUT+
14VD_A
14VD_B
IC603*
TA2020
(ASSY-H/S)
IC602
TA2020
(ASSY-H/S)
DCAP1
DCAP2
5VGEN
CPUMP
PGND1
VDDA
OUTP1
VDD1
OUTM1
OUTM2
VDD2
OUTP2
DGND
PGND2
FAULT
SLEEP
ANGD3
NC
BIASCAP
IN2
VP2
MUTE
IN1
VP1
V5A
AGND2
OVERLOADB
NC
REF
AGND1
V5D
NC
5VD
MUTE_POWER
MUTE_MICOM
SUB_WOOFER_OUT
SC2_OUT_R
SC2_OUT_L
SC1_OUT_R
SC4_IN_L
SC4_IN_R
SC3_IN_L
H/P_OUT_L
H/P_OUT_R

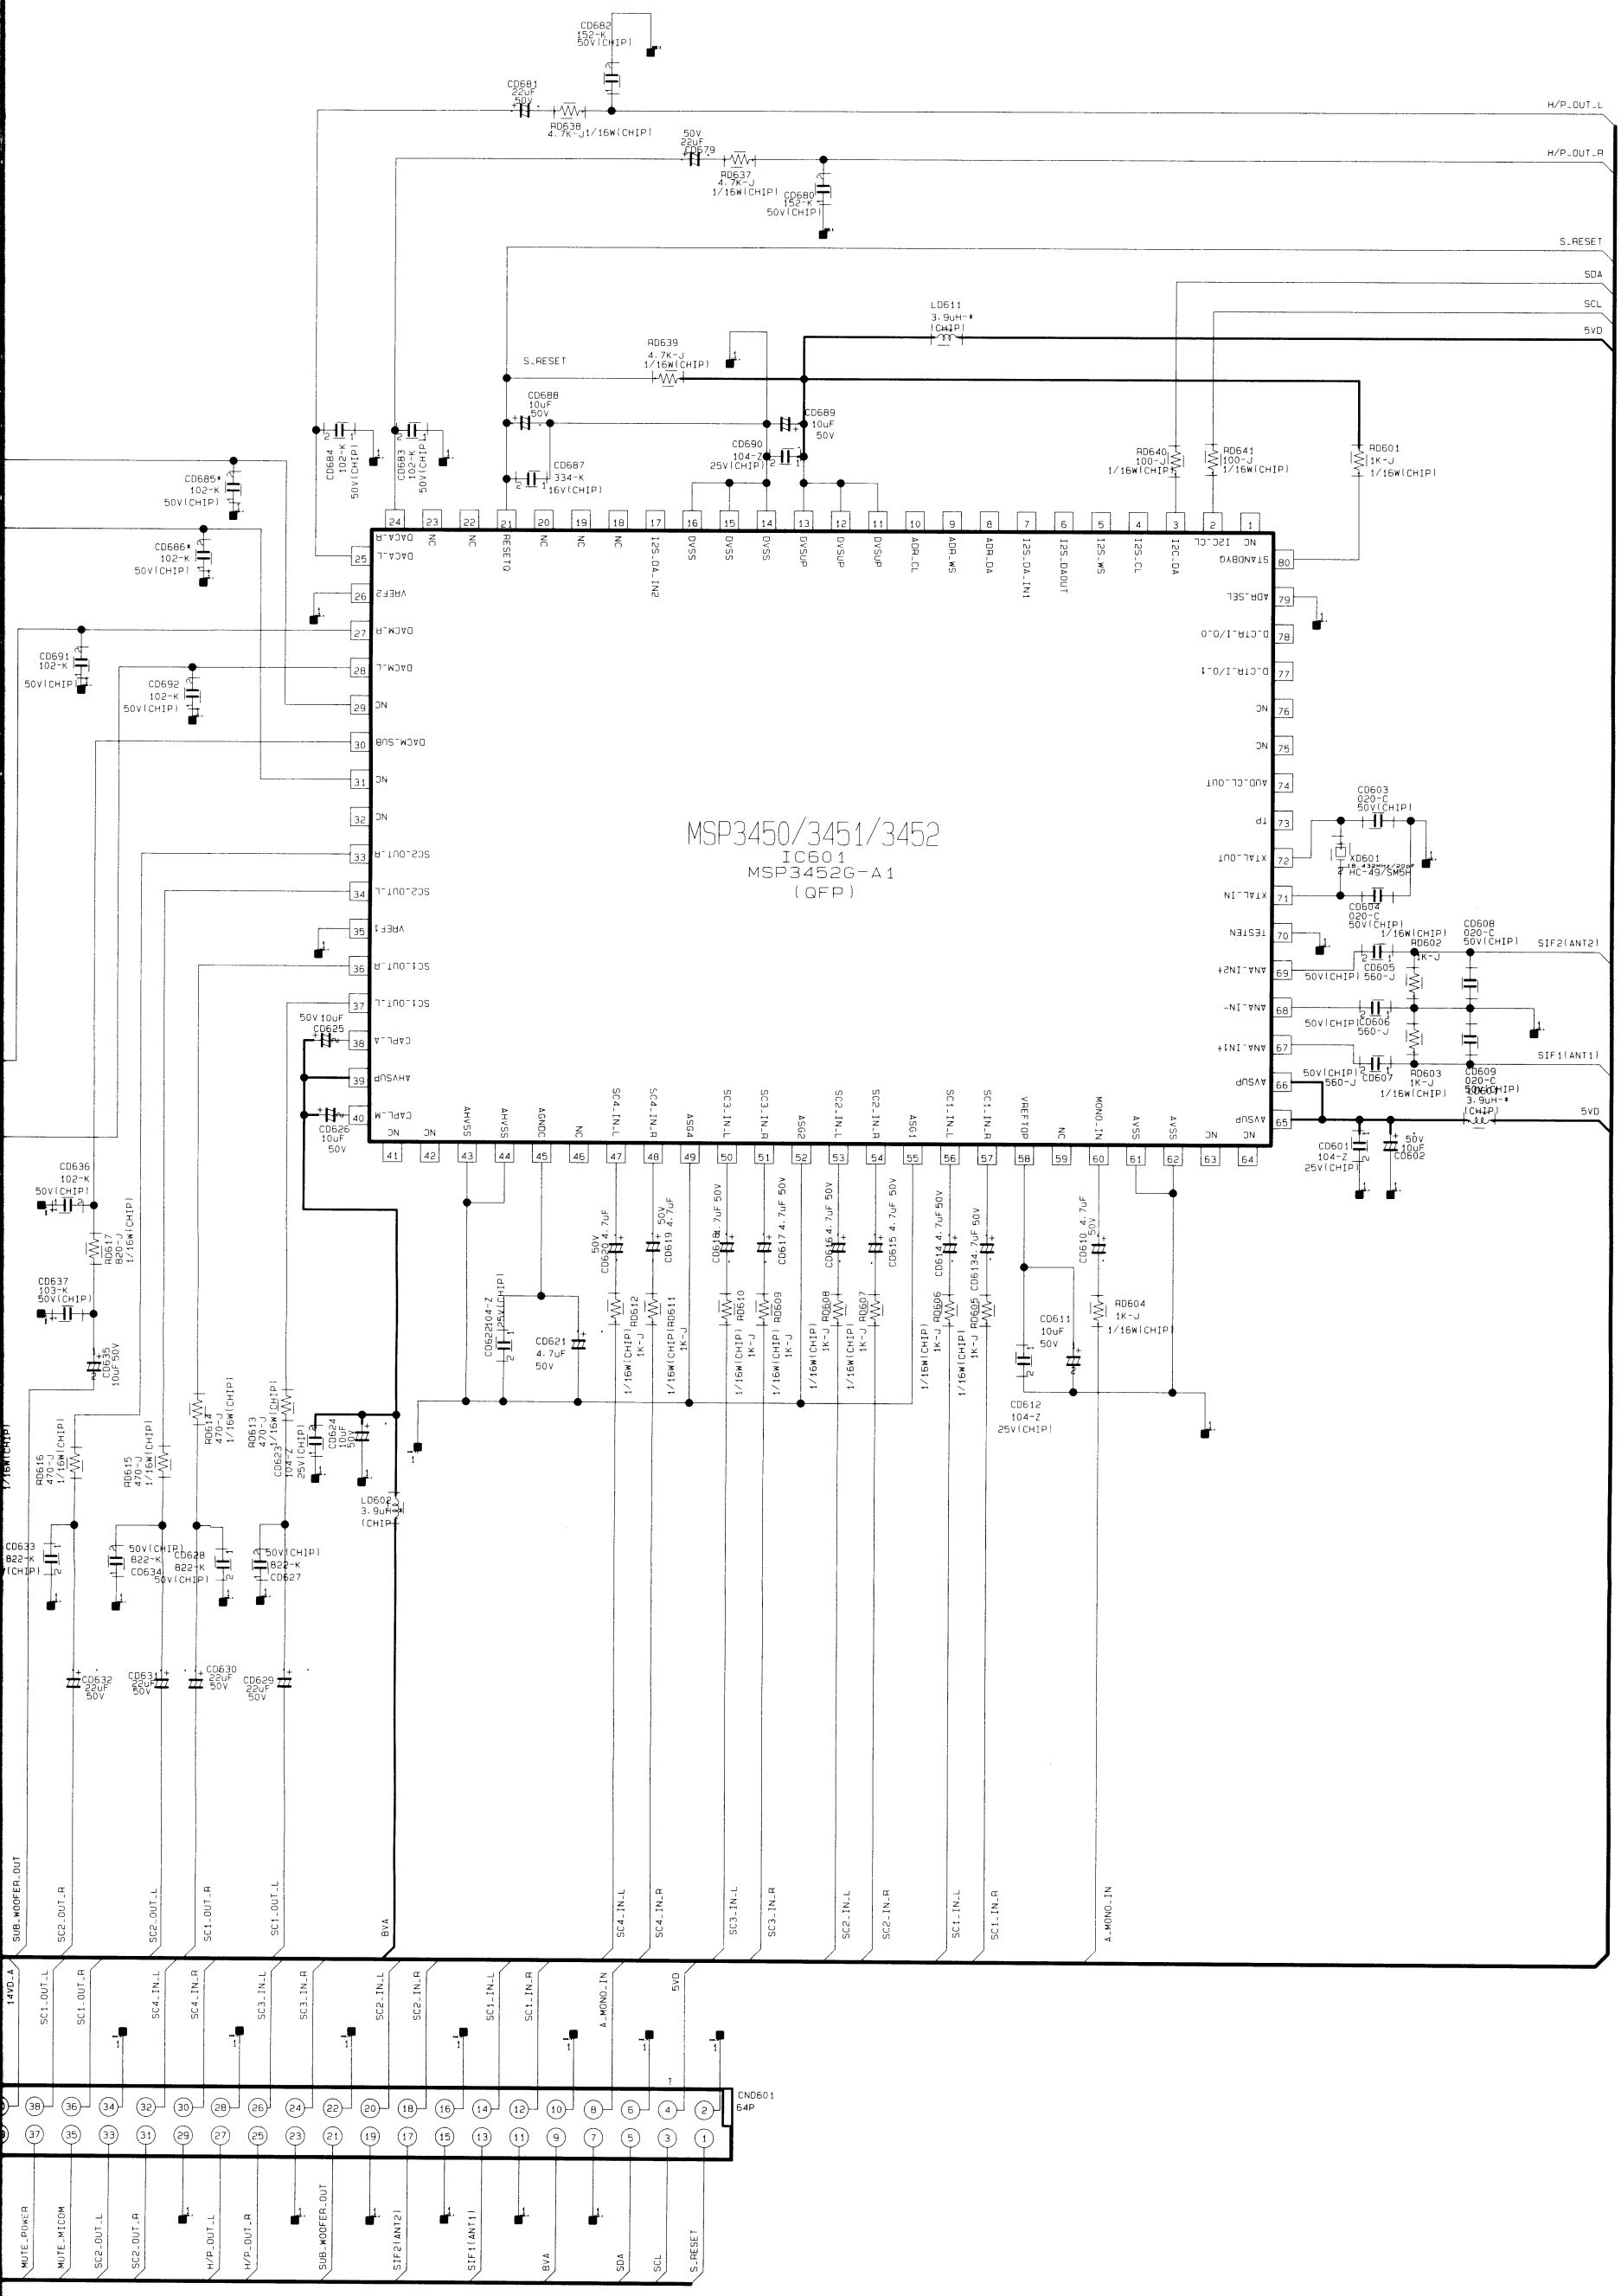
MSP3450/3451/3452
IC601
MSP3452G-A1
(QFP)
H/P_OUT_L
H/P_OUT_R
S_RESET
SDA
SCL
5VD
SIF2(ANT2)
SIF1(ANT1)
CND601
64P
MUTE_POWER
MUTE_MICOM
SUB_WOOFER_OUT
14VD_A
BVA
A_MONO_IN

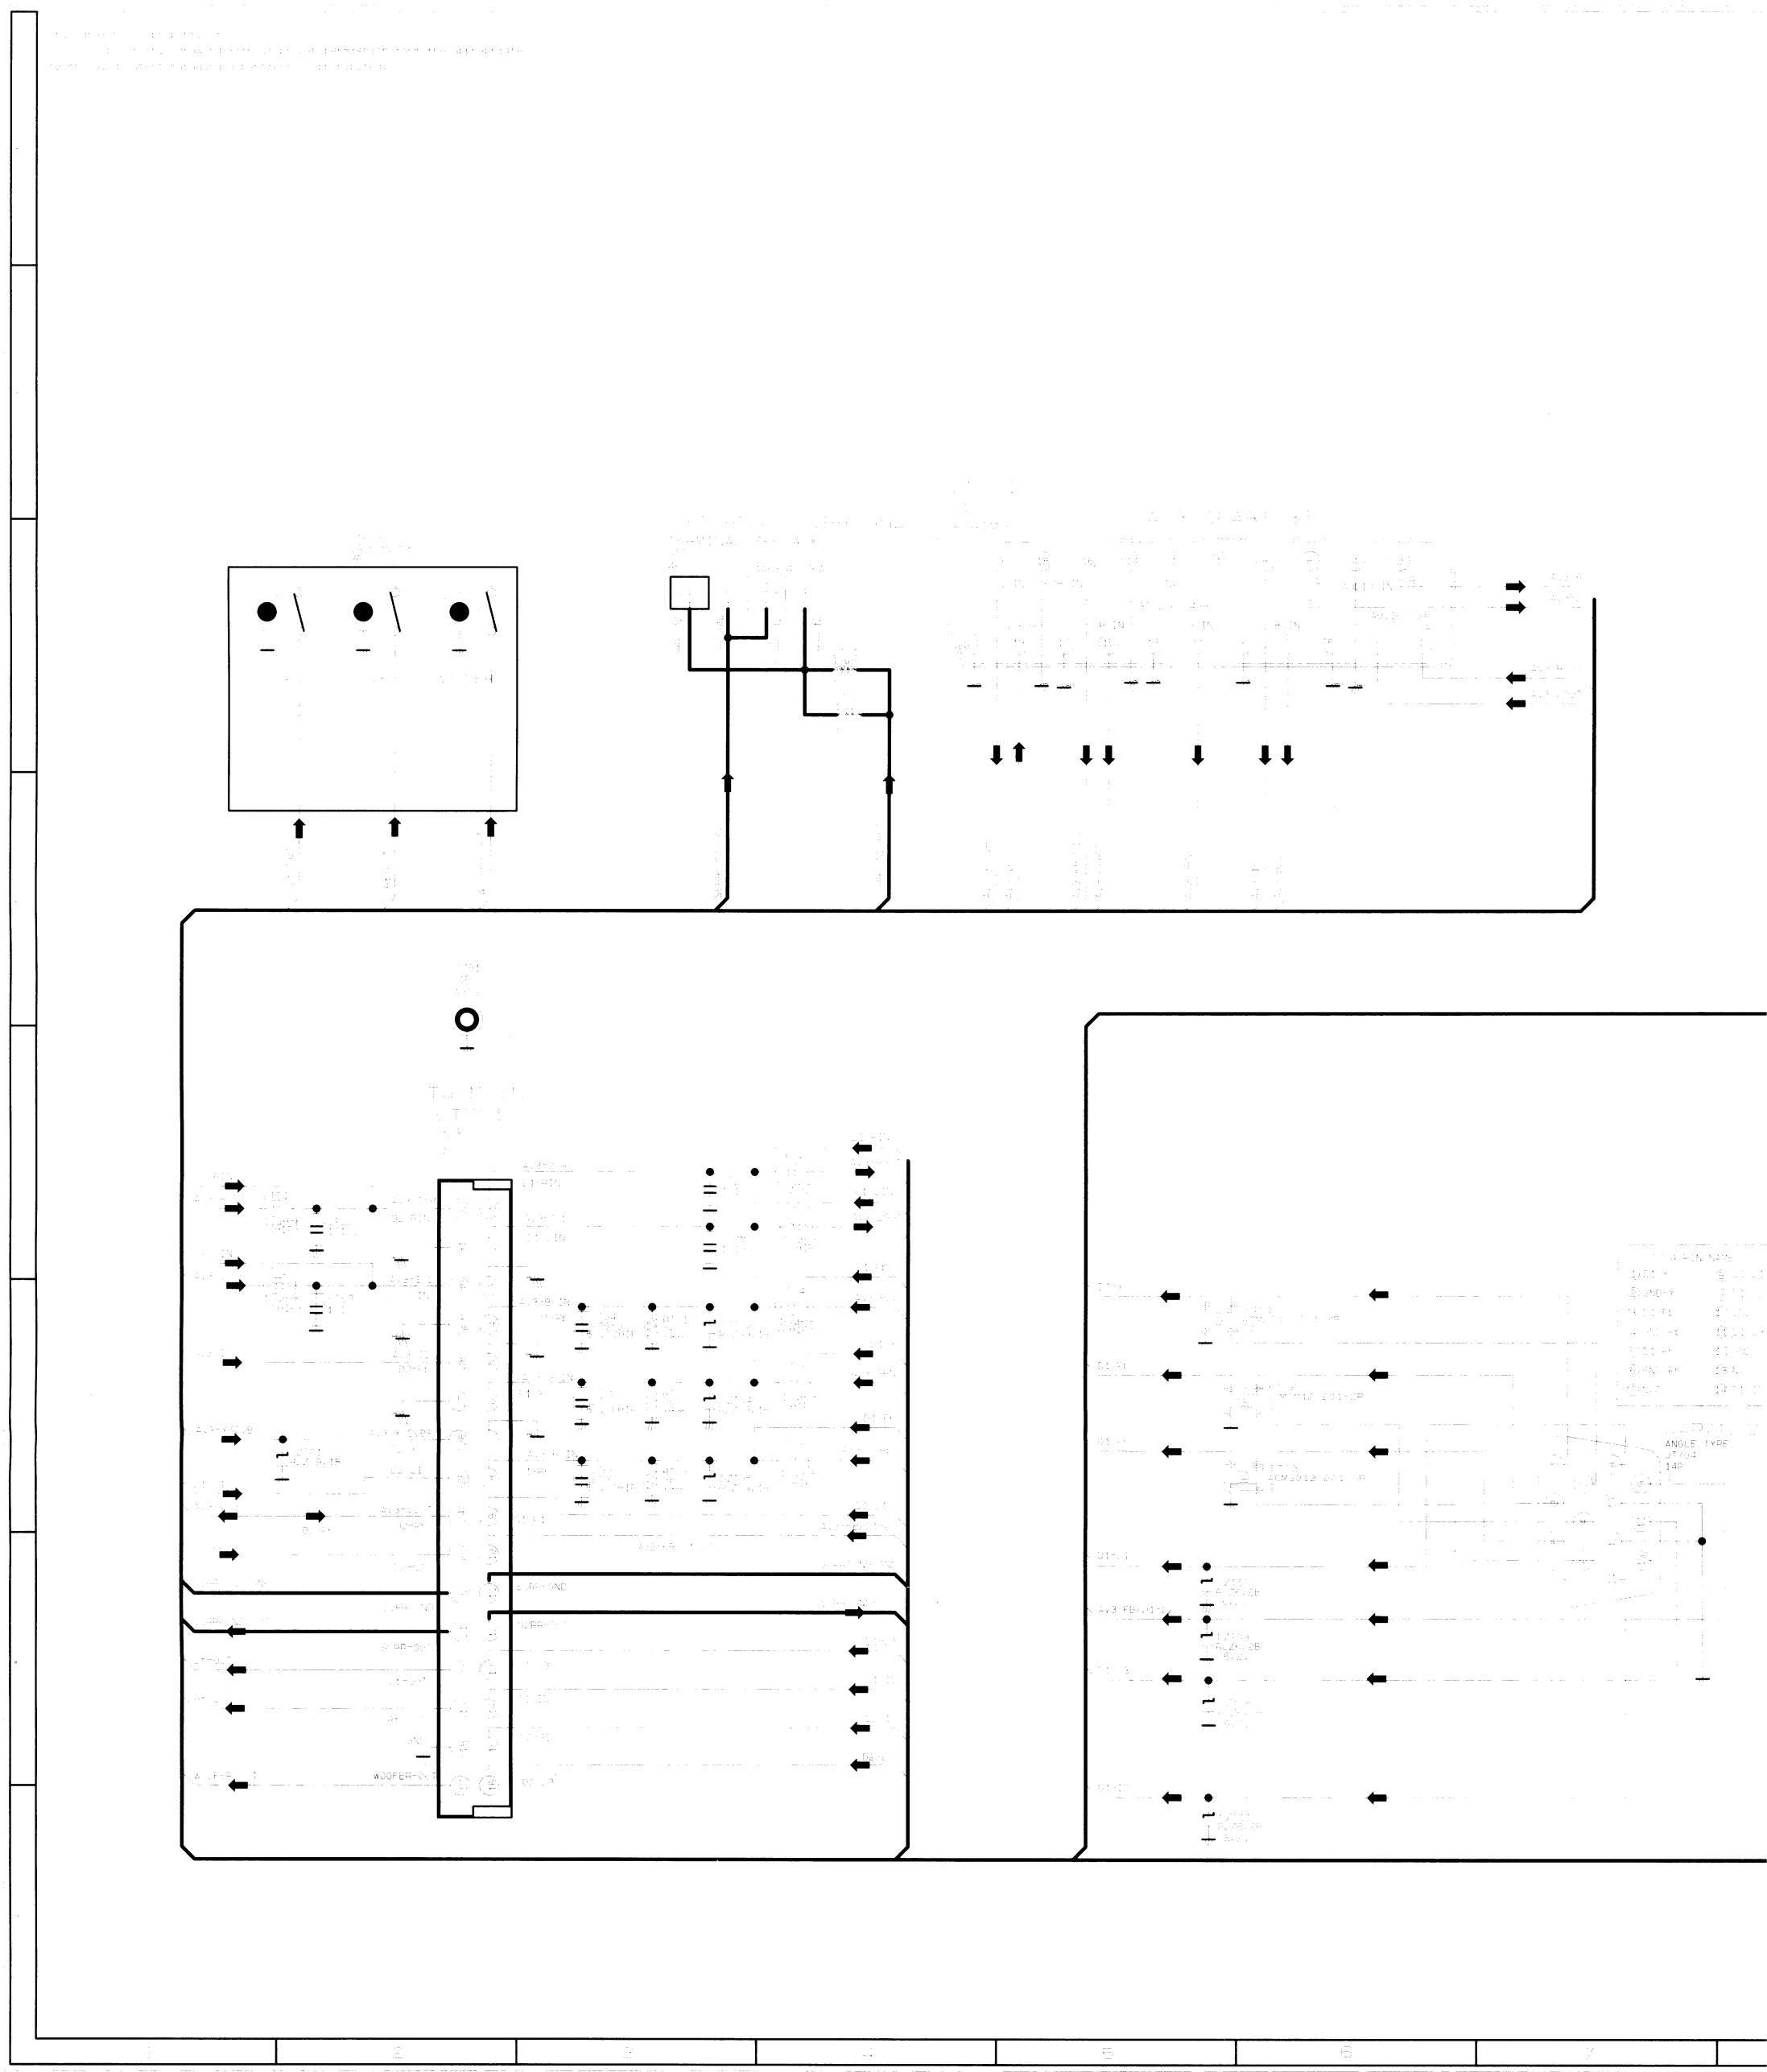

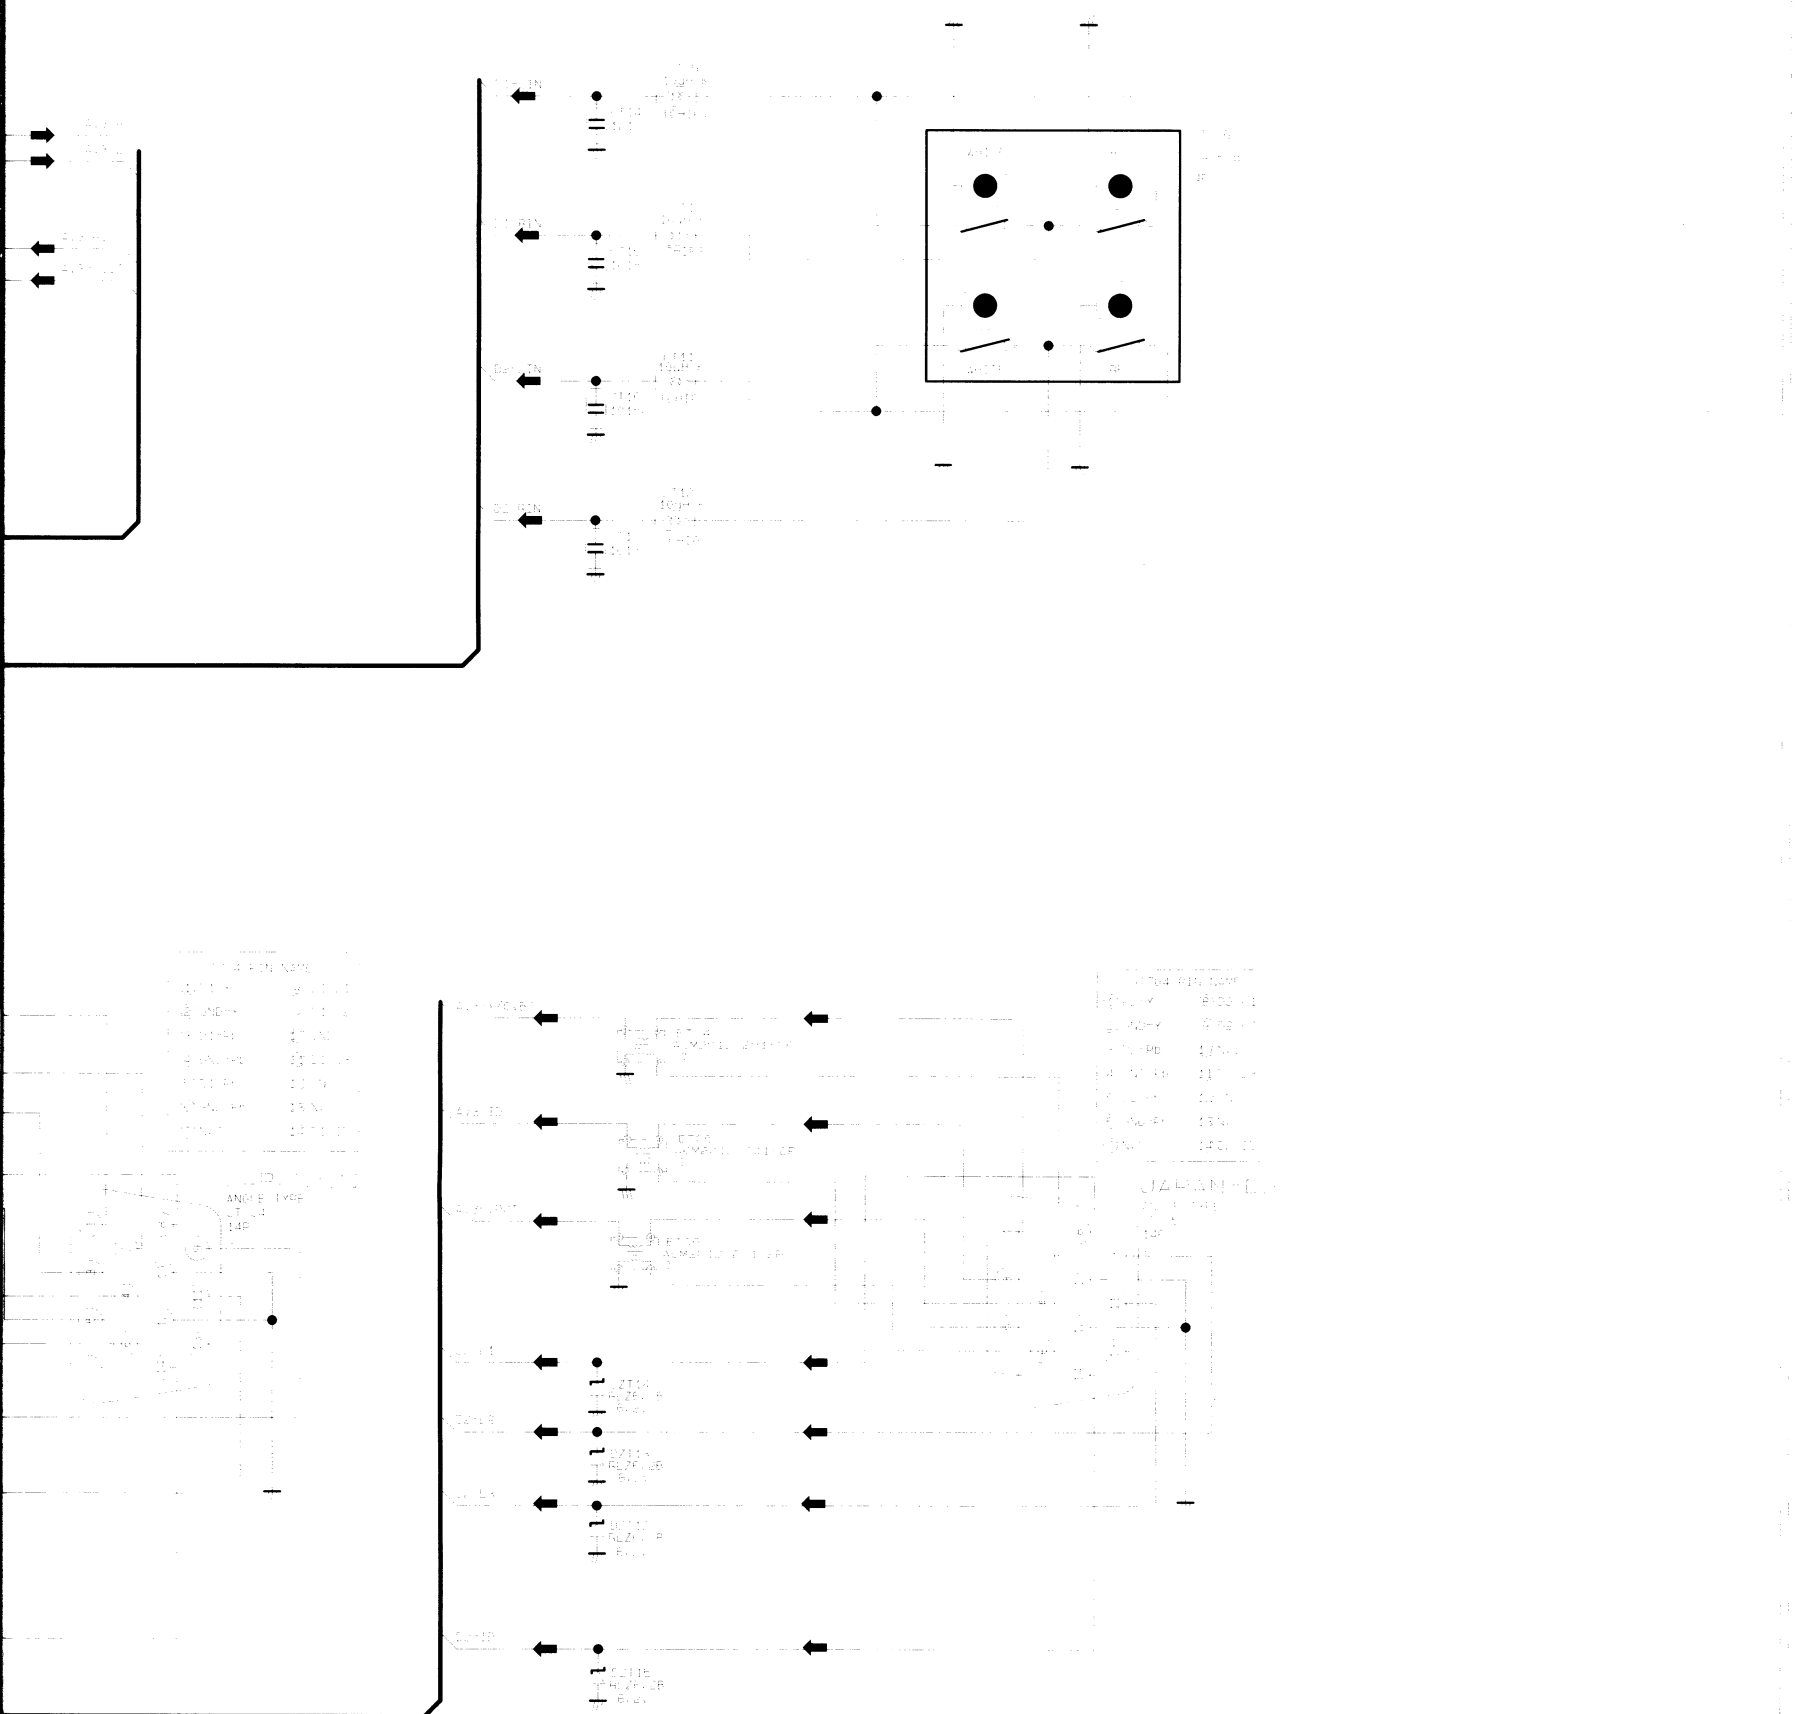

5-14 DIGITAL-1

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

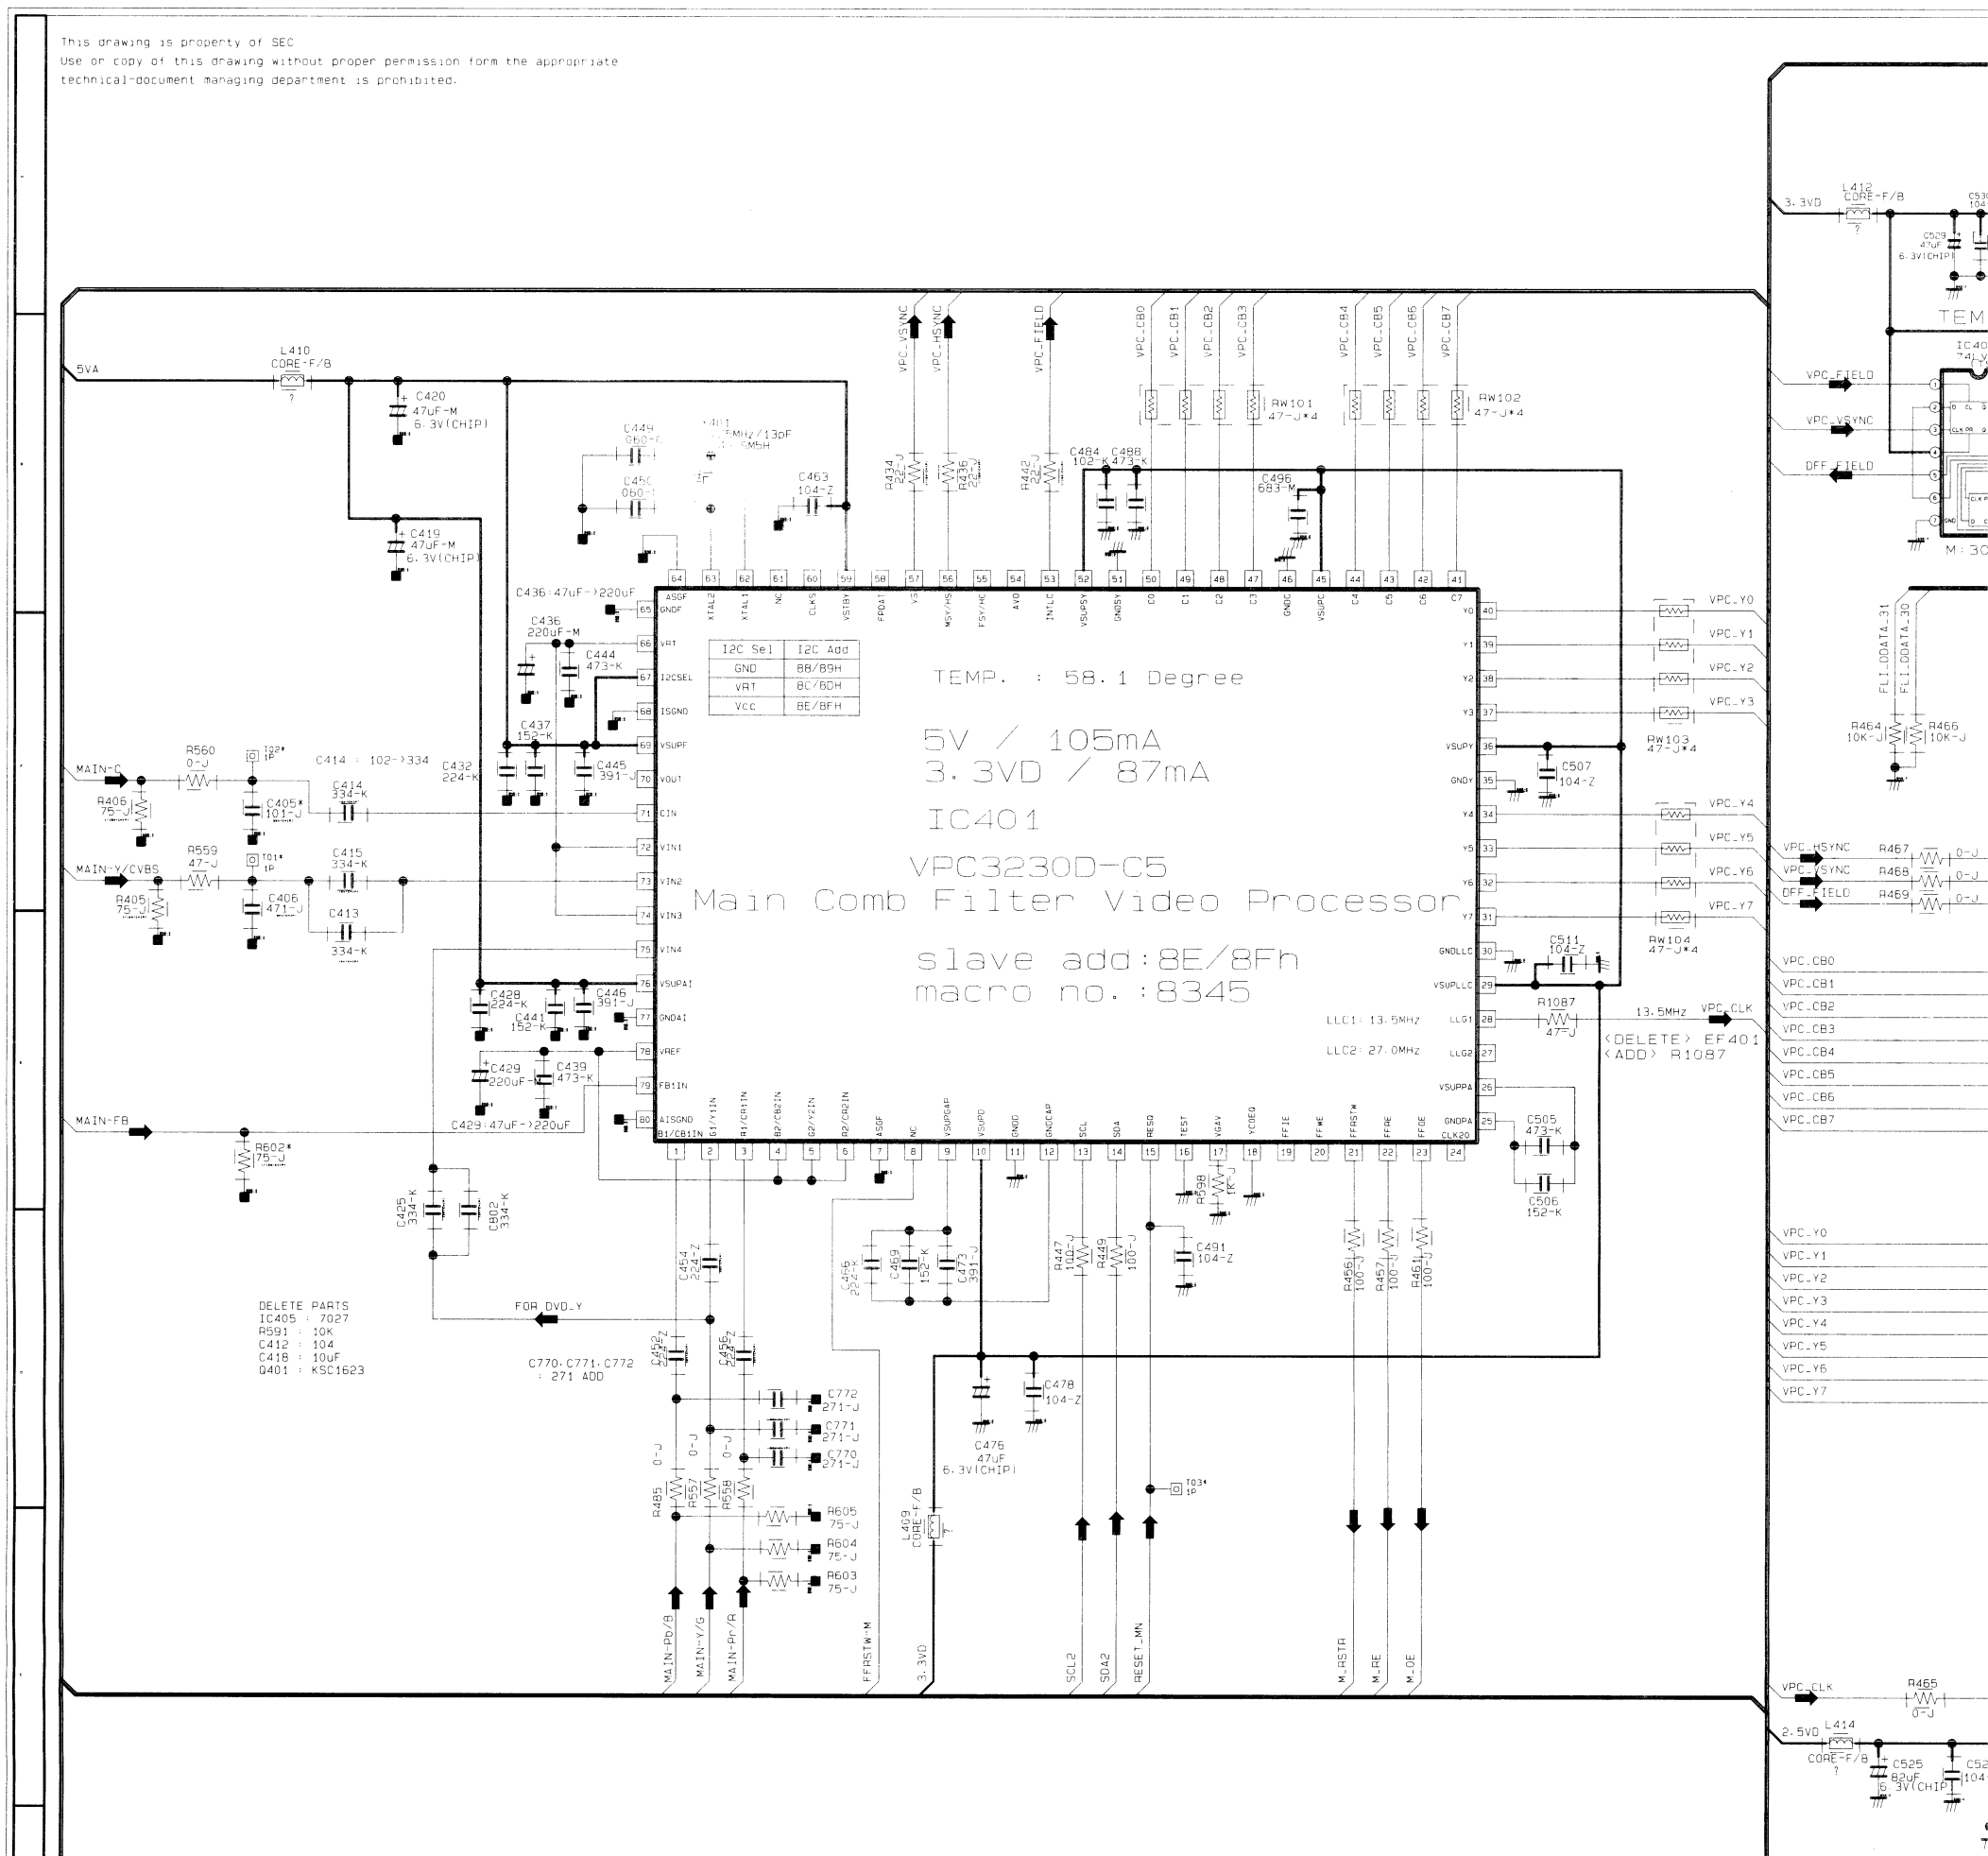

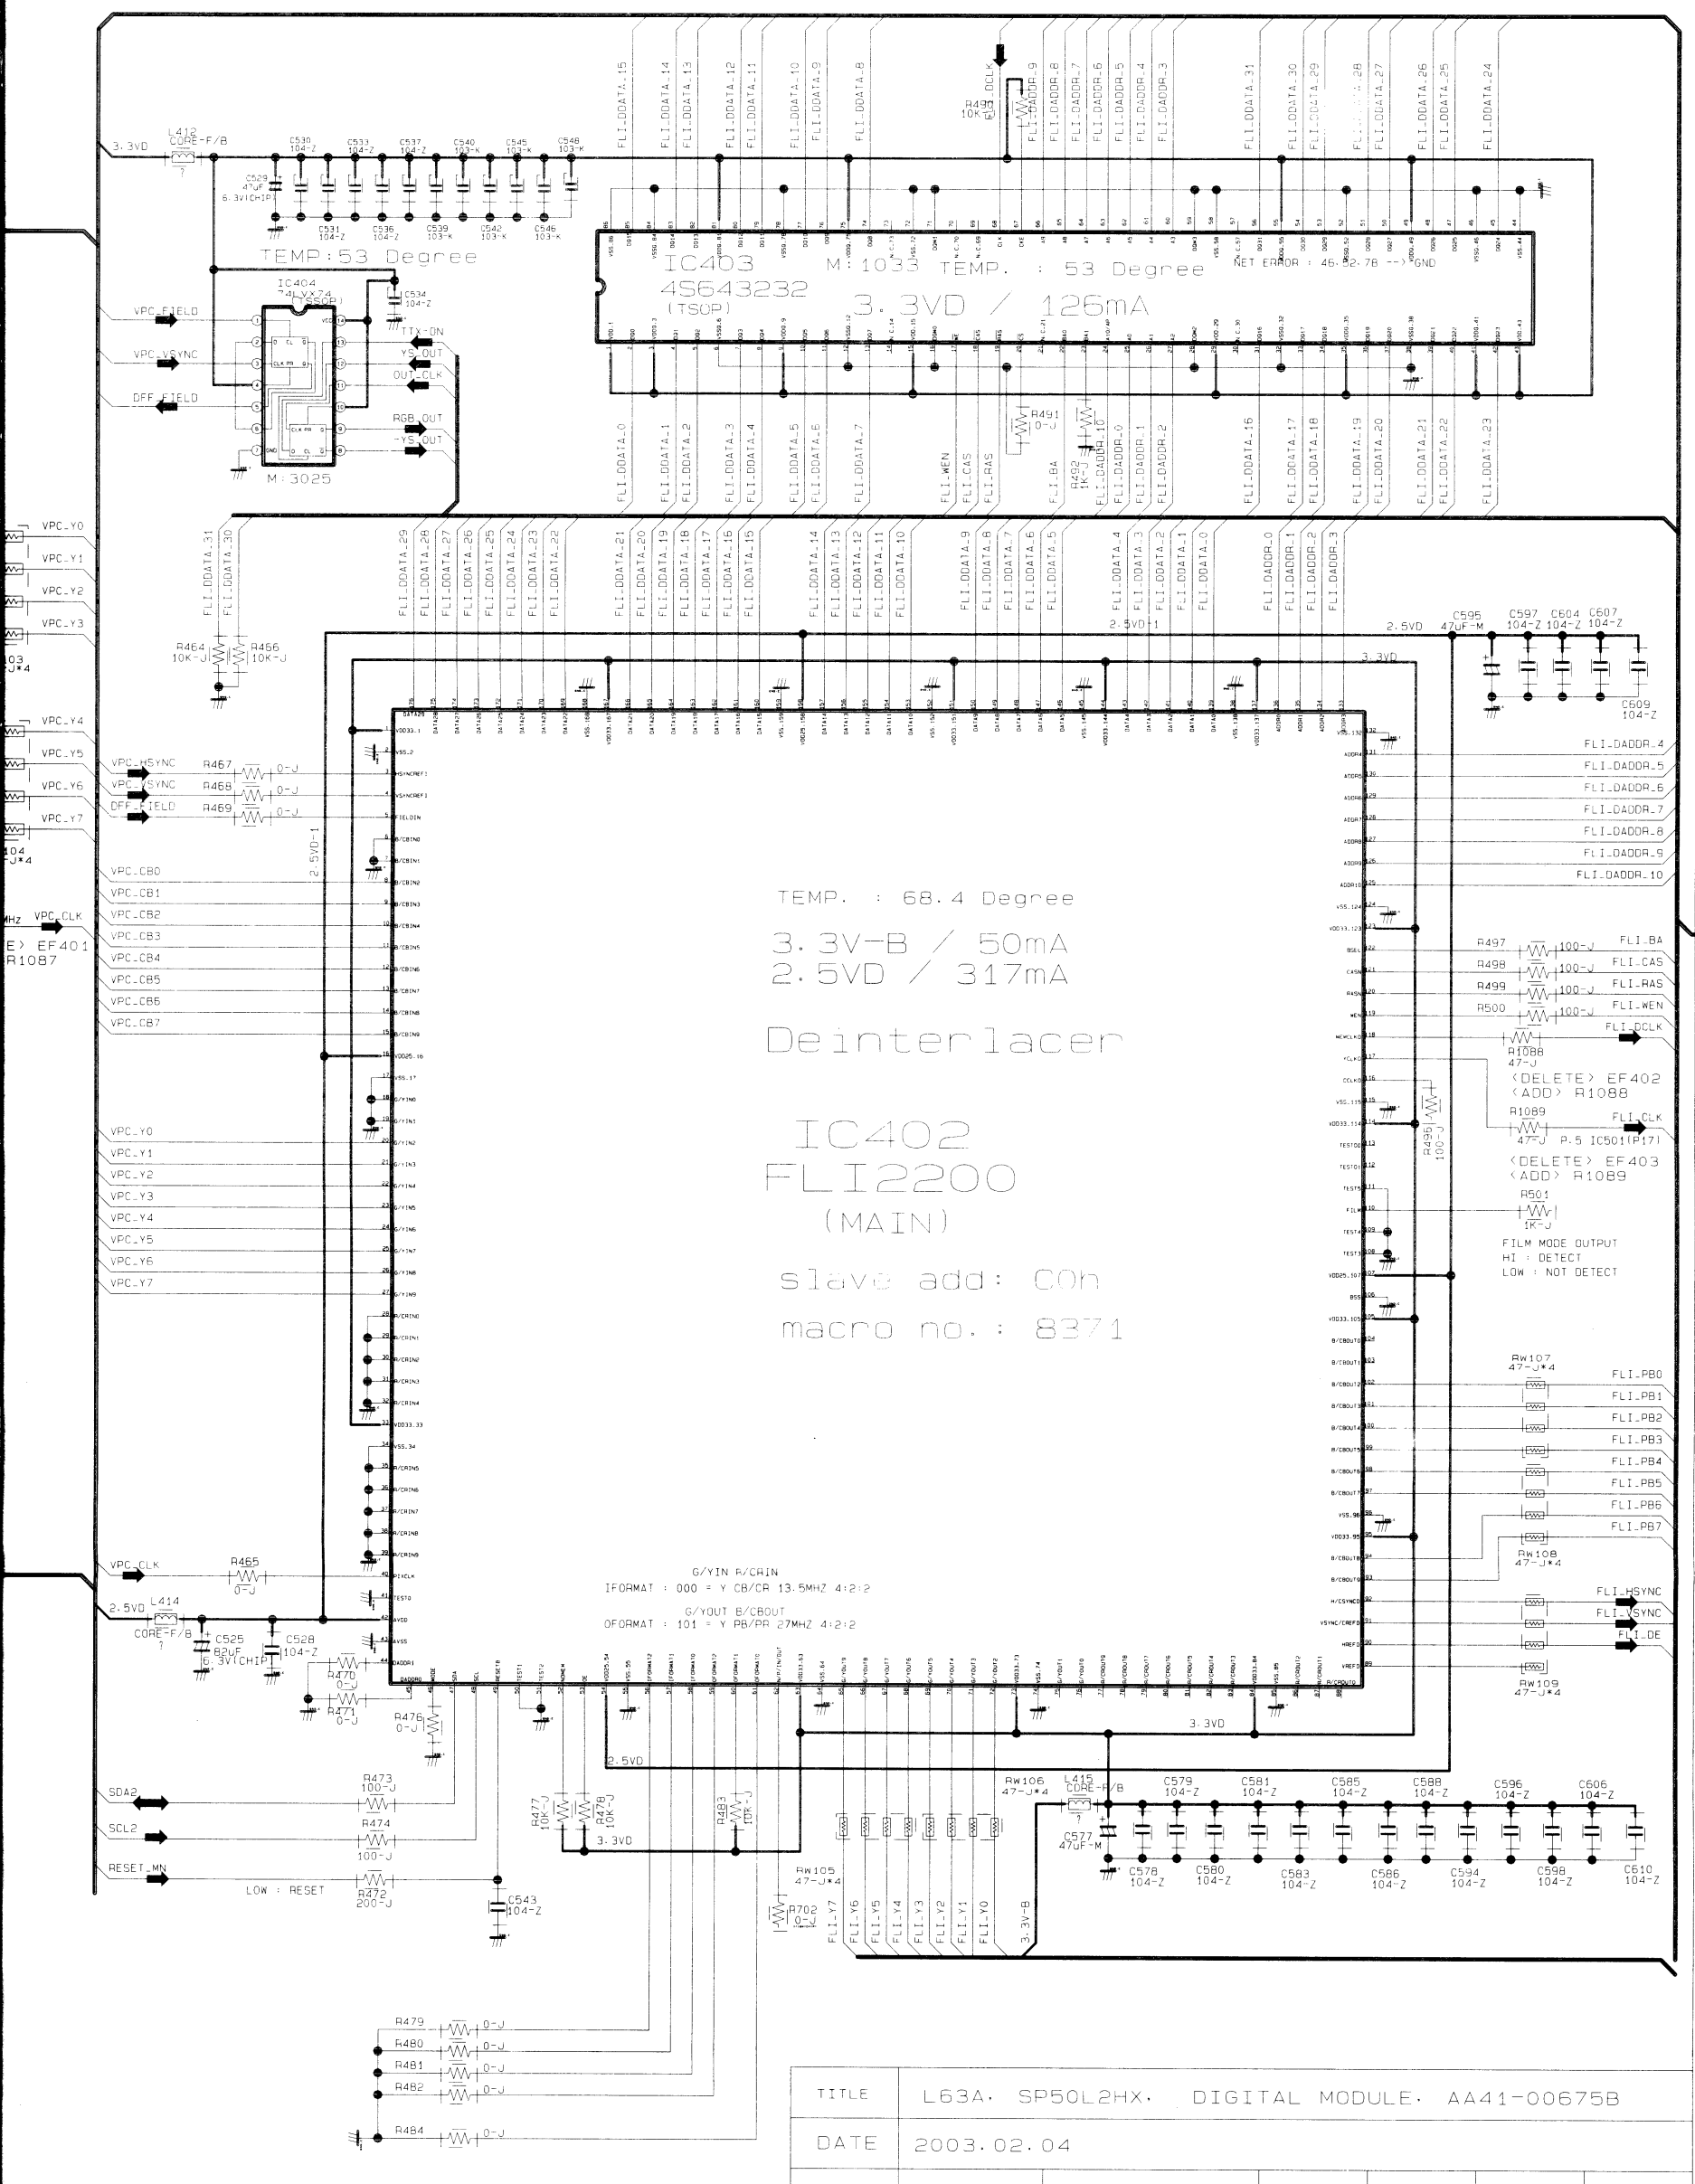
TEMP : 68.4 Degree
3.3V-B / 50mA
2.5VD / 317mA
Deinterlacer
IC402
FLI2200
(MAIN)
slave add : C0h
macro no. : 8371
G/YIN B/CAIN
IFORMAT : 000 = Y CB/CR 13.5MHZ 4:2:2
G/YOUT B/CBOUT
OFORMAT : 101 = Y PB/PR 27MHZ 4:2:2
IC403
4S643232
(TSOP)
M:1035 TEMP. : 53 Degree
3.3VD / 126mA
TEMP:53 Degree
IC404
74LVX74
(SSOP)
M:3025
TITLE
L63A. SP50L2HX. DIGITAL MODULE. AA41-00675B
DATE
2003.02.04
SAMSUNG
Doc. CODE
DS020130-0003
Rev. No
SHEET NO
3 /8

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

TEMP. : 60.4 Degree

2.5VD / 620mA
3.3V-B / 54mA

IC601
ASI500 1204-001990
(BGA)

8bit PARALLEL COMMMUNICATION
slave add: 0x/09h
macro no. : 1005

u-COM INTERFACE

AURORA	DESCRIPTION	M2
AD[0..7]	DATA/ADDRESS	MCAD[0..7]
ALE	DATA/ADD SELECT	MCALE
RD#	READ ENABLE	/MCRD2
WR#	WRITE ENABLE	/MCWR2
CS	CHIP SELECT	MCAB
INT#	SYSTEM INTERRUPT	MC_INT
RESET	RESET	RESET_Mn

ASI500 mismatching

AD9888 ---> ASI500

R ------> Y
G ------> Pr
B ------> Pb

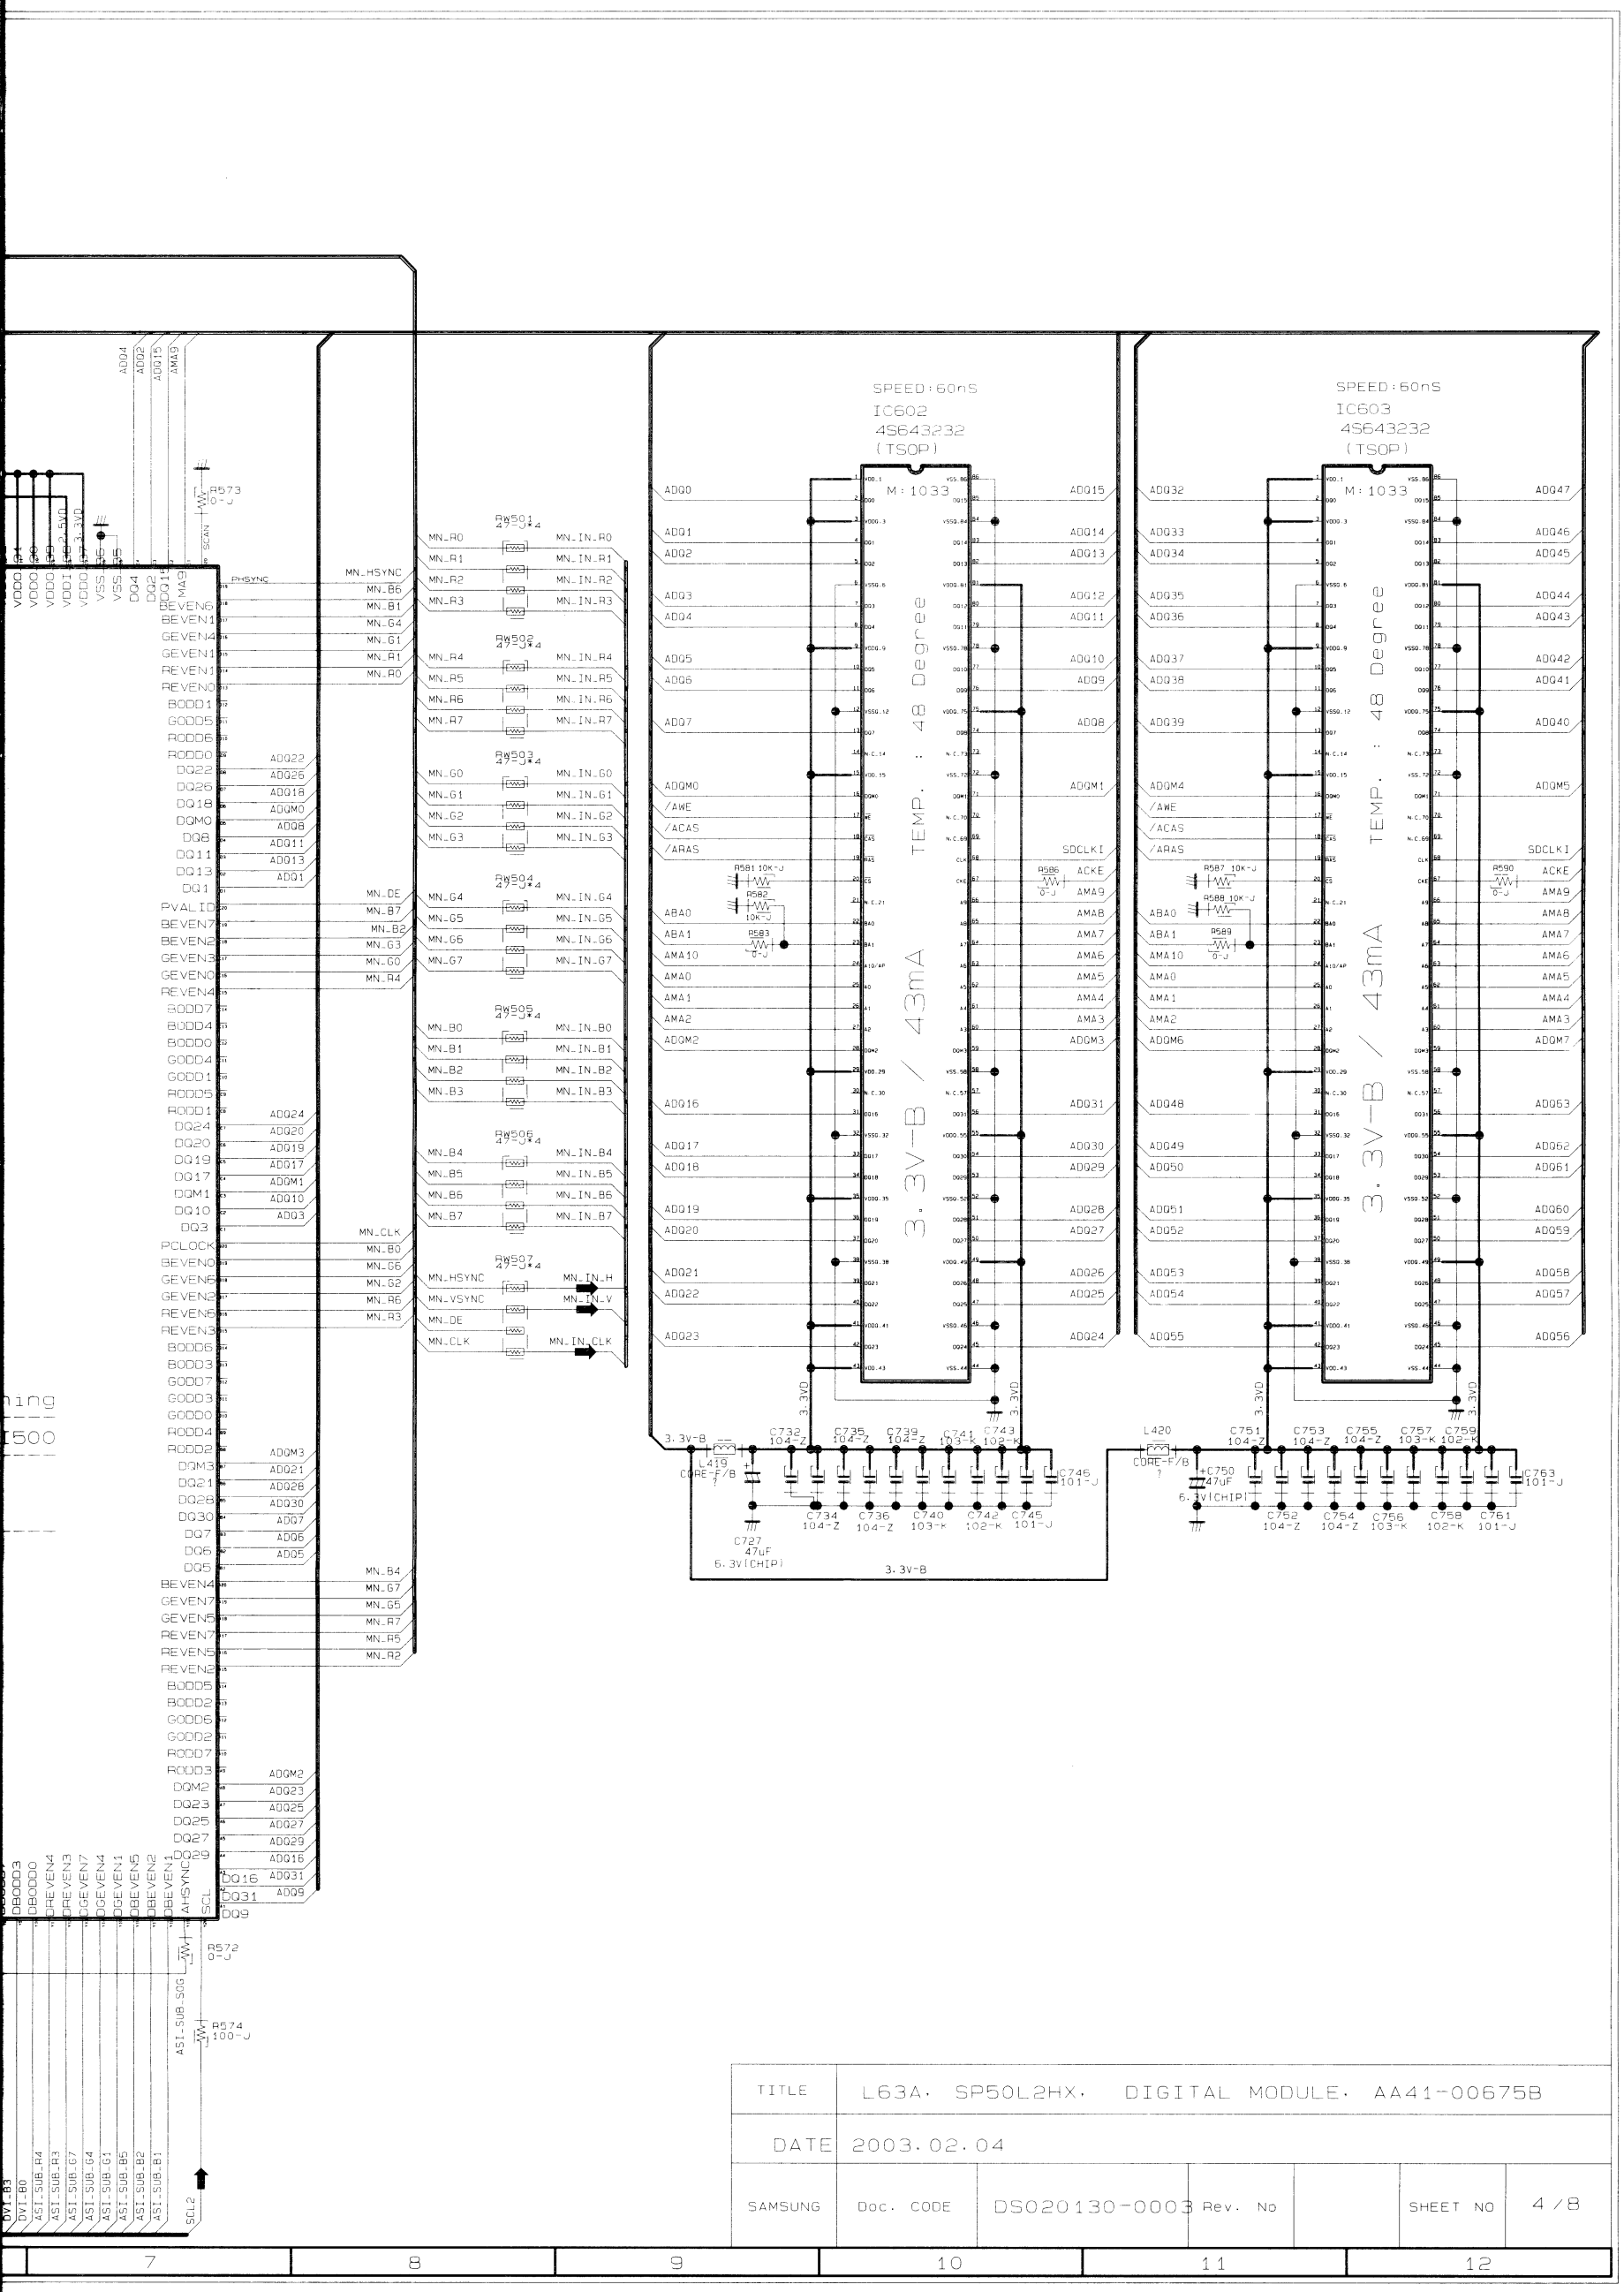

TITLE	L63A. SP50L2HX. DIGITAL MODULE. AA41-00675B						
DATE	2003.02.04						
SAMSUNG	Doc. CODE	DS020130-0003	Rev. No		SHEET NO	4/8	

7	8	9	10	11	12

5-16 DIGITAL-3

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

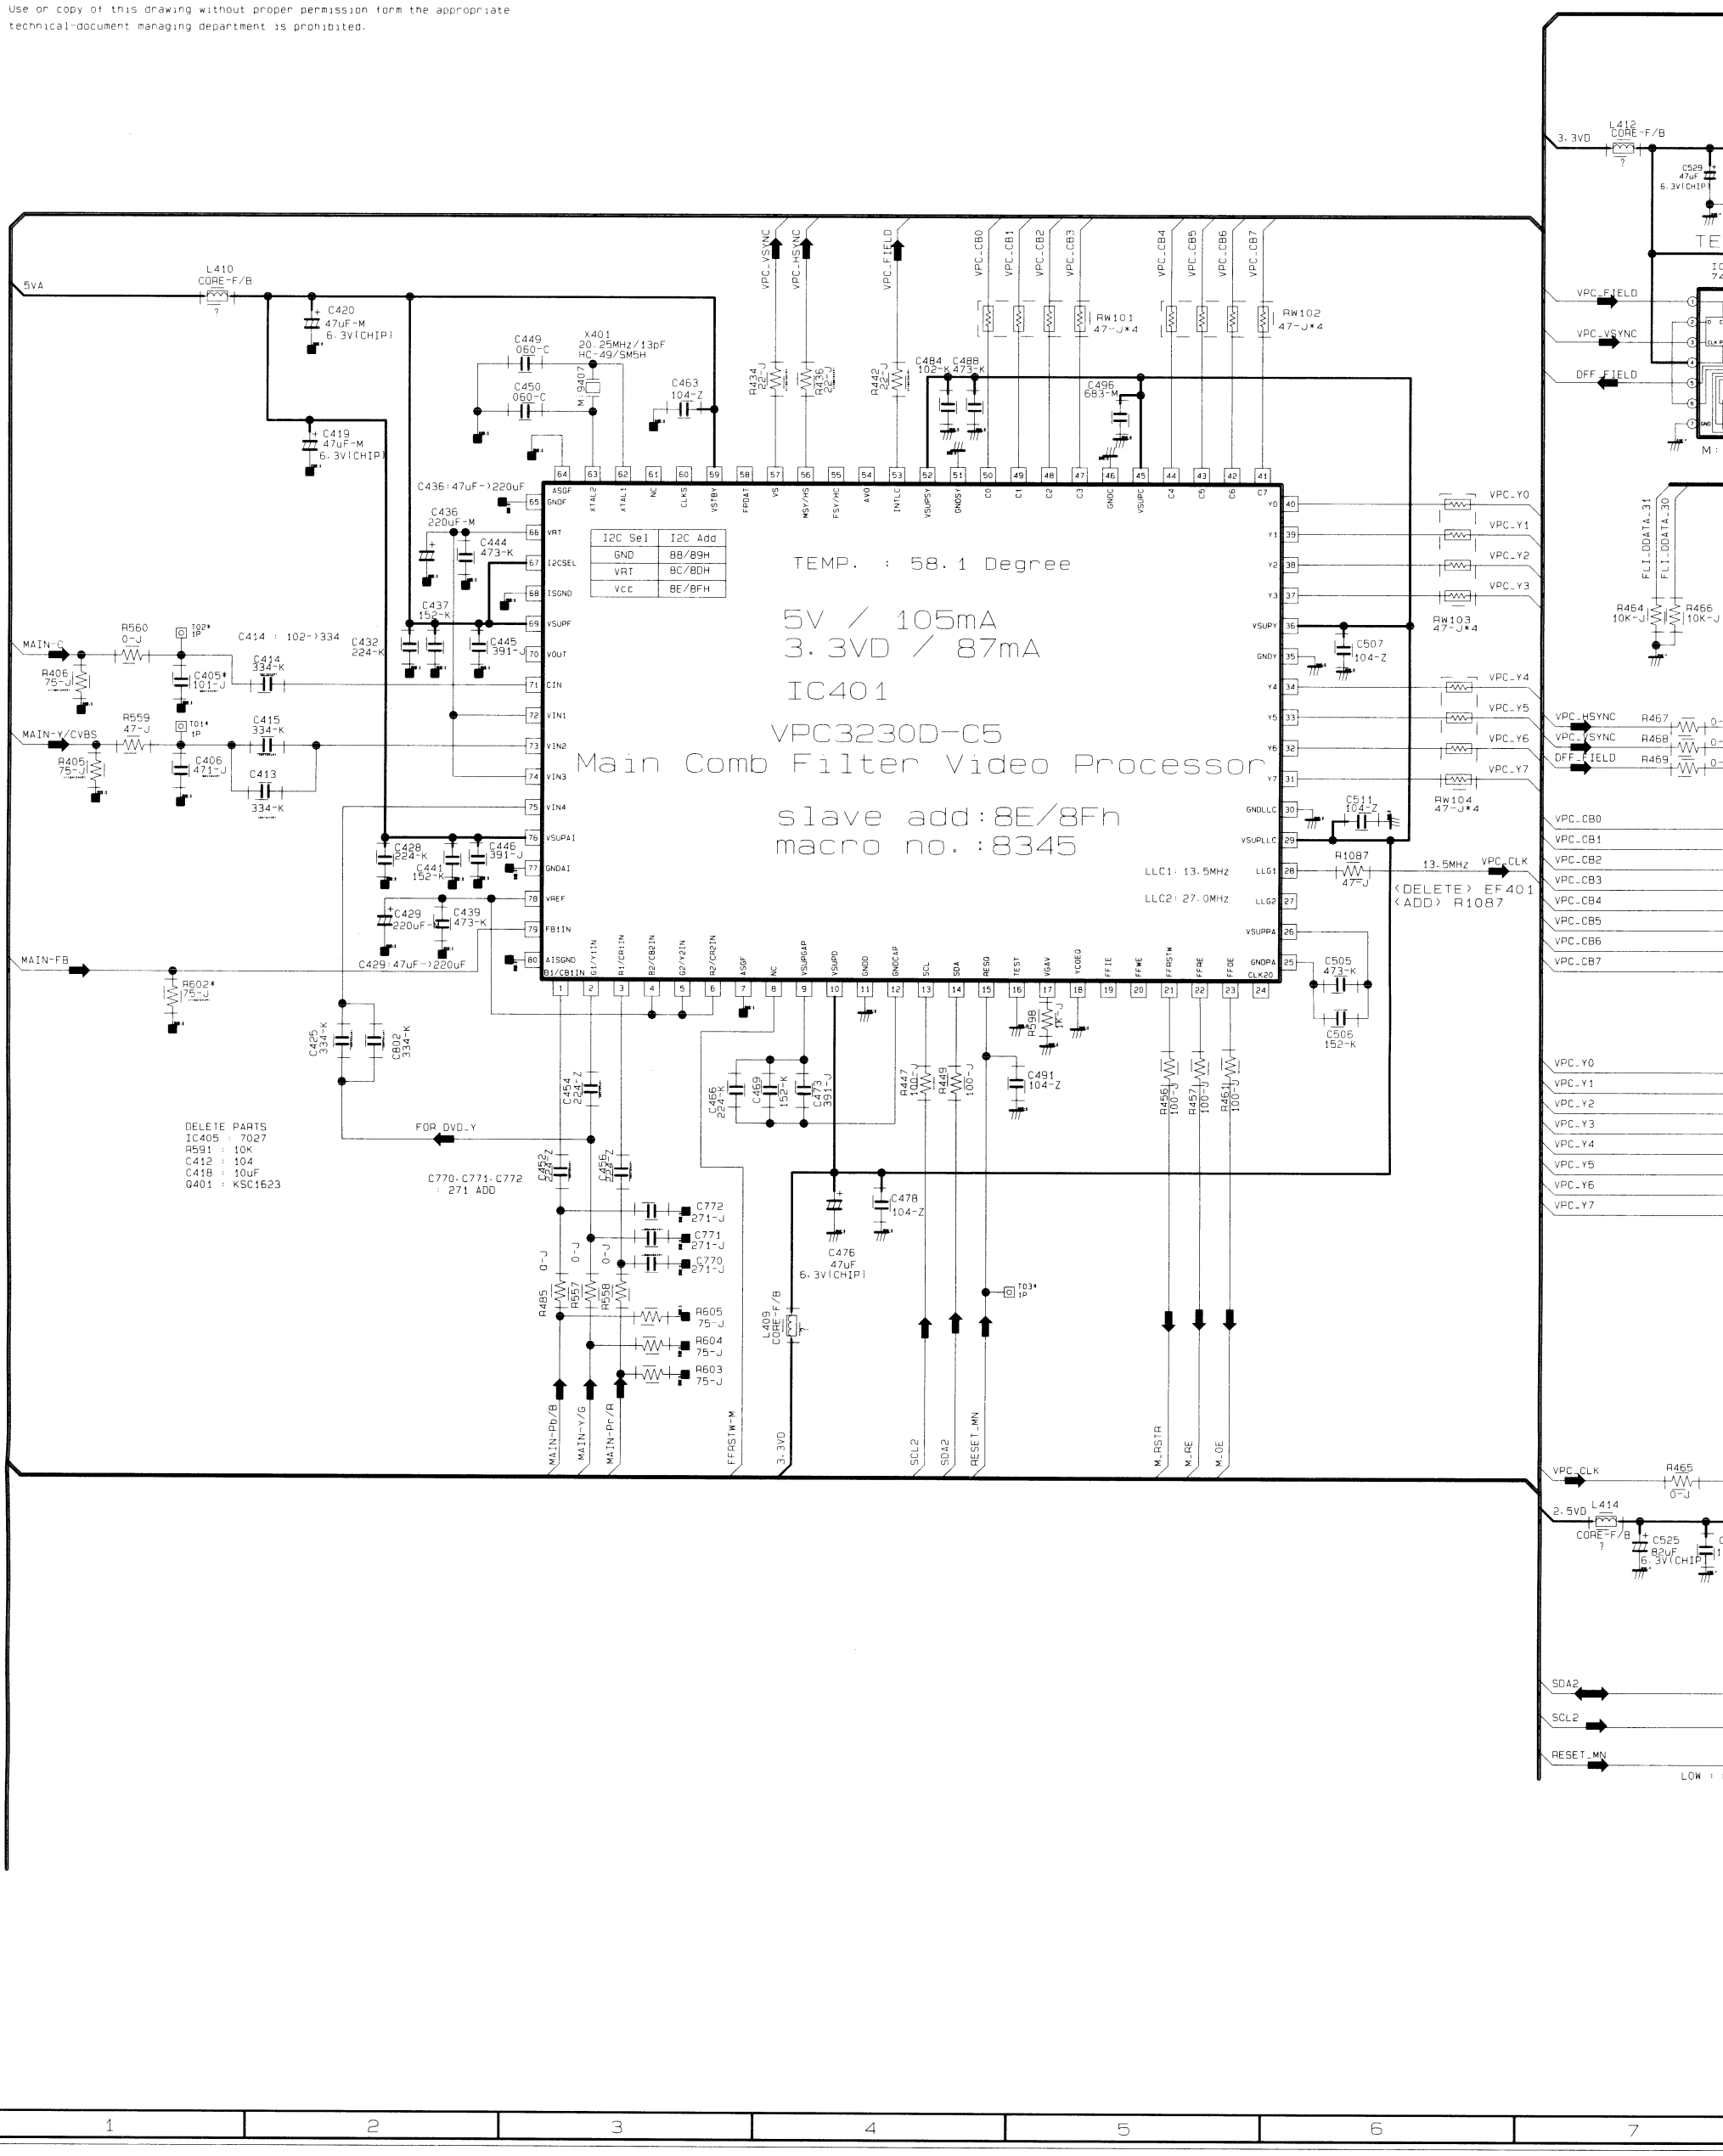

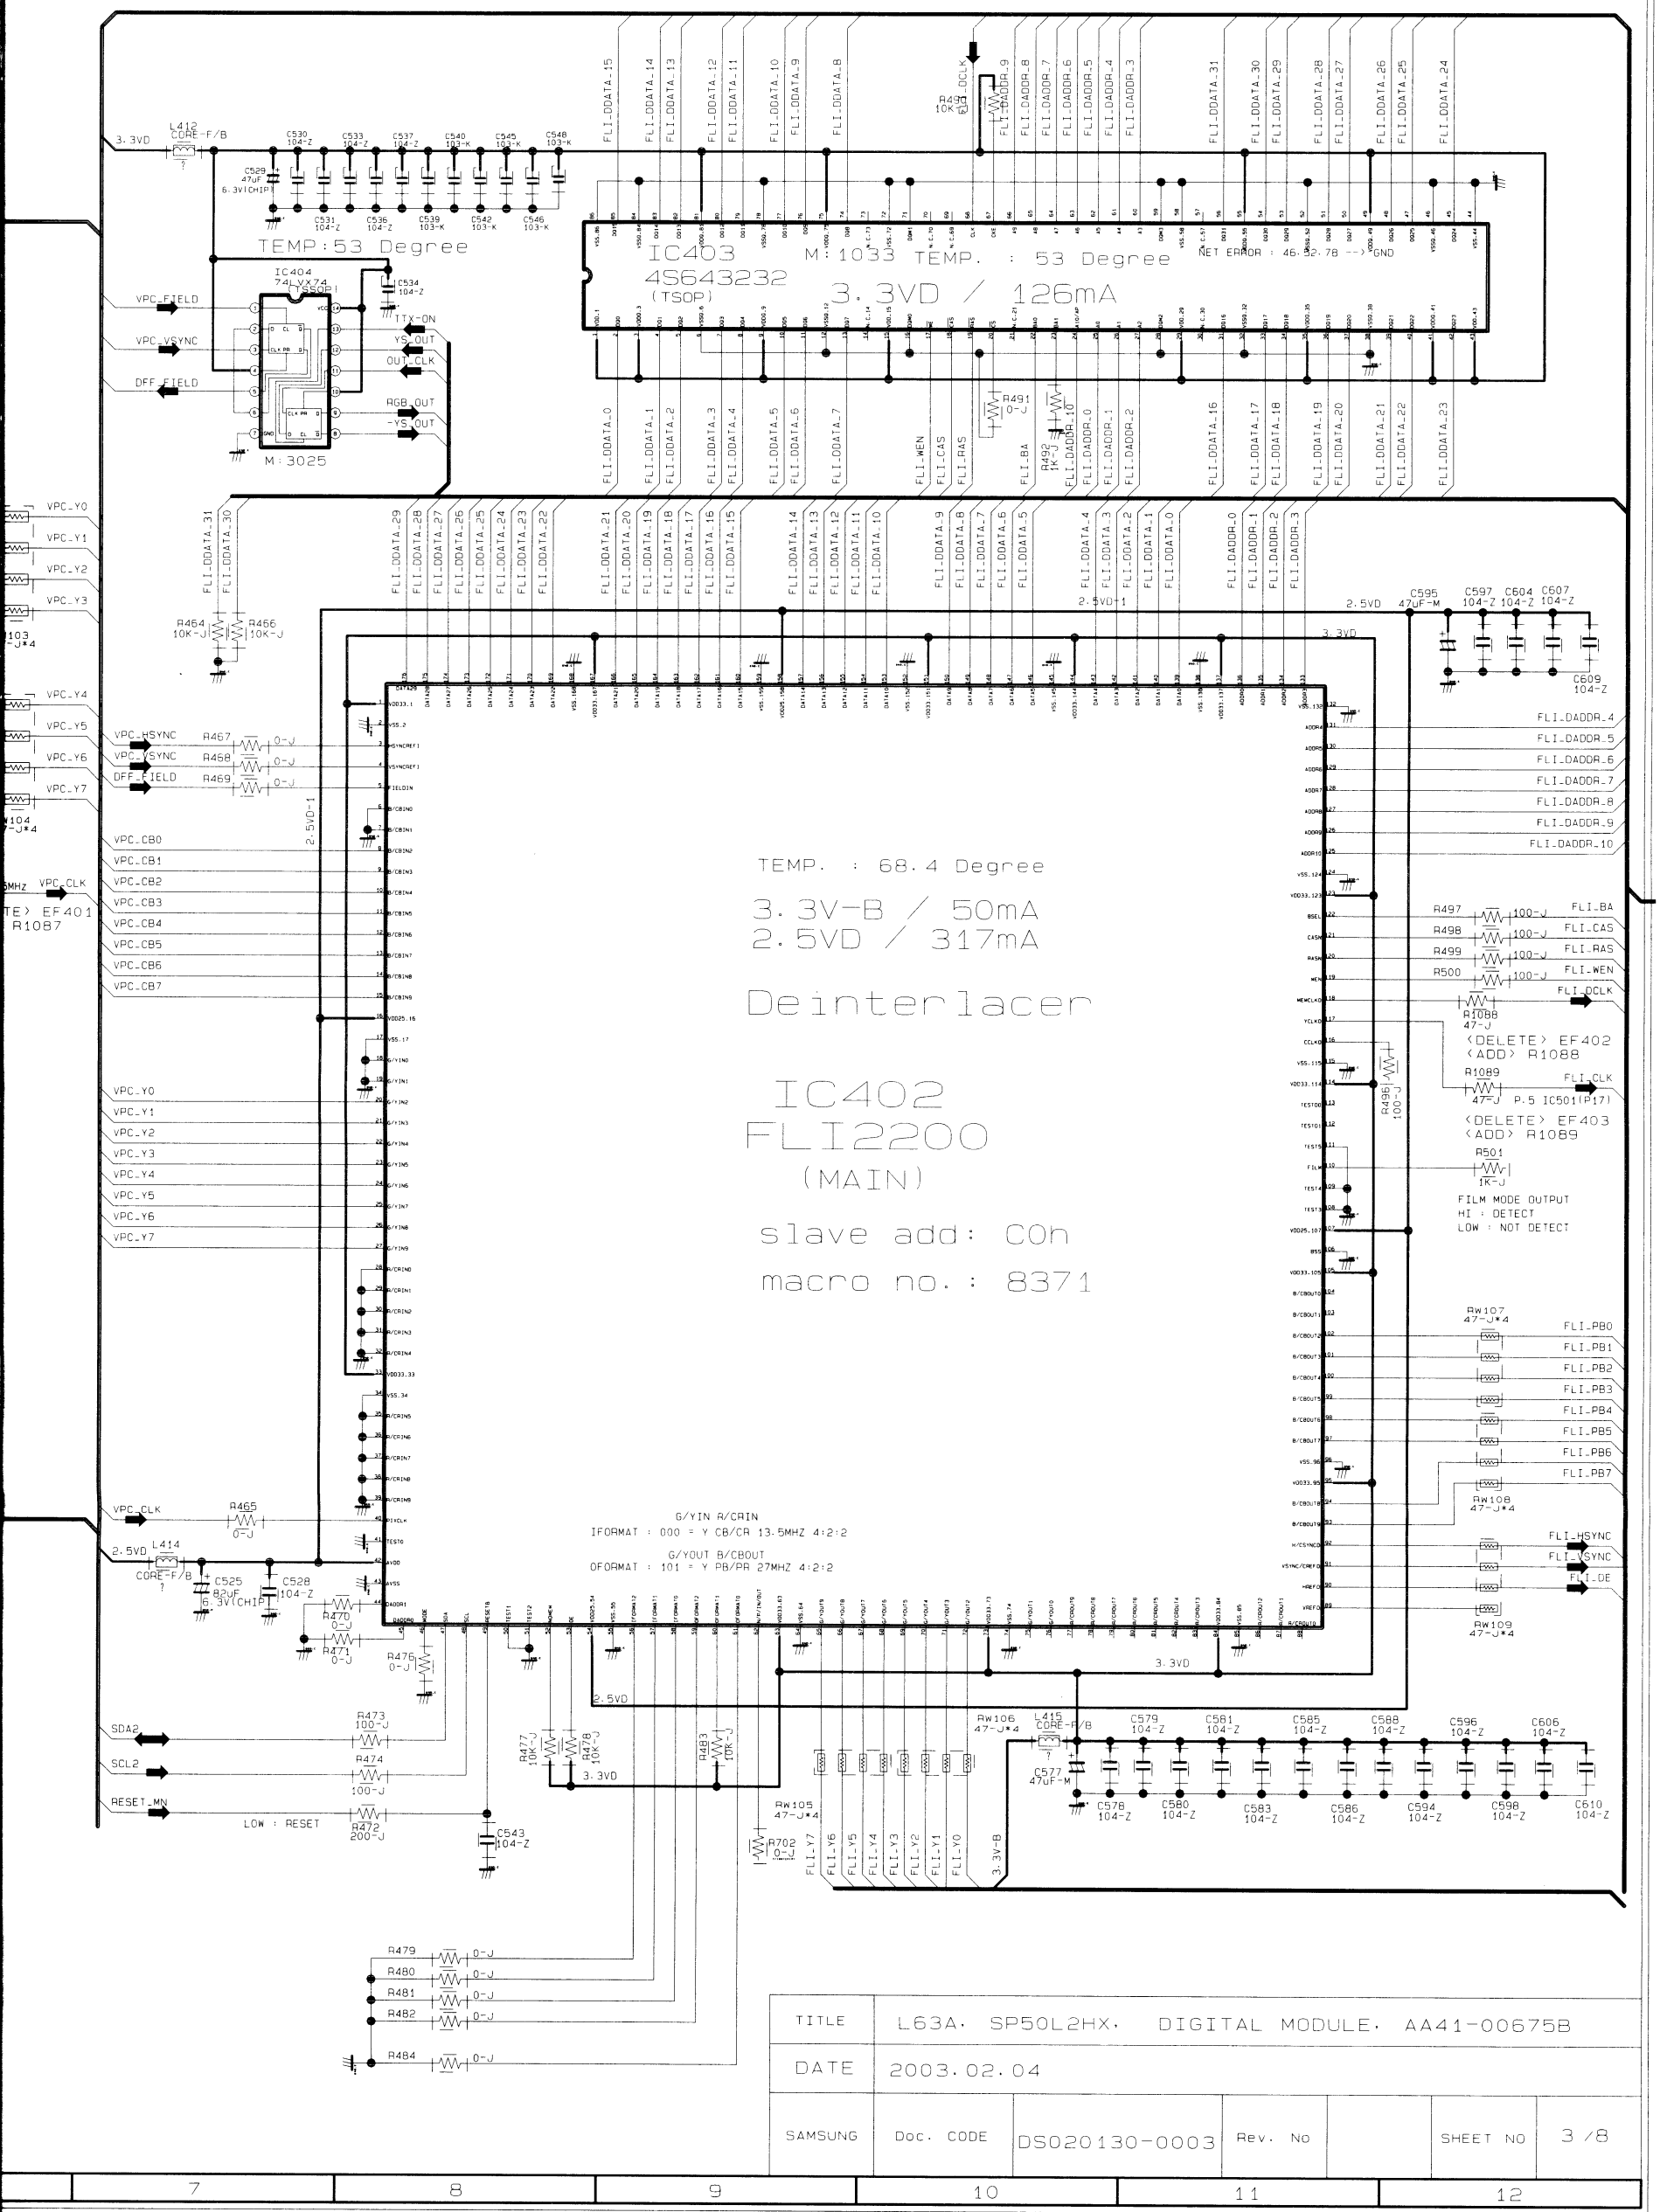
IC403
4S643232
(TSOP)
M:1033 TEMP. : 53 Degree
3.3VD / 126mA
NET ERROR : 46.52.78 --> GND
IC404
74LVX74
(TSSOP)
M:3025
TEMP:53 Degree
TEMP. : 68.4 Degree
3.3V-B / 50mA
2.5VD / 317mA
Deinterlacer
IC402
FLI2200
(MAIN)
slave add: C0h
macro no. : 8371
IFORMAT : 000 = Y CB/CR 13.5MHZ 4:2:2
OFORMAT : 101 = Y PB/PR 27MHZ 4:2:2
G/YIN R/CRIN
G/YOUT B/CBOUT
(DELETE) EF402
(ADD) R1088
(DELETE) EF403
(ADD) R1089
FILM MODE OUTPUT
HI : DETECT
LOW : NOT DETECT
LOW : RESET
TITLE L63A. SP50L2HX. DIGITAL MODULE. AA41-00675B
DATE 2003.02.04
SAMSUNG Doc. CODE DS020130-0003 Rev. No SHEET NO 3/8

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

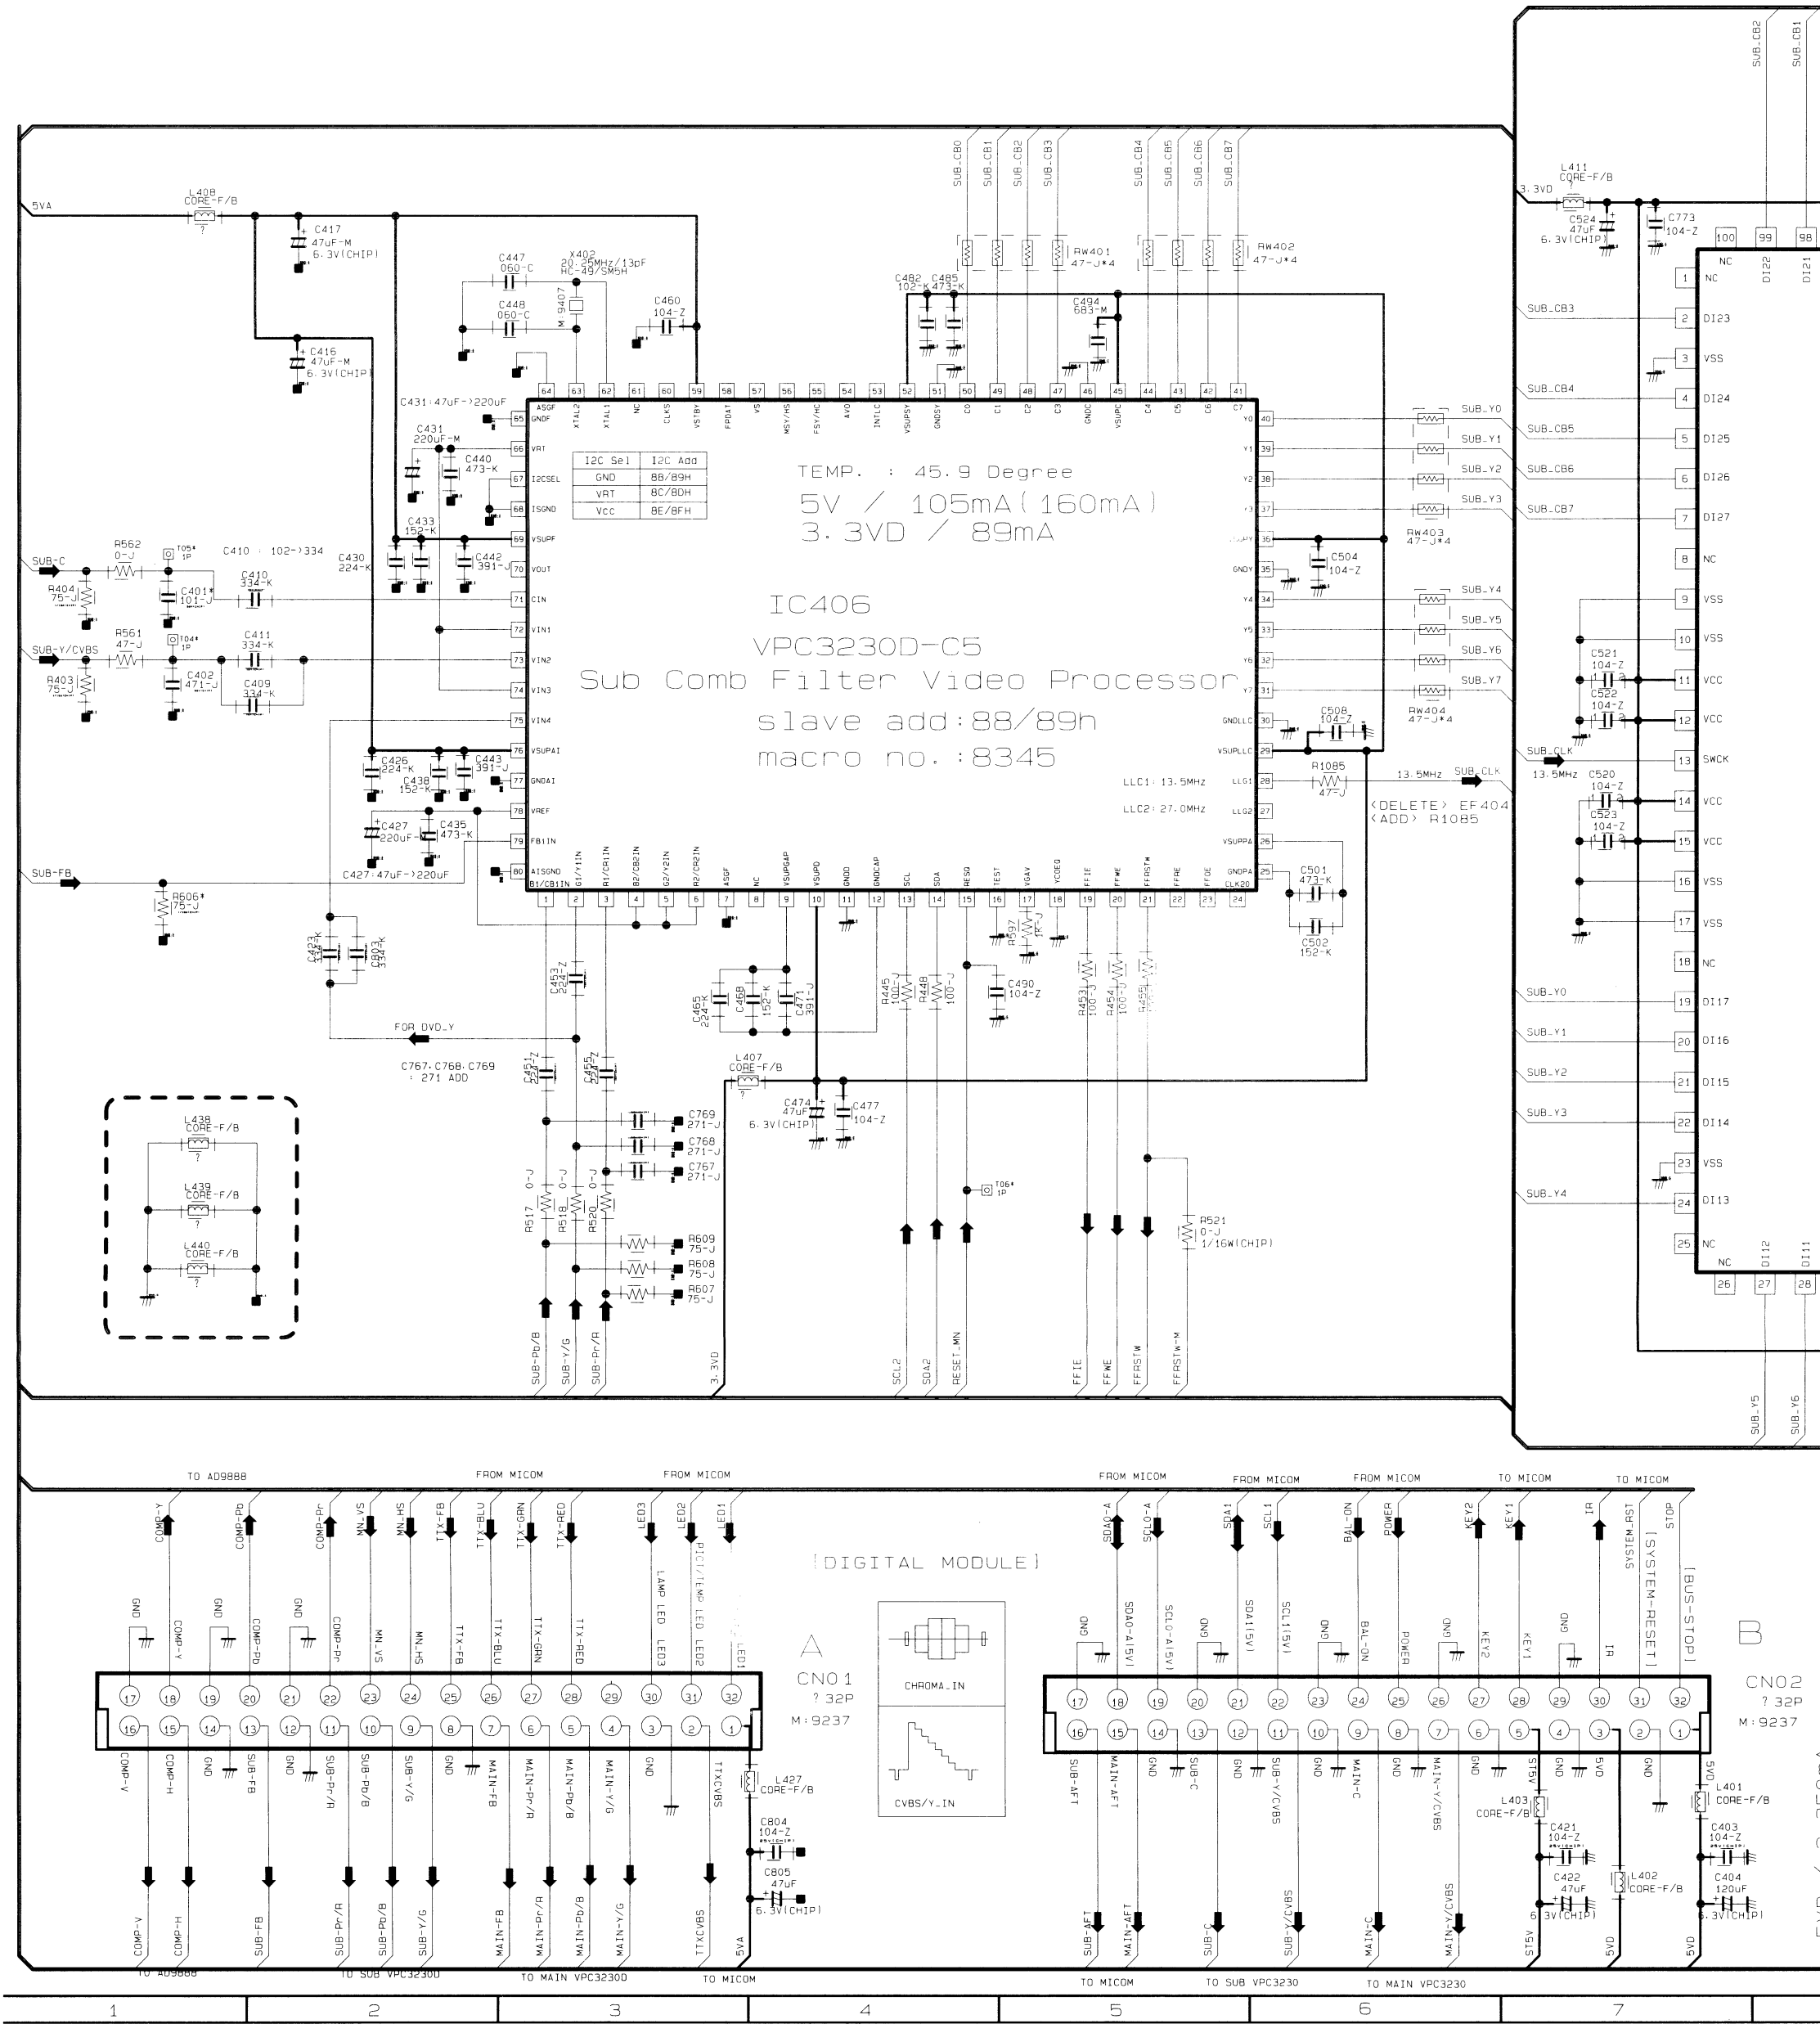

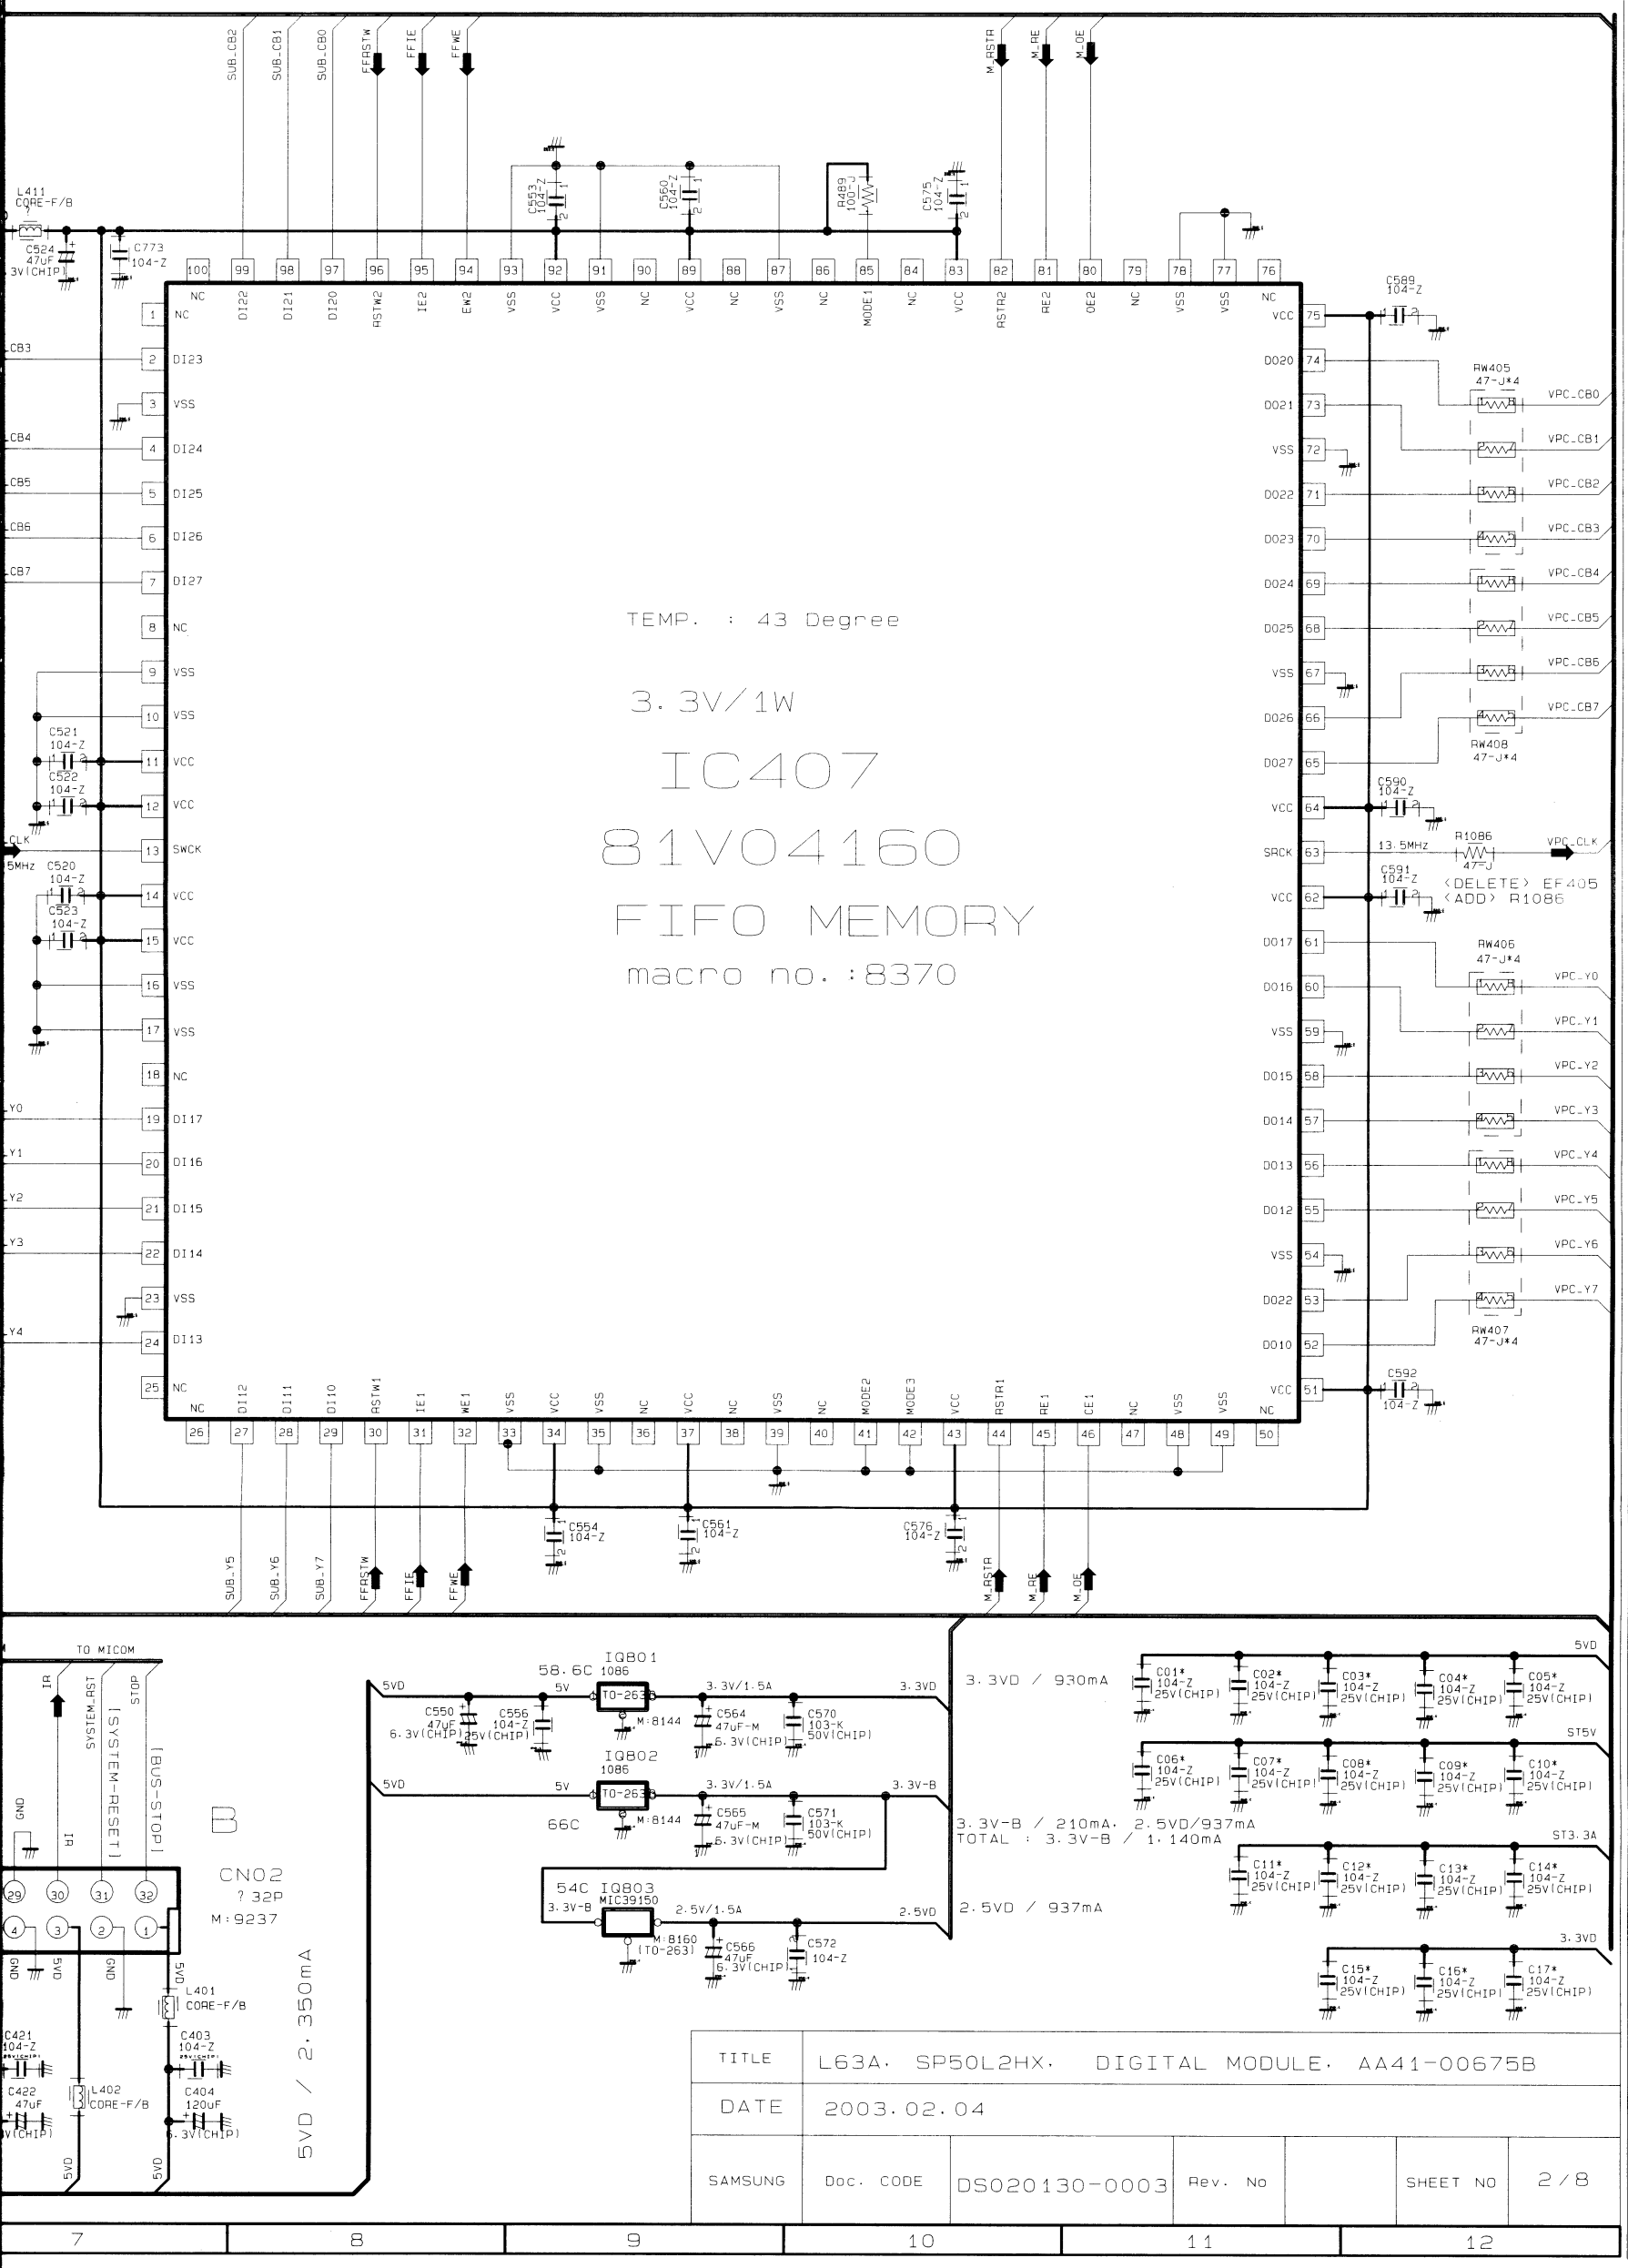

TITLE	L63A. SP50L2HX. DIGITAL MODULE. AA41-00675B					
DATE	2003.02.04					
SAMSUNG	Doc. CODE	DS020130-0003	Rev. No		SHEET NO	2/8

7	8	9	10	11	12

5-18 DIGITAL-5

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

IC604
SNI

3.3VD / 100mA
2.5VD / 200mA

slave add: C8/C9h

macro no.:8335

1003-001503

ADDR1-0
00 : C8/C9
01 : CA/CB
10 : CC/CD
11 : CE/CF

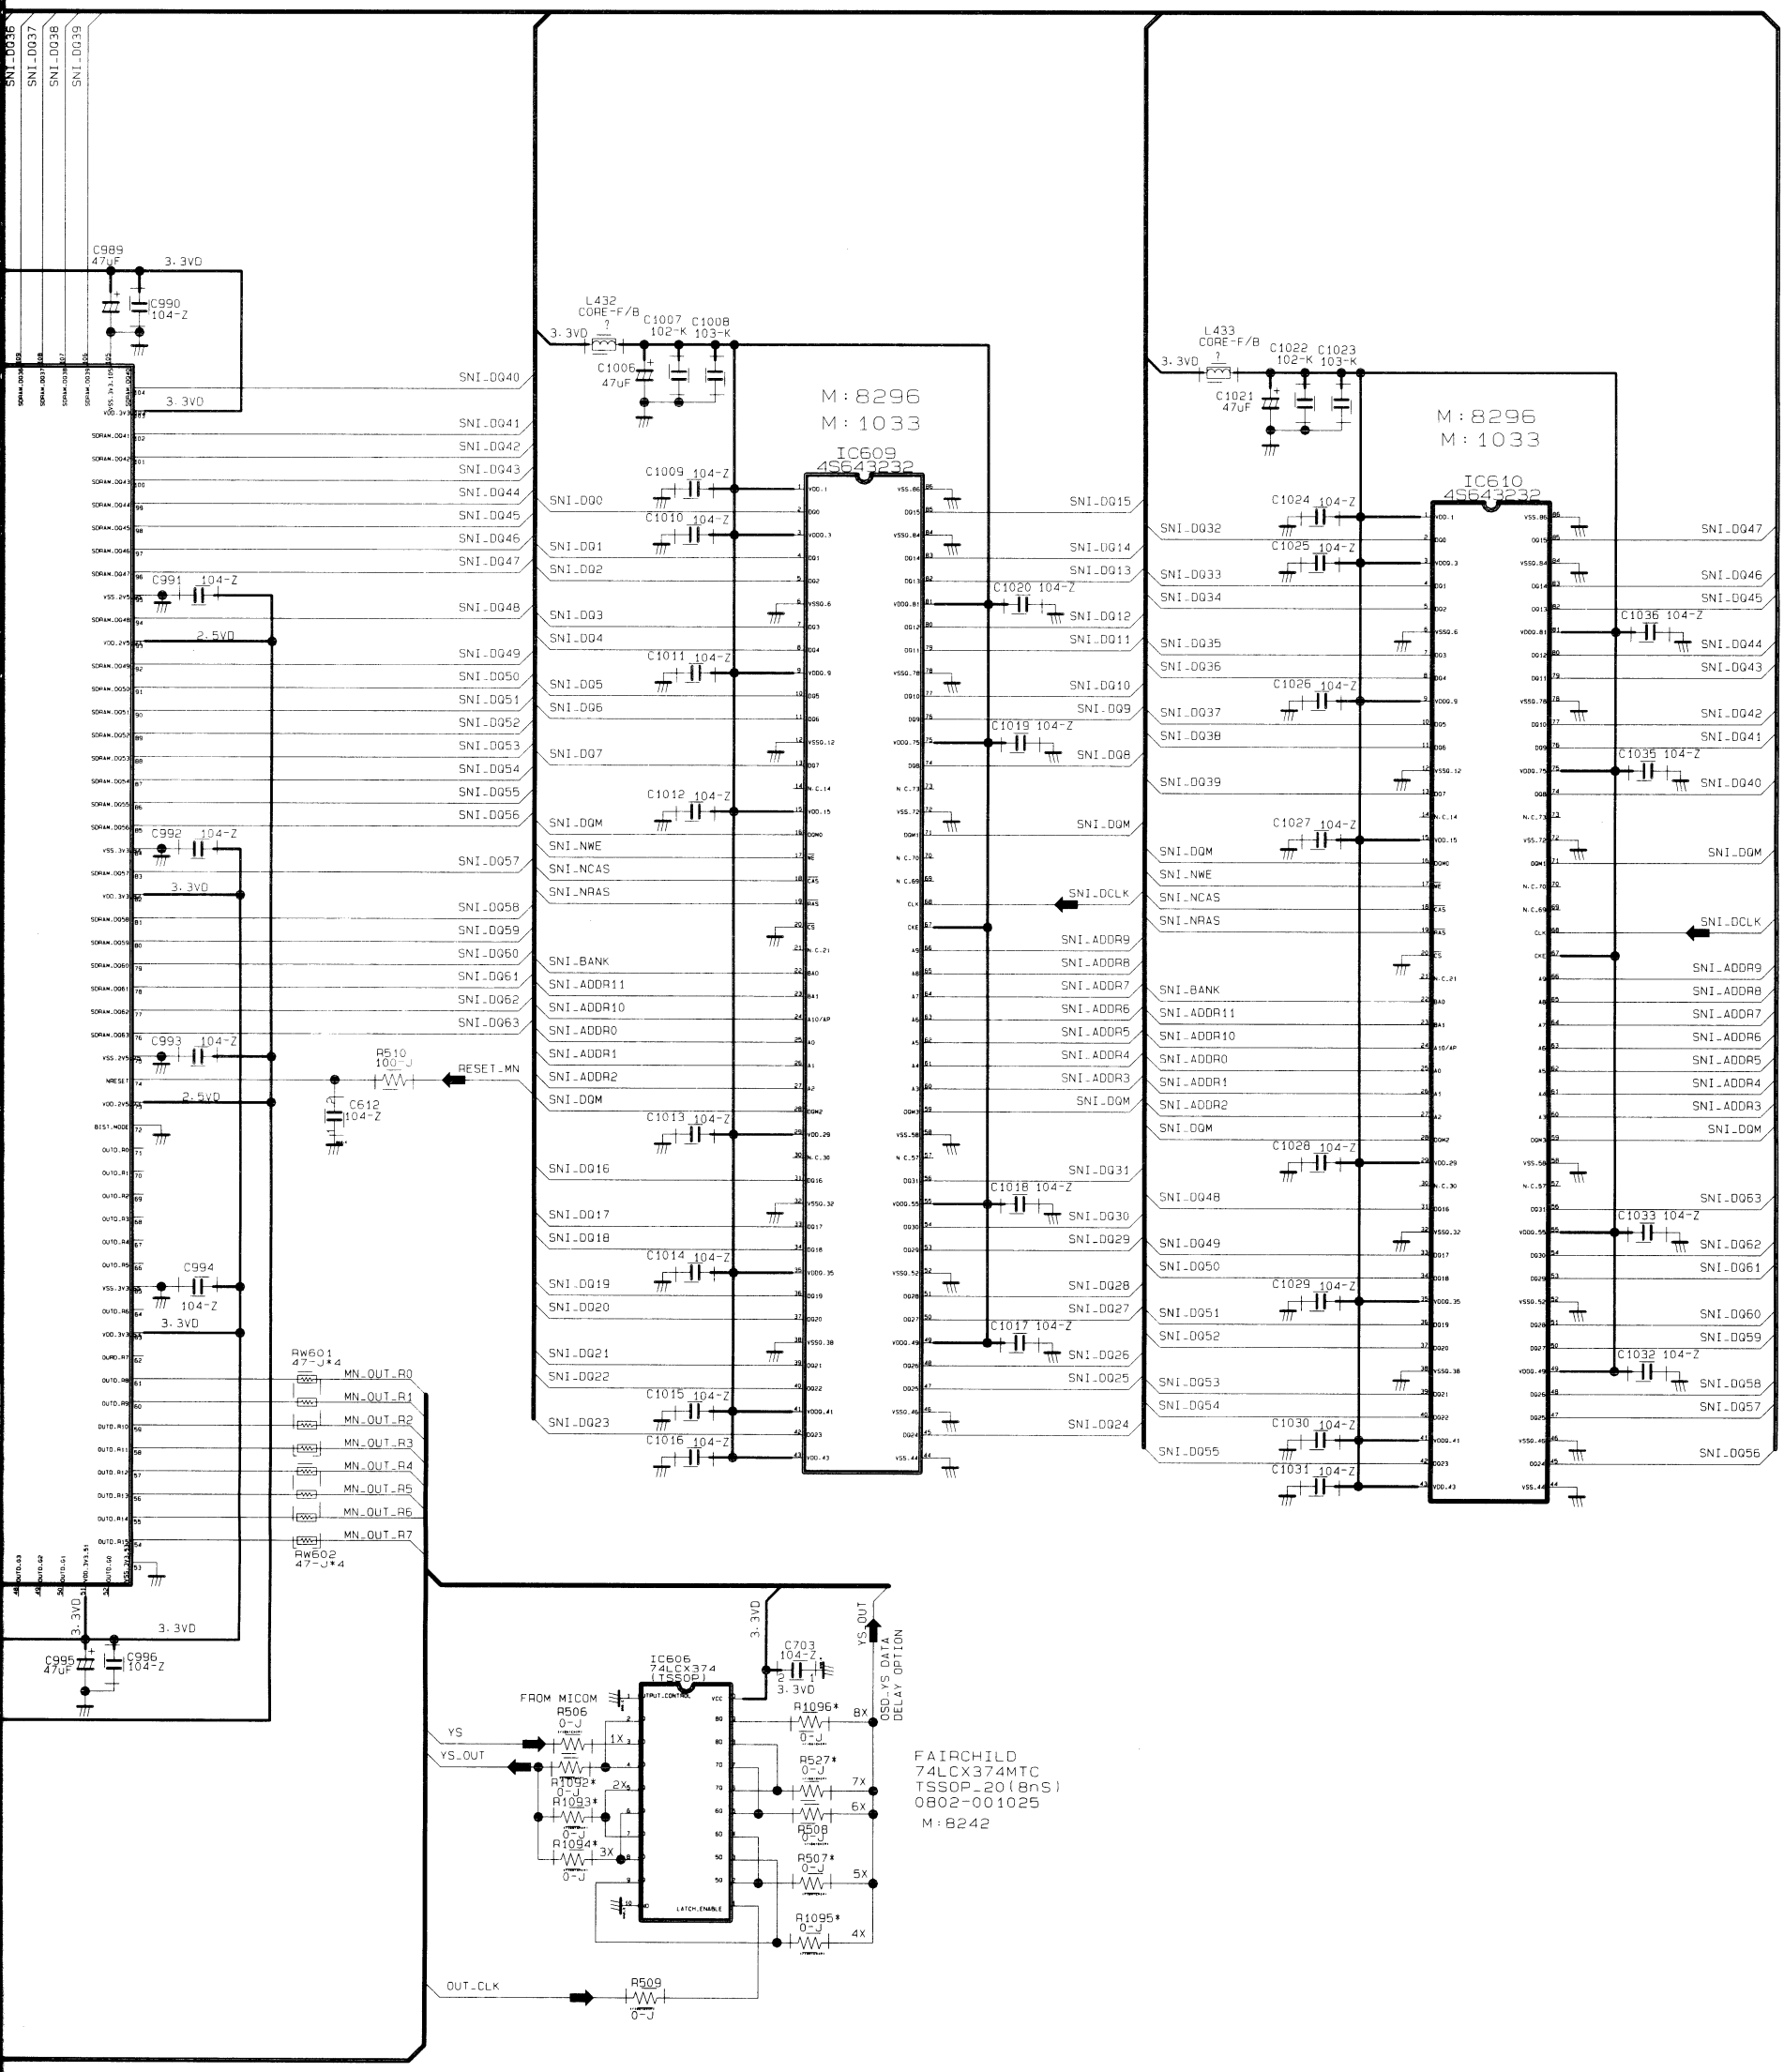

TITLE	L63A, SP50L2HX, DIGITAL MODULE, AA41-00675B					
DATE	2003.02.04					
SAMSUNG	Doc. CODE	DS020130-0003	Rev. No		SHEET NO	5/

7 8 9 10 11 12

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

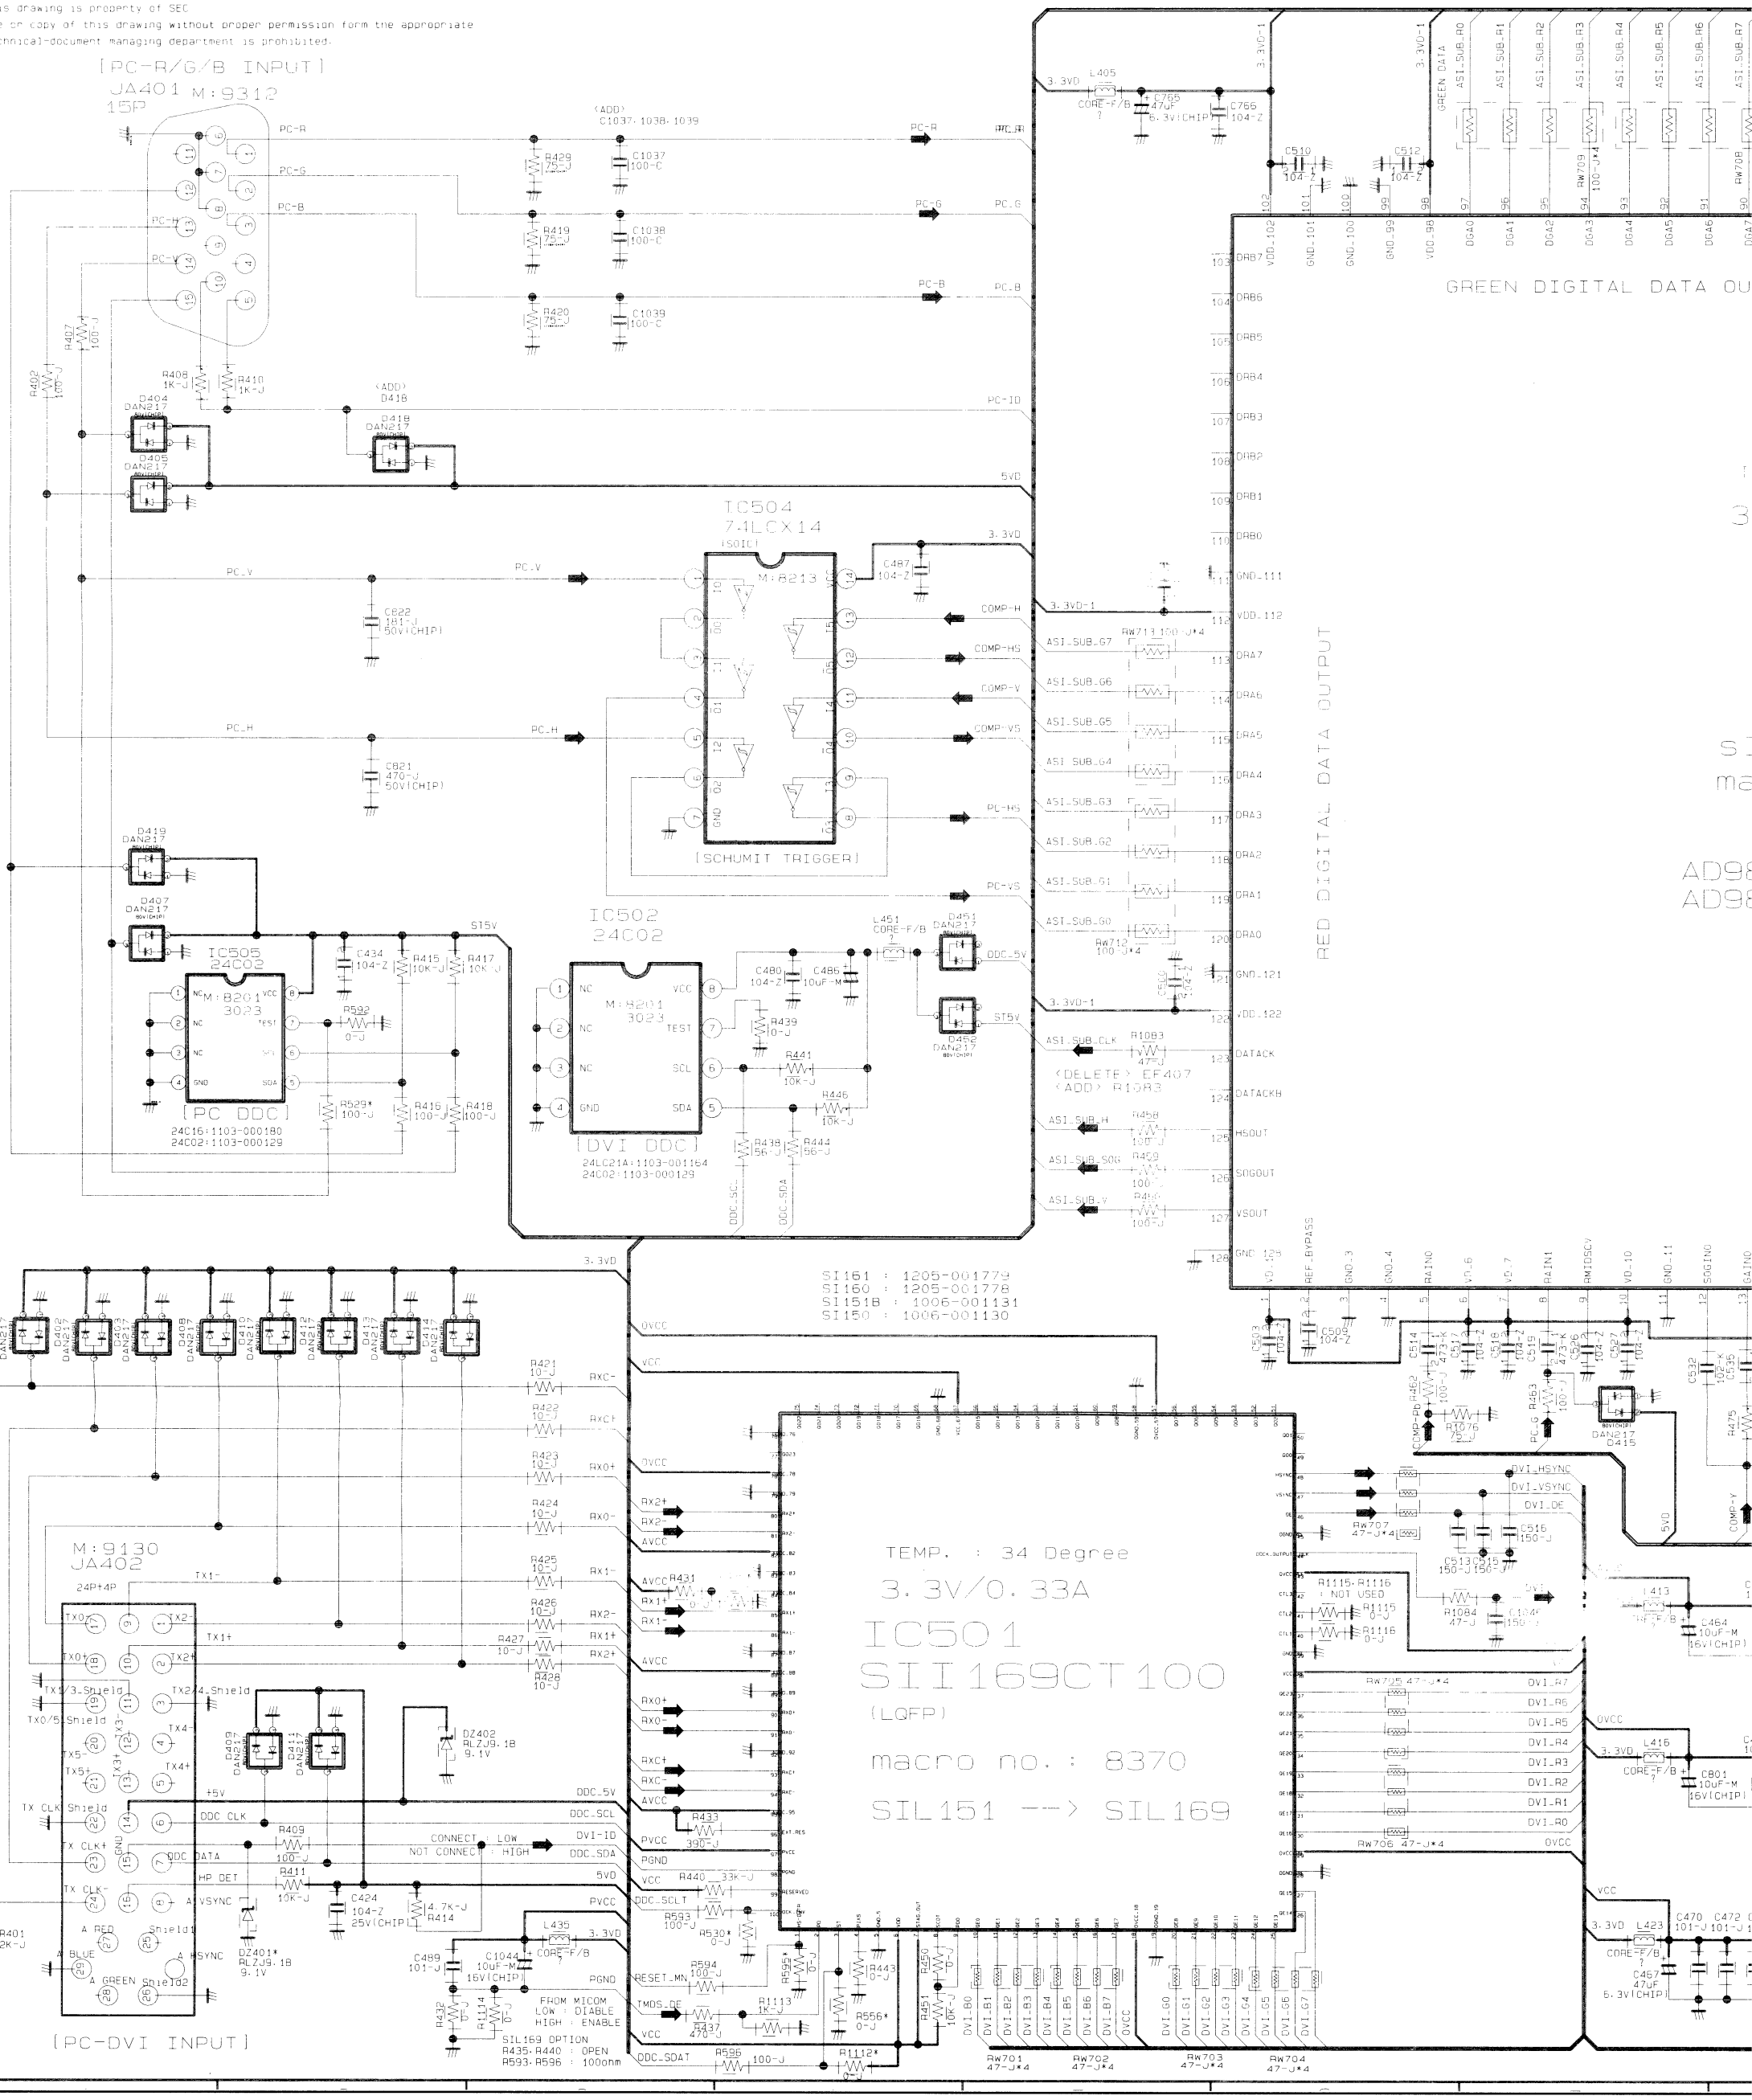

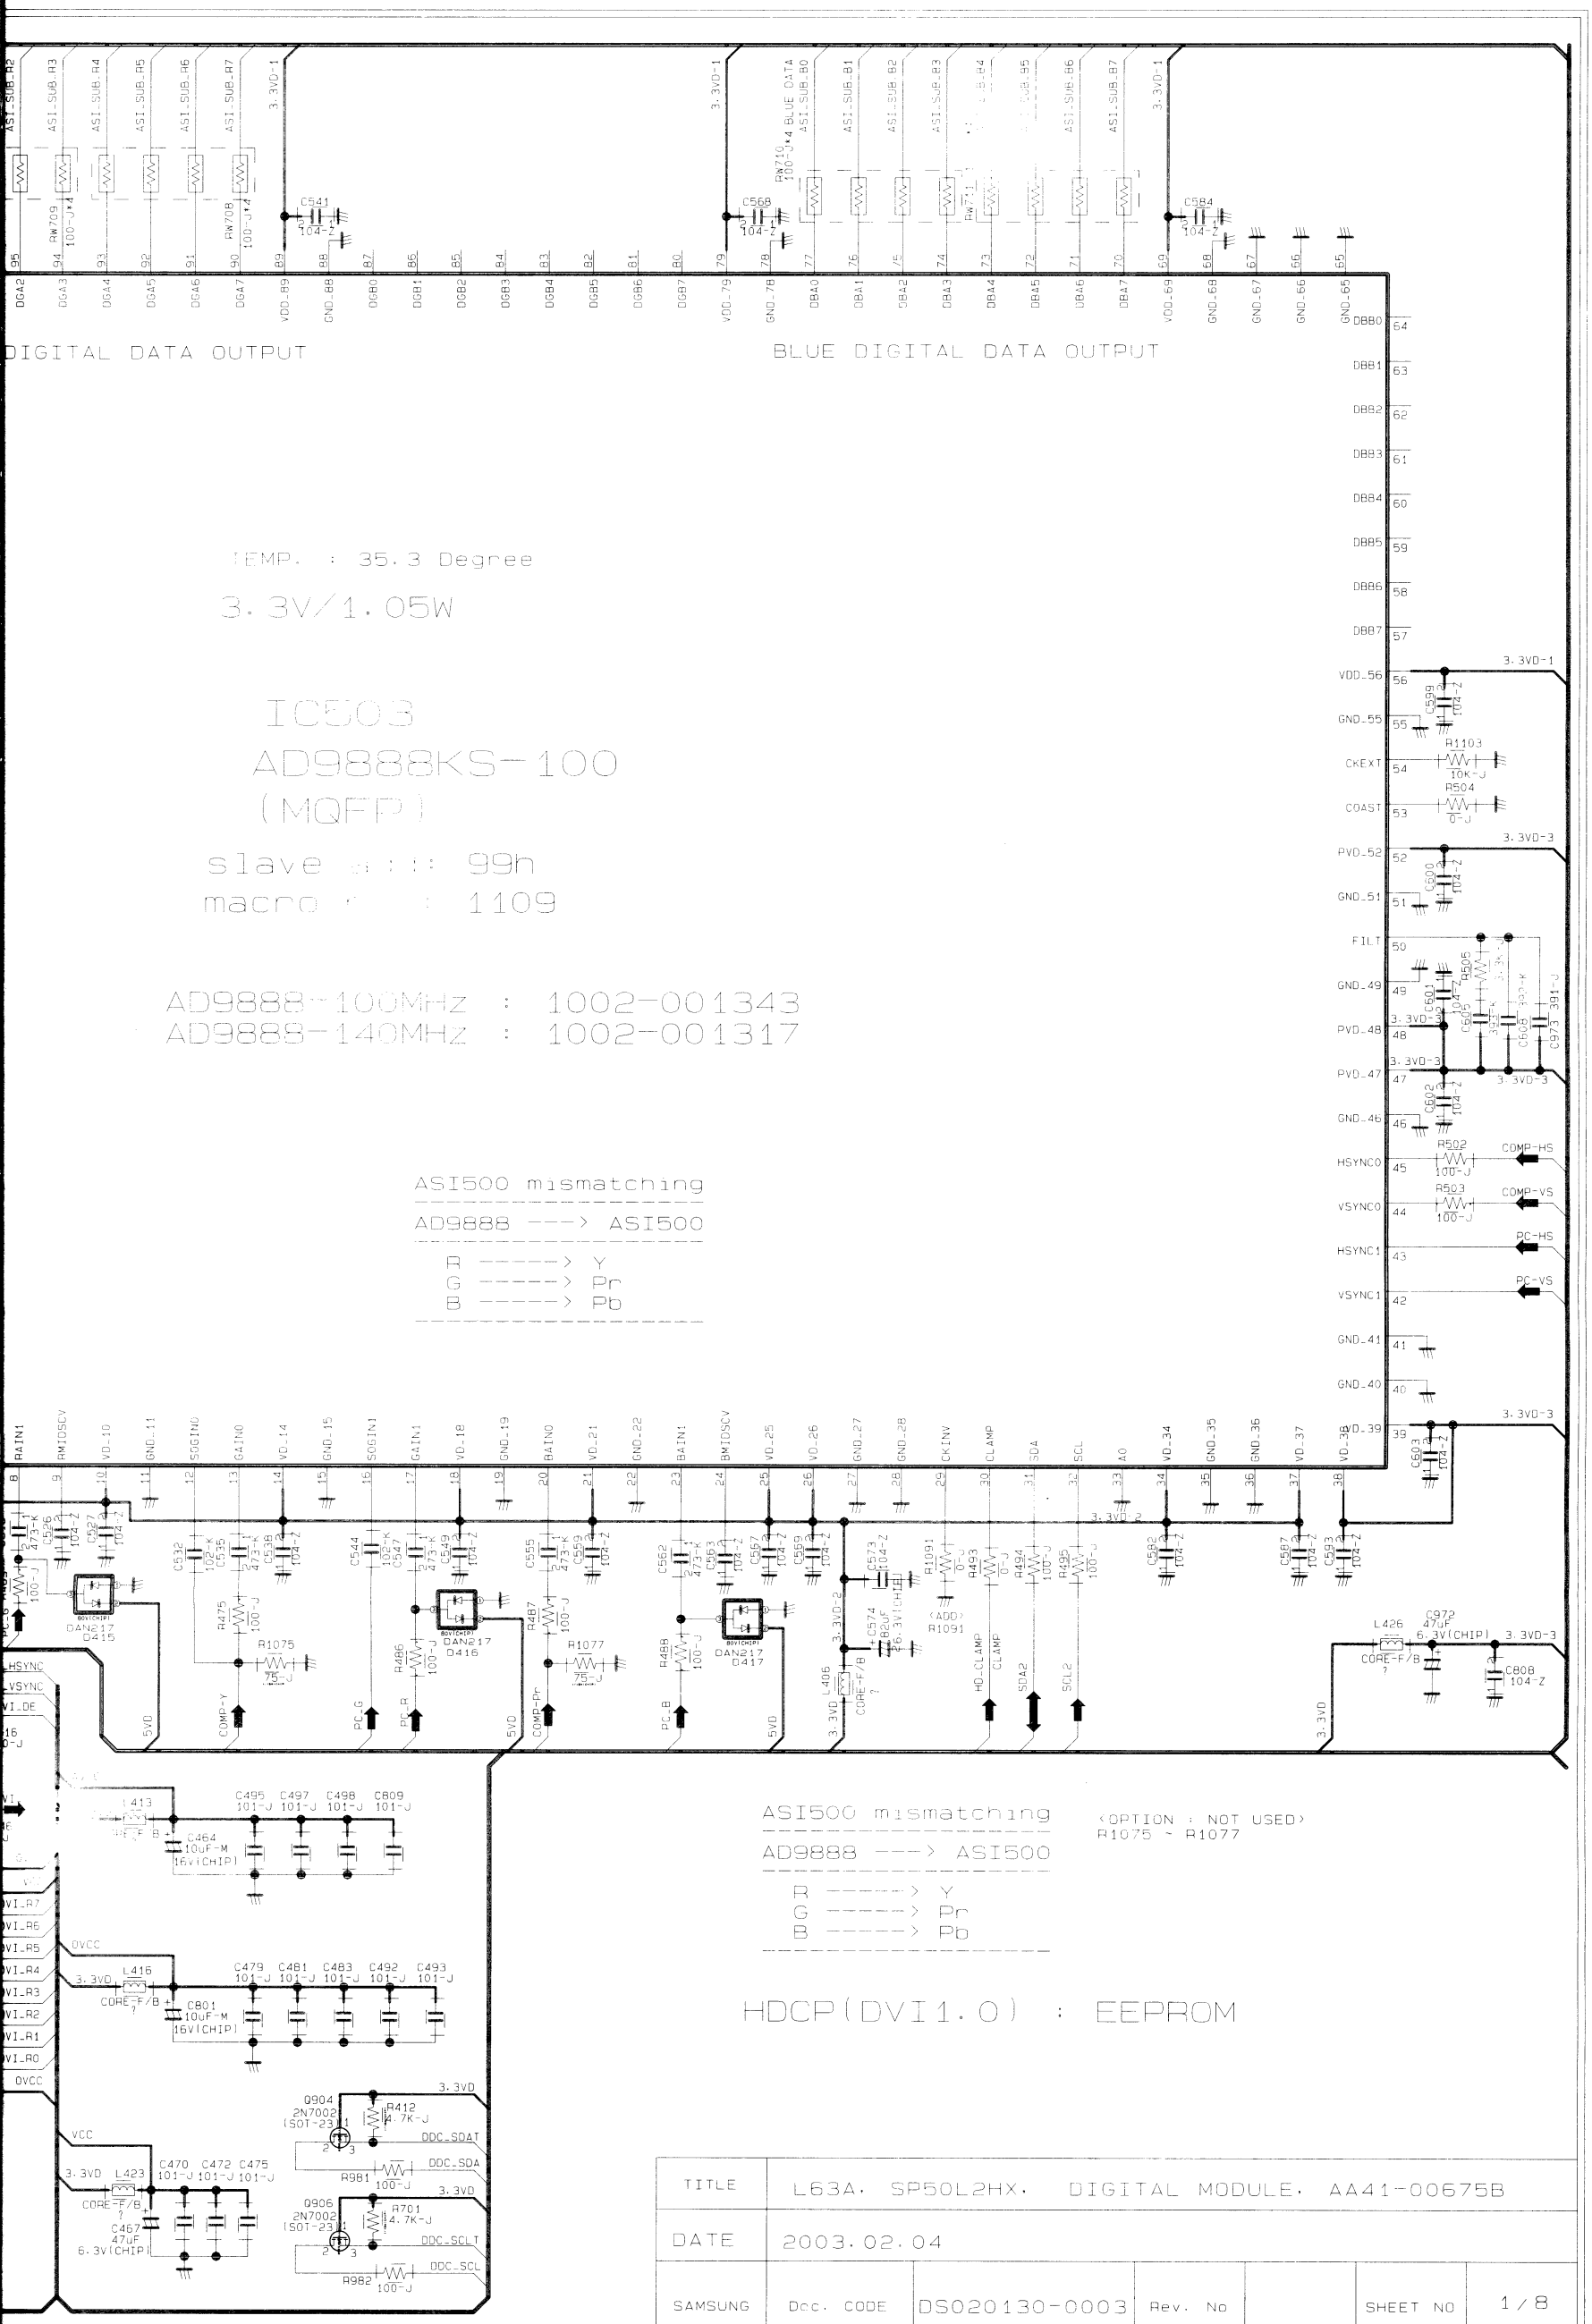
DIGITAL DATA OUTPUT
BLUE DIGITAL DATA OUTPUT
TEMP. : 35.3 Degree
3.3V/1.05W
IC503
AD9888KS-100
(MQFP)
slave : 99h
macro : 1109
AD9888-100MHz : 1002-001343
AD9888-140MHz : 1002-001317
ASI500 mismatching
AD9888 ---> ASI500
R ------> Y
G ------> Pr
B ------> Pb
<OPTION : NOT USED>
R1075 ~ R1077
ASI500 mismatching
AD9888 ---> ASI500
R ------> Y
G ------> Pr
B ------> Pb
HDCP(DVI1.0) : EEPROM
TITLE
L63A. SP50L2HX. DIGITAL MODULE. AA41-00675B
DATE
2003.02.04
SAMSUNG
Doc. CODE
DS020130-0003
Rev. No
SHEET NO
1/8

5-20 DIGITAL-7

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical document managing department is prohibited.

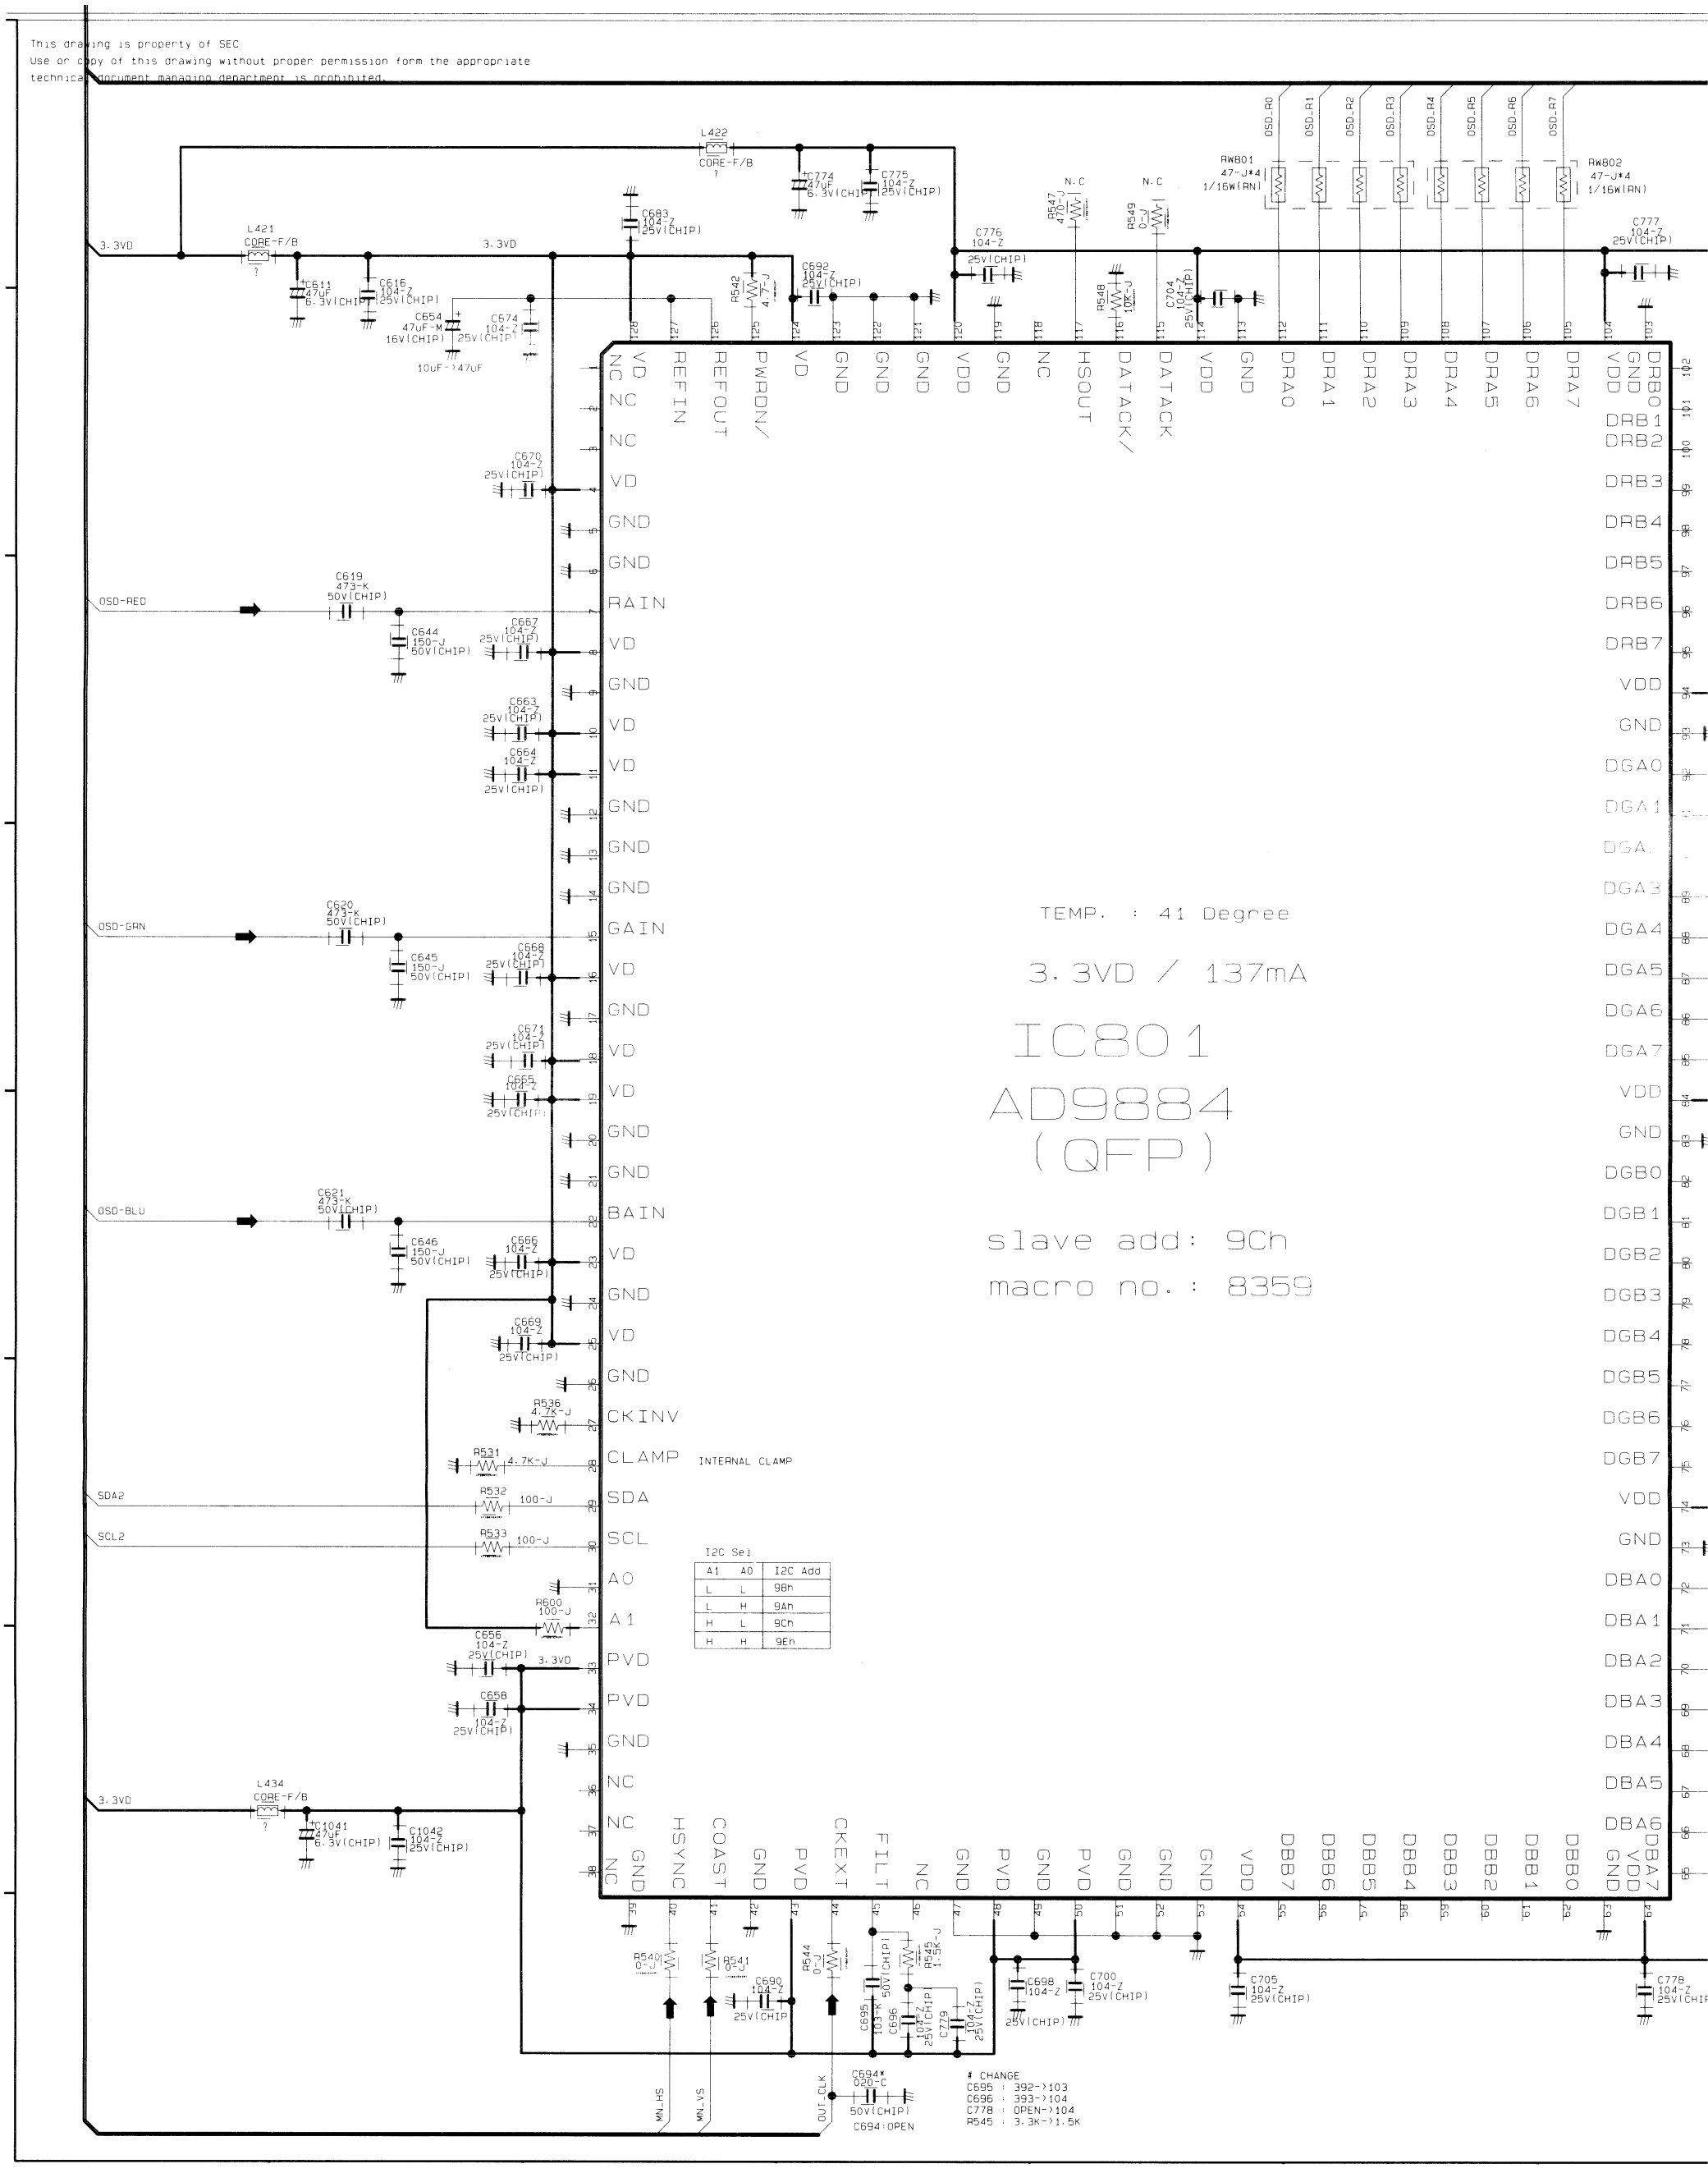

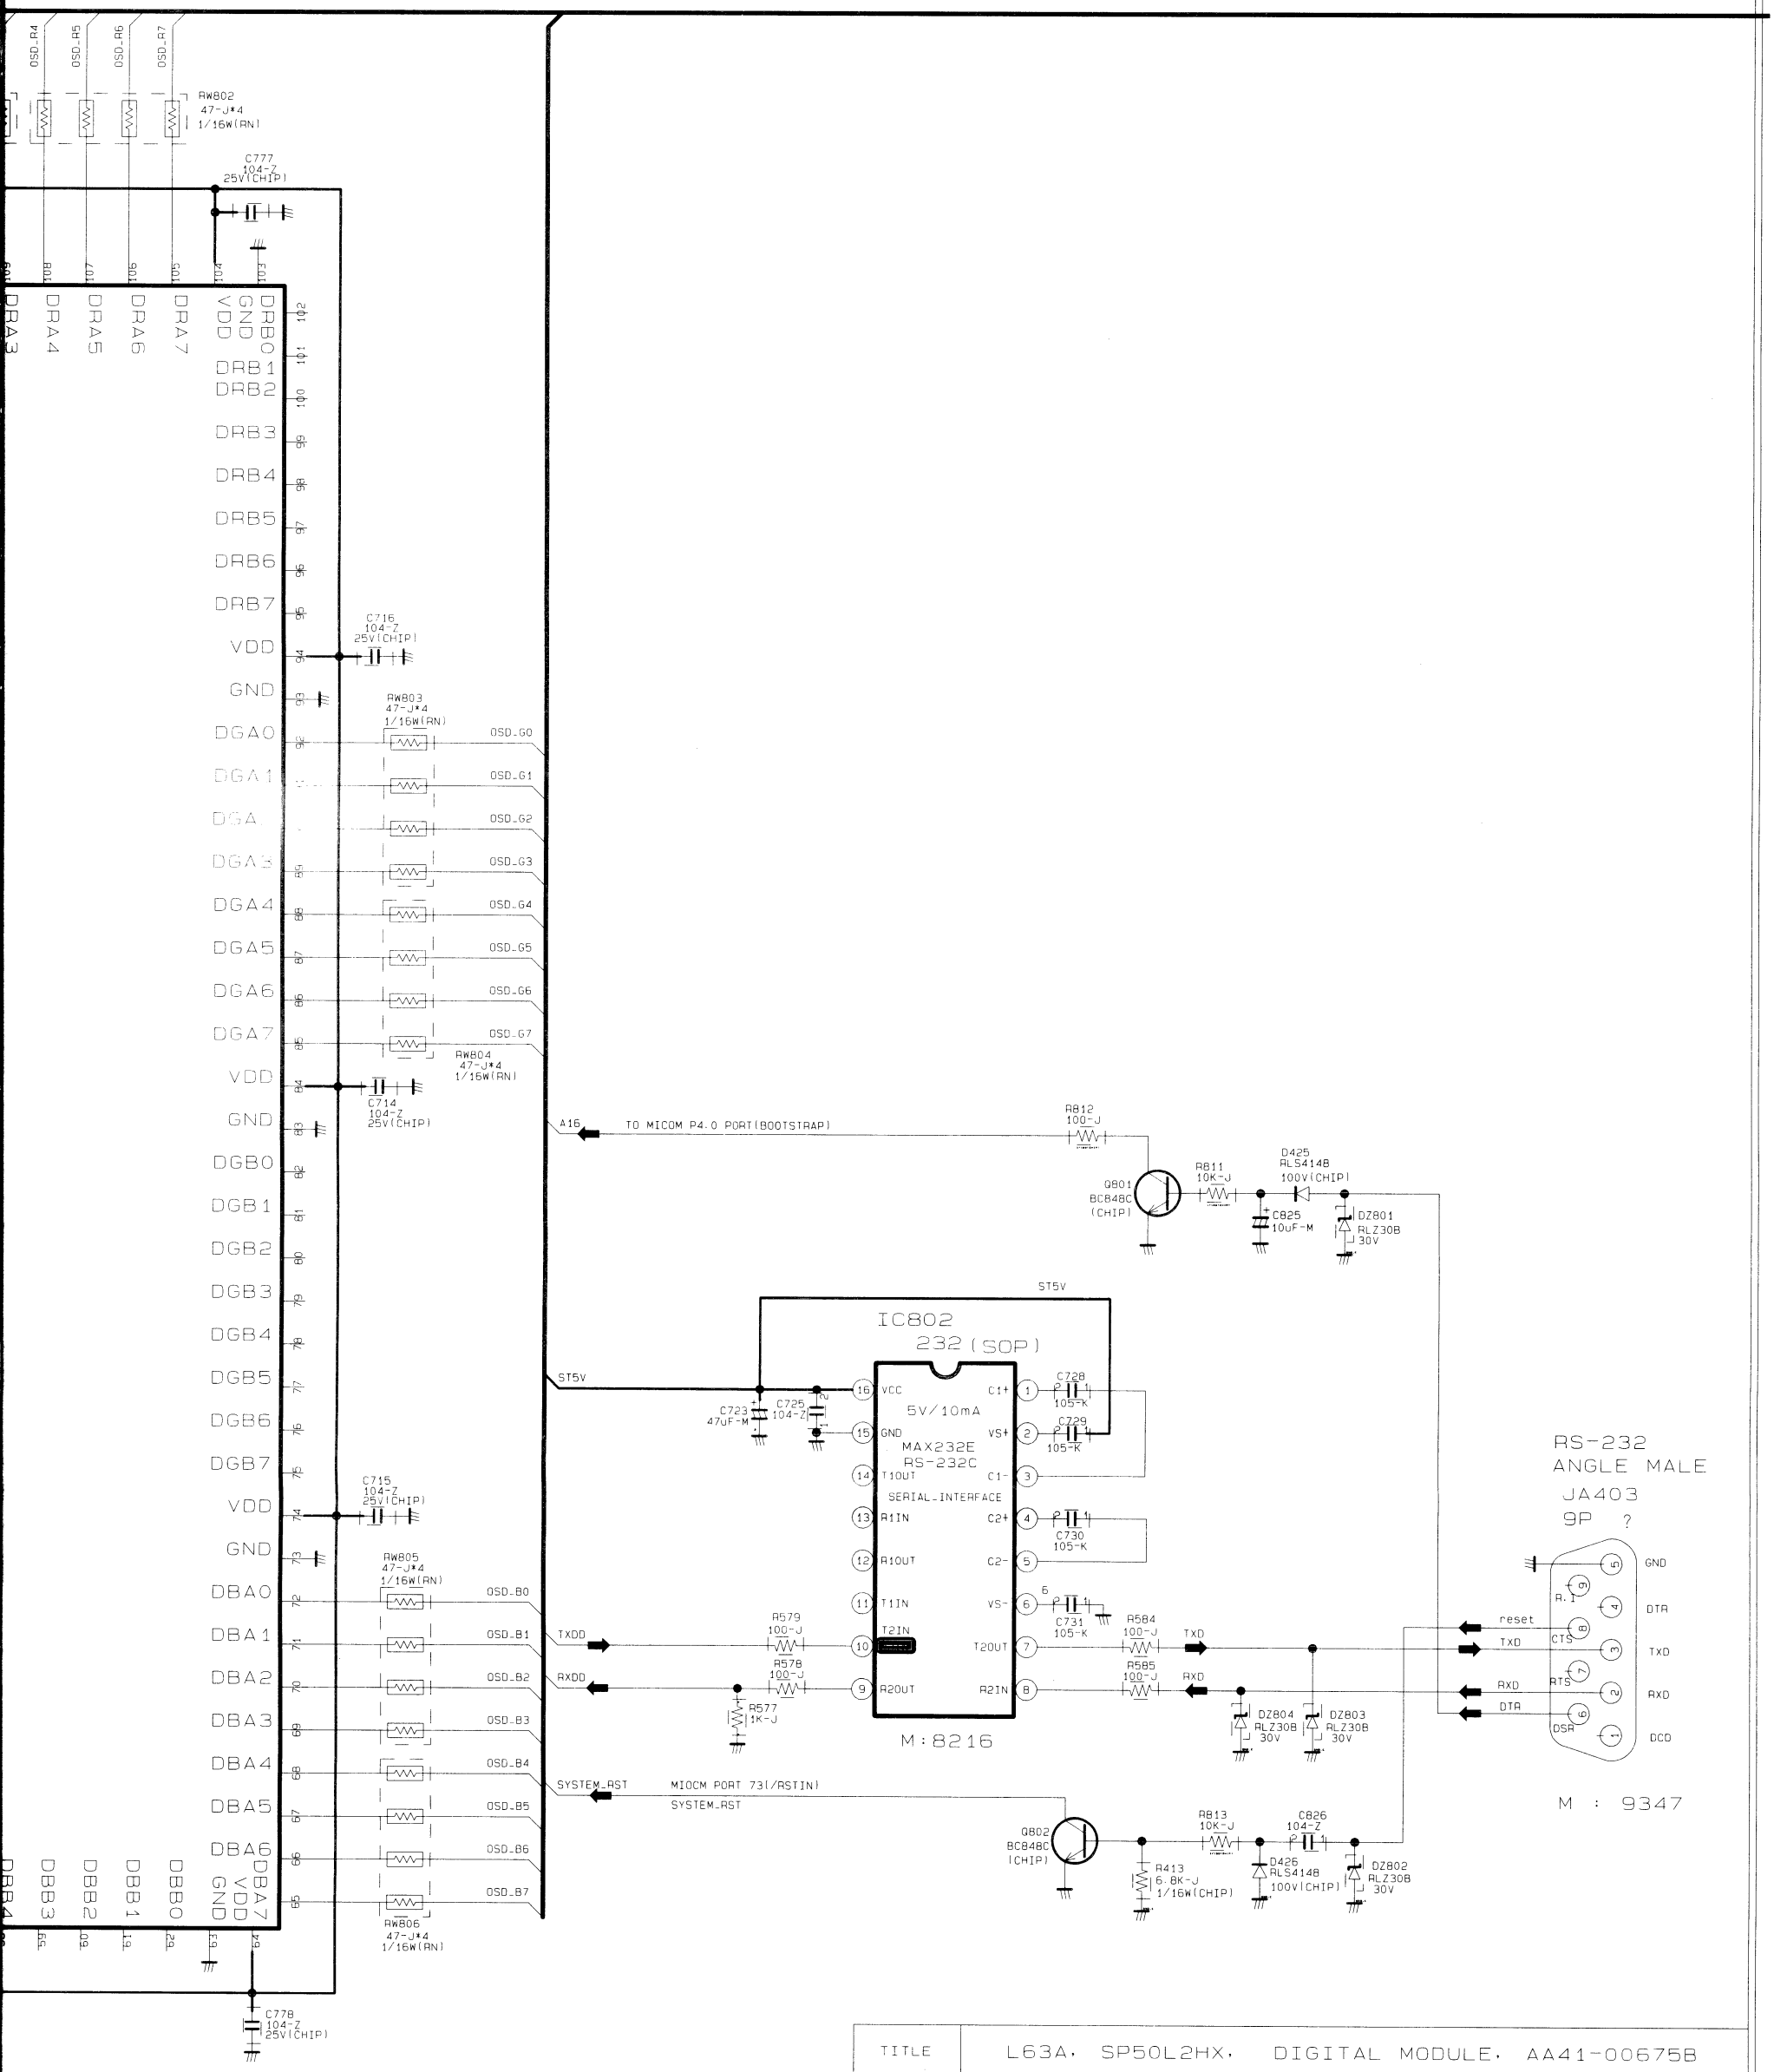

TITLE	L63A, SP50L2HX, DIGITAL MODULE, AA41-00675B						
DATE	2003.02.04						
SAMSUNG	Doc. CODE	DS020130-0003	Rev. No		SHEET NO	6/8	

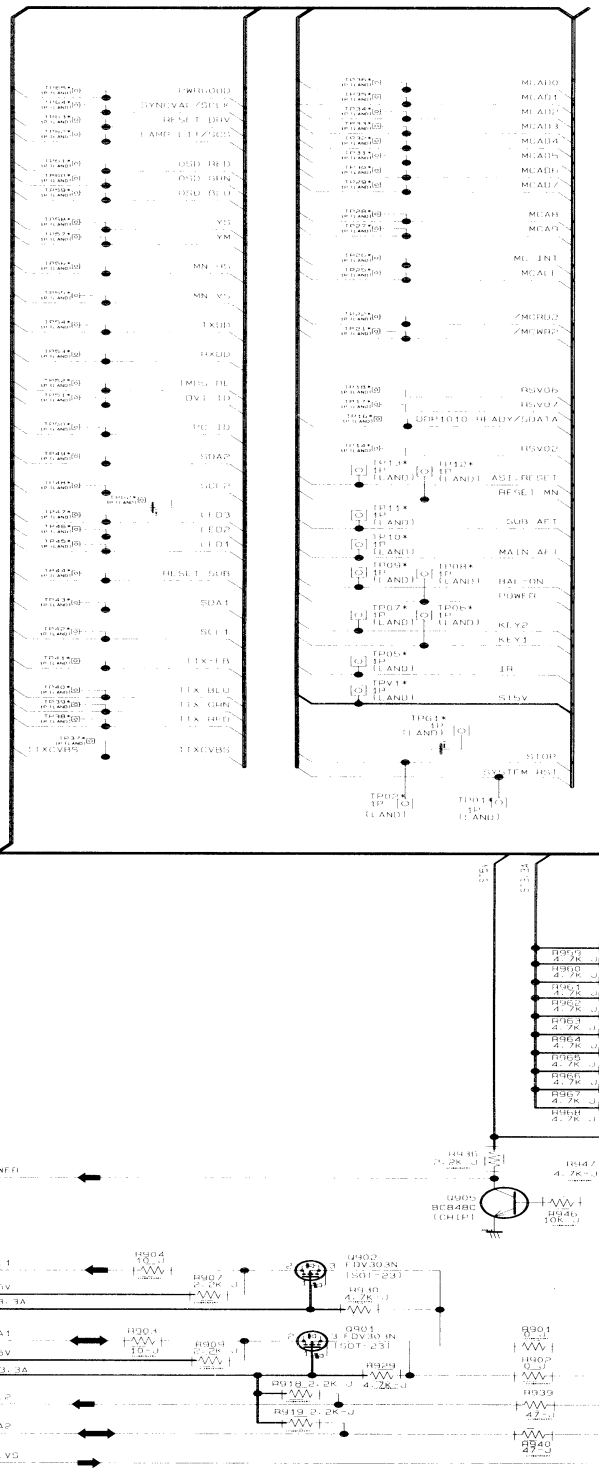

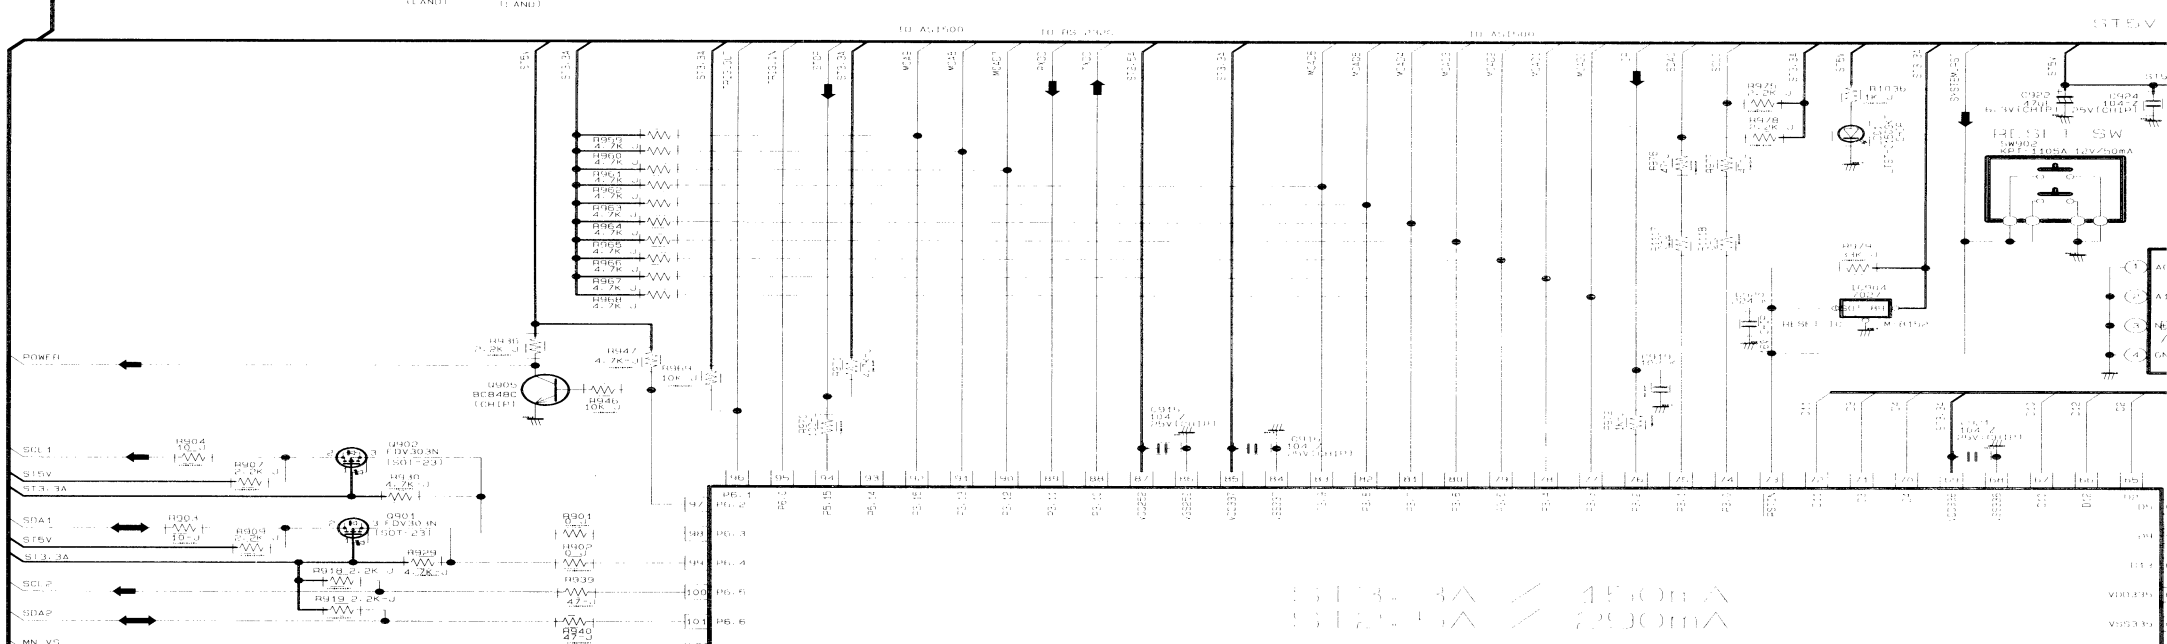
POWER
SCL1
S15V
ST3.3A
SDA1
SCL2
SDA2
MN_VS
MN_HS
YM
YS
TTX-FB
S13.3A
S12.5A
OSD-RED
TTX-RED
OSD-GRN
TTX-GRN
OSD-BLU
TTX-BLU
TTXCVBS
KEY1
KEY2
MAIN-AFT
SUB AFT
Q901 KTD1303N (SOT-23)
Q902 BC848C (CHIP)
Q903 BC848C (CHIP)
R904 10-J
R907 2.2K-J
R910 10K-J
R908 10K-J
R909 2.2K-J
R911 1K-J
R912* 0-J
R916 56K-J
R917 56K-J
R918 2.2K-J
R919 2.2K-J
R920 1K-J
R921 22K-J
R922 4.7K-J
R923 1K-J
R926 1K-J
R927 470-J
R928 56K-J
R929 4.7K-J
R931 100-J
R932 100-J
R933 100-J
R934 100-J
R935 100-J
R937 100-J
R938 100-J
R939 47-J
R940 47-J
R941 10K-J
R942 56K-J
R943 100-J
R944 100-J
R945 100-J
R946 10K-J
R947 4.7K-J
R948 10K-J
R949 4.7K-J
R950 0-J
R951 4.7K-J
R952 4.7K-J
R953 4.7K-J
R954 4.7K-J
R955 4.7K-J
R956 4.7K-J
R957 4.7K-J
R958 4.7K-J
R959 4.7K-J
R960 4.7K-J
R961 4.7K-J
R962 4.7K-J
R963 4.7K-J
R964 4.7K-J
R965 4.7K-J
R966 4.7K-J
R967 4.7K-J
R968 4.7K-J
C901 104-Z 25V(CHIP)
C902 104-Z 25V(CHIP)
C903 101-J 50V(CHIP)
C904 221-J 50V(CHIP)
C905 200-J 50V(CHIP)
C906 200-J 50V(CHIP)
C907 104-Z 25V(CHIP)
C908 104-Z 25V(CHIP)
C909 104-Z 25V(CHIP)
C910 104-Z 25V(CHIP)
C911 104-Z 25V(CHIP)
C912 104-Z 25V(CHIP)
C913 104-Z 25V(CHIP)
C914 104-Z 25V(CHIP)
C945 680-J
C946 680-J
C947 680-J
C949 680-J
C950 680-J
C951 680-J
DZ901 RLZ5.2B 5.2V
DZ902 RLZ5.2B 5.2V
X901 8MHz/20pF HC-49/3SMSH
CN905* 8P 7 M-9188
CN906* 8P 7 M-9188
TP001* 1P (LAND)
TP002* 1P (LAND)
TP003* 1P (LAND)
TP004* 1P (LAND)
TP005* 1P (LAND)
TP006* 1P (LAND)
TP007* 1P (LAND)
TP008* 1P (LAND)
TP009* 1P (LAND)
TP010* 1P (LAND)
TP011* 1P (LAND)
TP012* 1P (LAND)
TP013* 1P (LAND)
TPG1* 1P (LAND)
TPV1* 1P (LAND)
TP026 1P (LAND)
TP027 1P (LAND)
TP028 1P (LAND)
TP029 1P (LAND)
TP030 1P (LAND)
TP031 1P (LAND)
TP032 1P (LAND)
TP033 1P (LAND)
TP034 1P (LAND)
TP035 1P (LAND)
TP036 1P (LAND)
TP037 1P (LAND)
TP038 1P (LAND)

EXPANDER MICOM
SDRAM
EPROM
TP ARRAYS EPROM SOCKET
DATE : 2002.11.05
8 / 8

5-22 INTERFACE

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

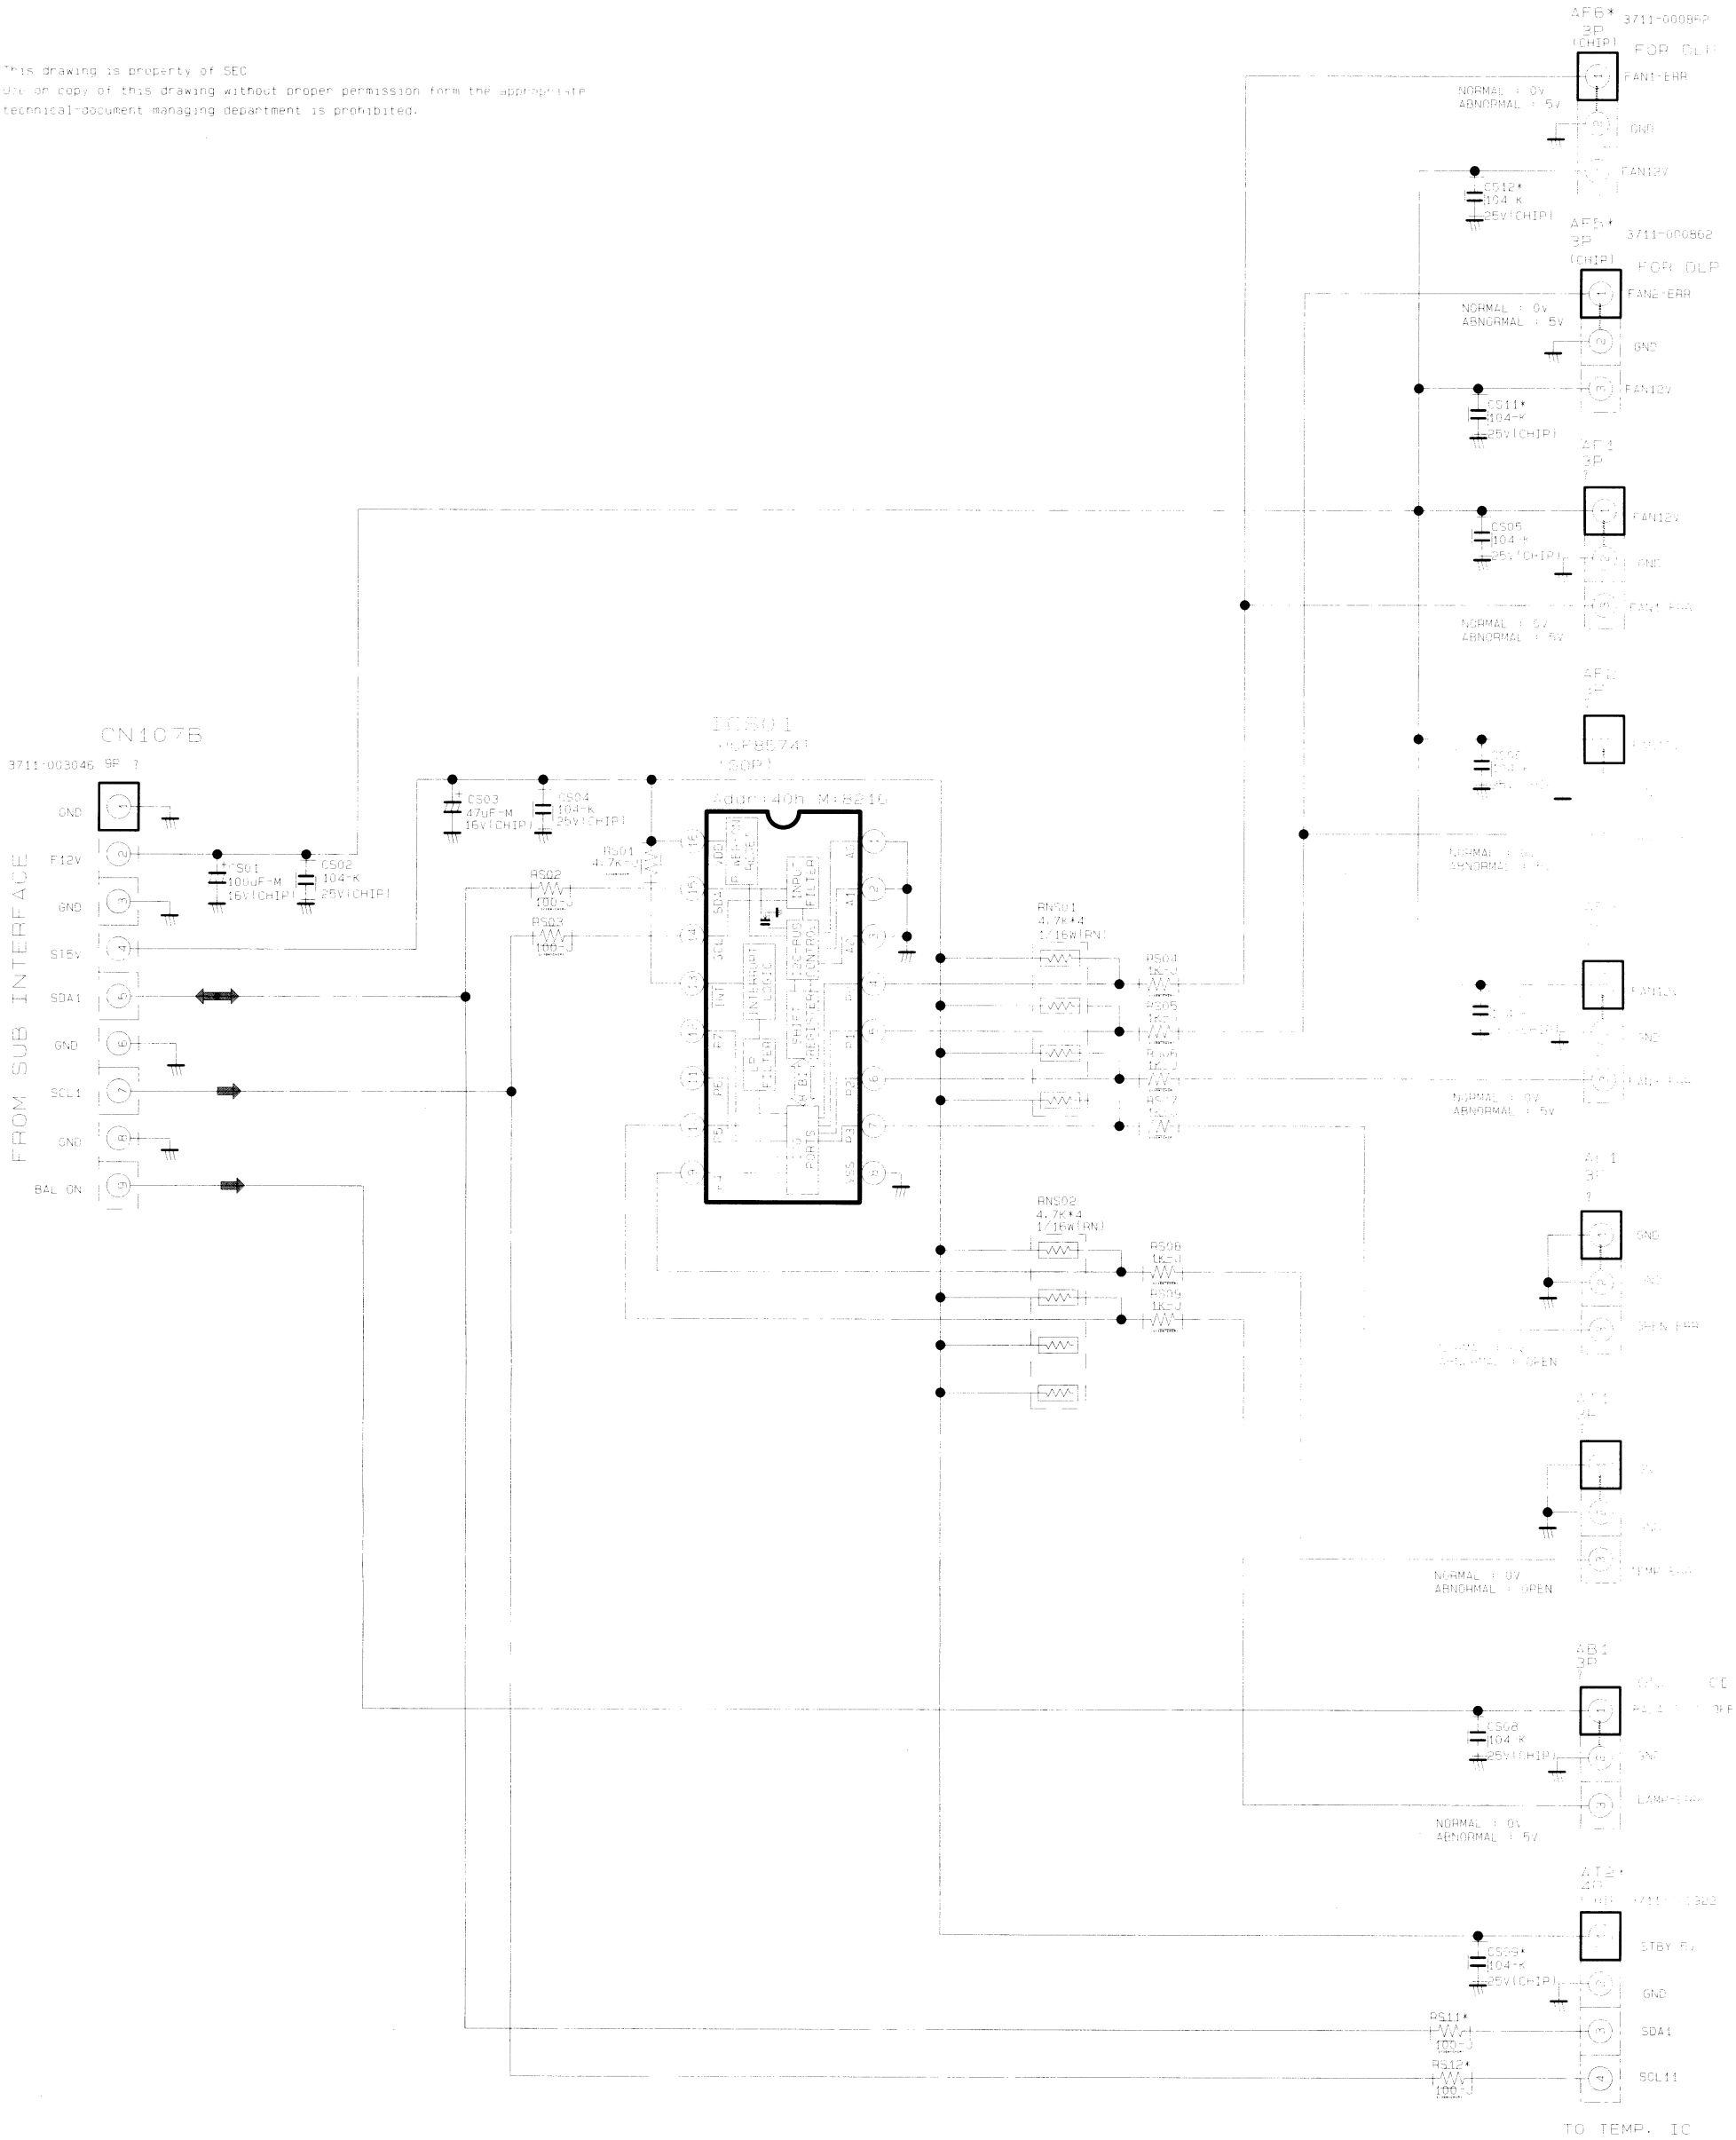

SCHEMATIC DIAGRAM

CHASSIS: M51A
MODEL: SP43J6HD
BOARD NAME: MASTER_POWER-SW
DATE: 2000.02.29

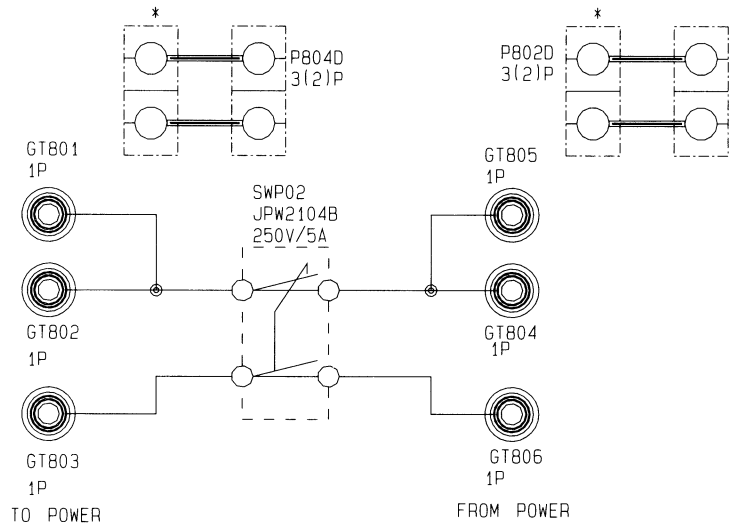

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate technical-document managing department is prohibited.

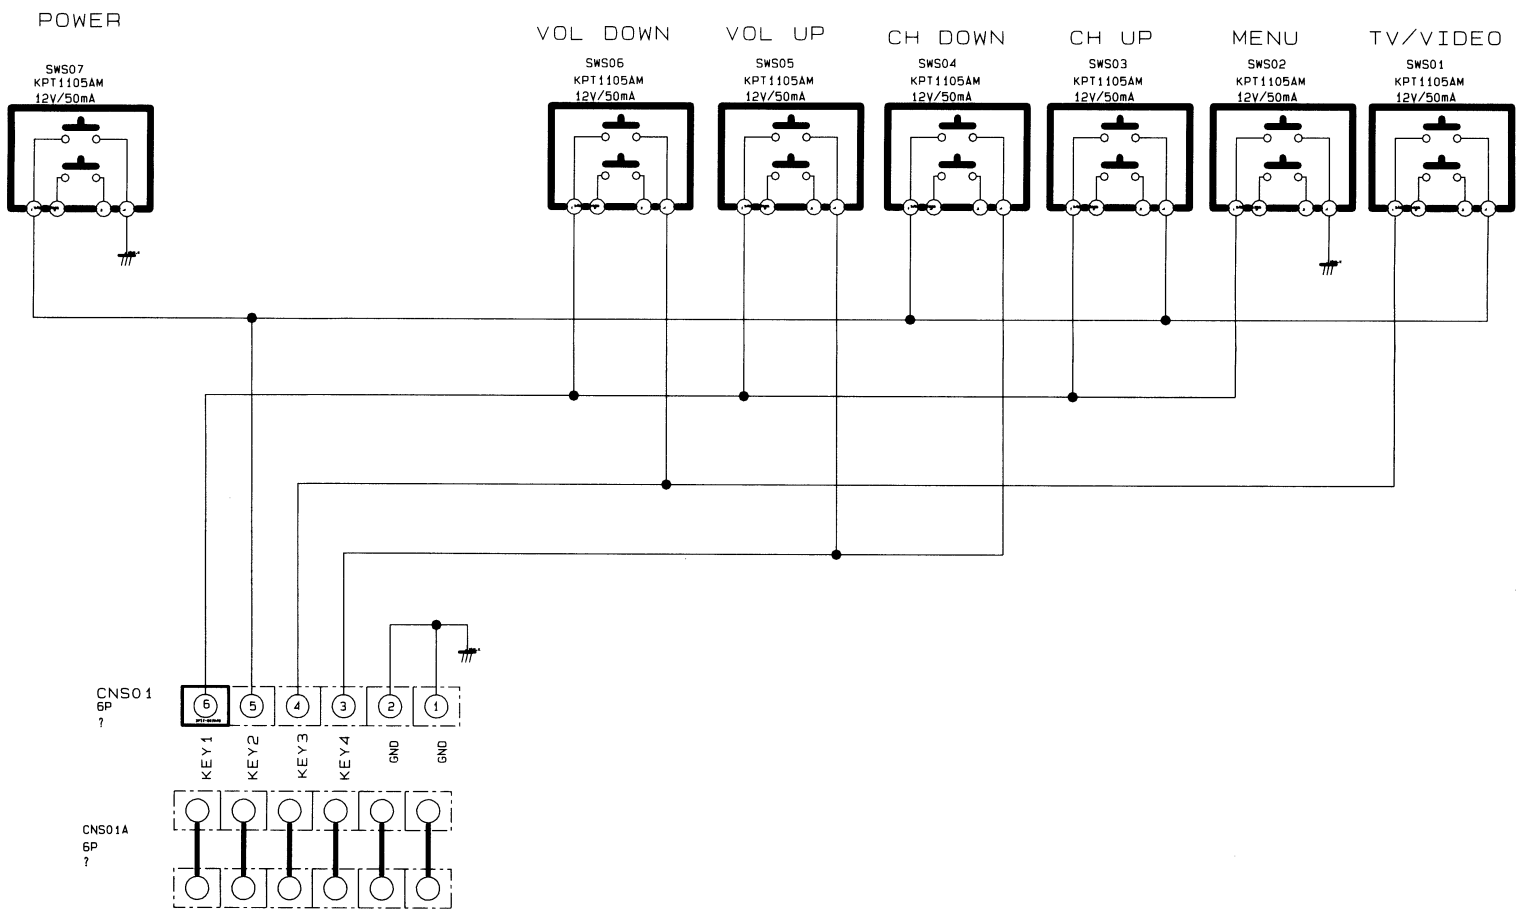

This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate
technical/document managing department is prohibited.

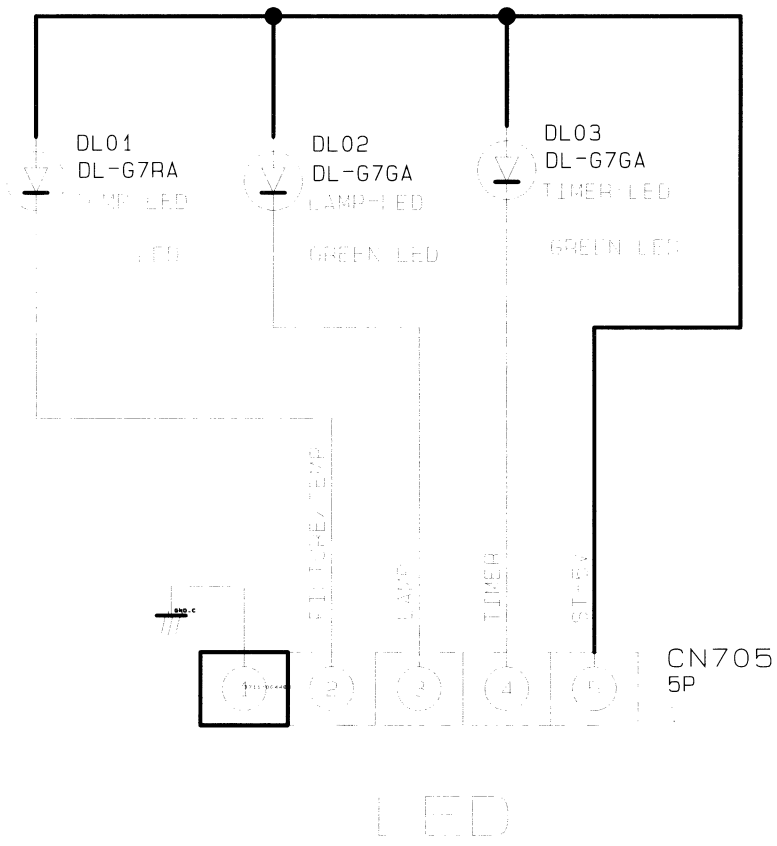

CHASS
MODEL
BOARD



5-26 LINE FILTER

CHASSIS : B3K

MODEL : B3K

BOARD : LINE-FILTER

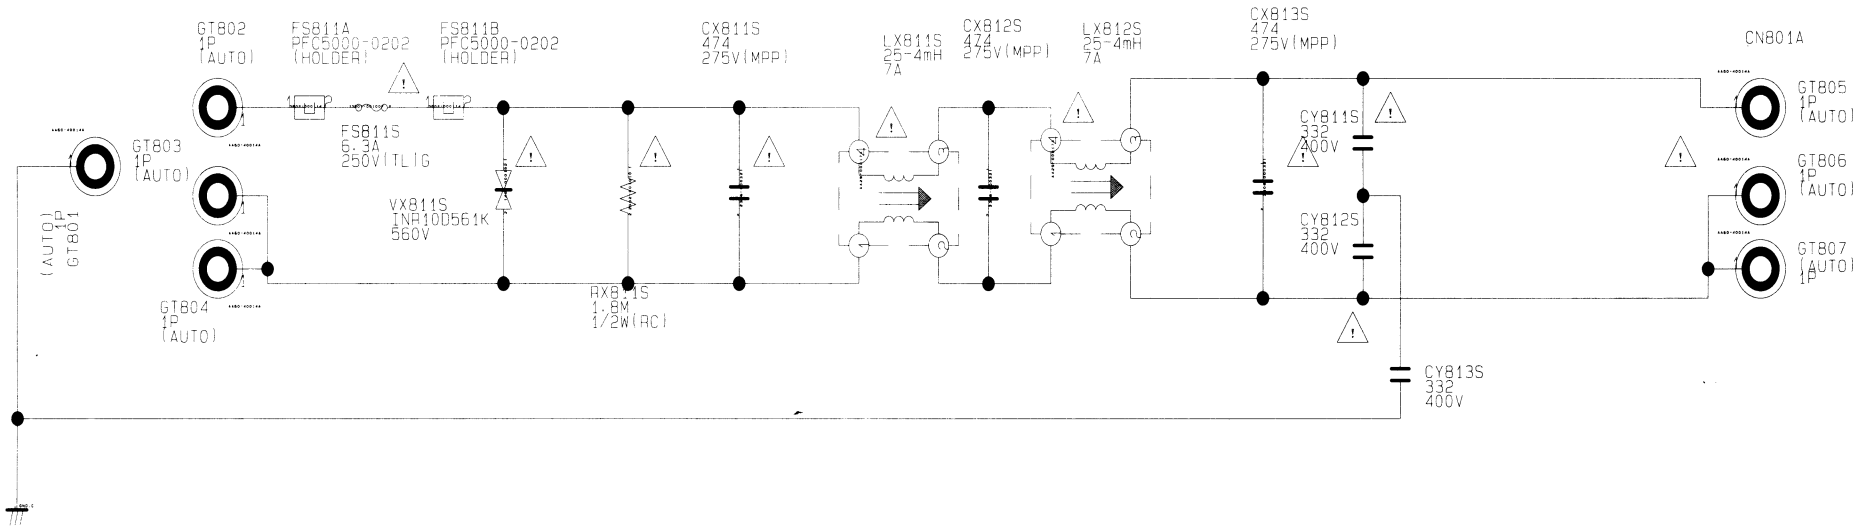

5-28 SIDE KEY CONTROL 61"

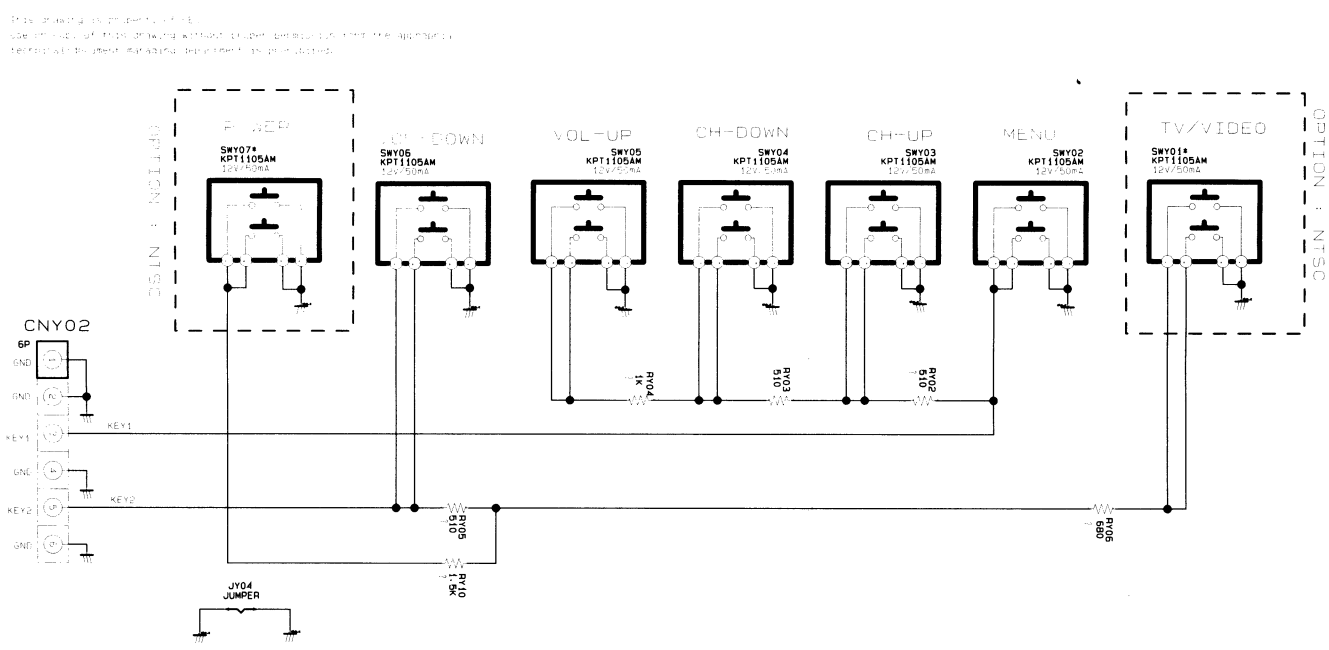

his drawing is property of SEC
se or copy of this drawing without proper permission form the appropriate
echnical-document managing department is prohibited.

AV-SIDE(AV4)

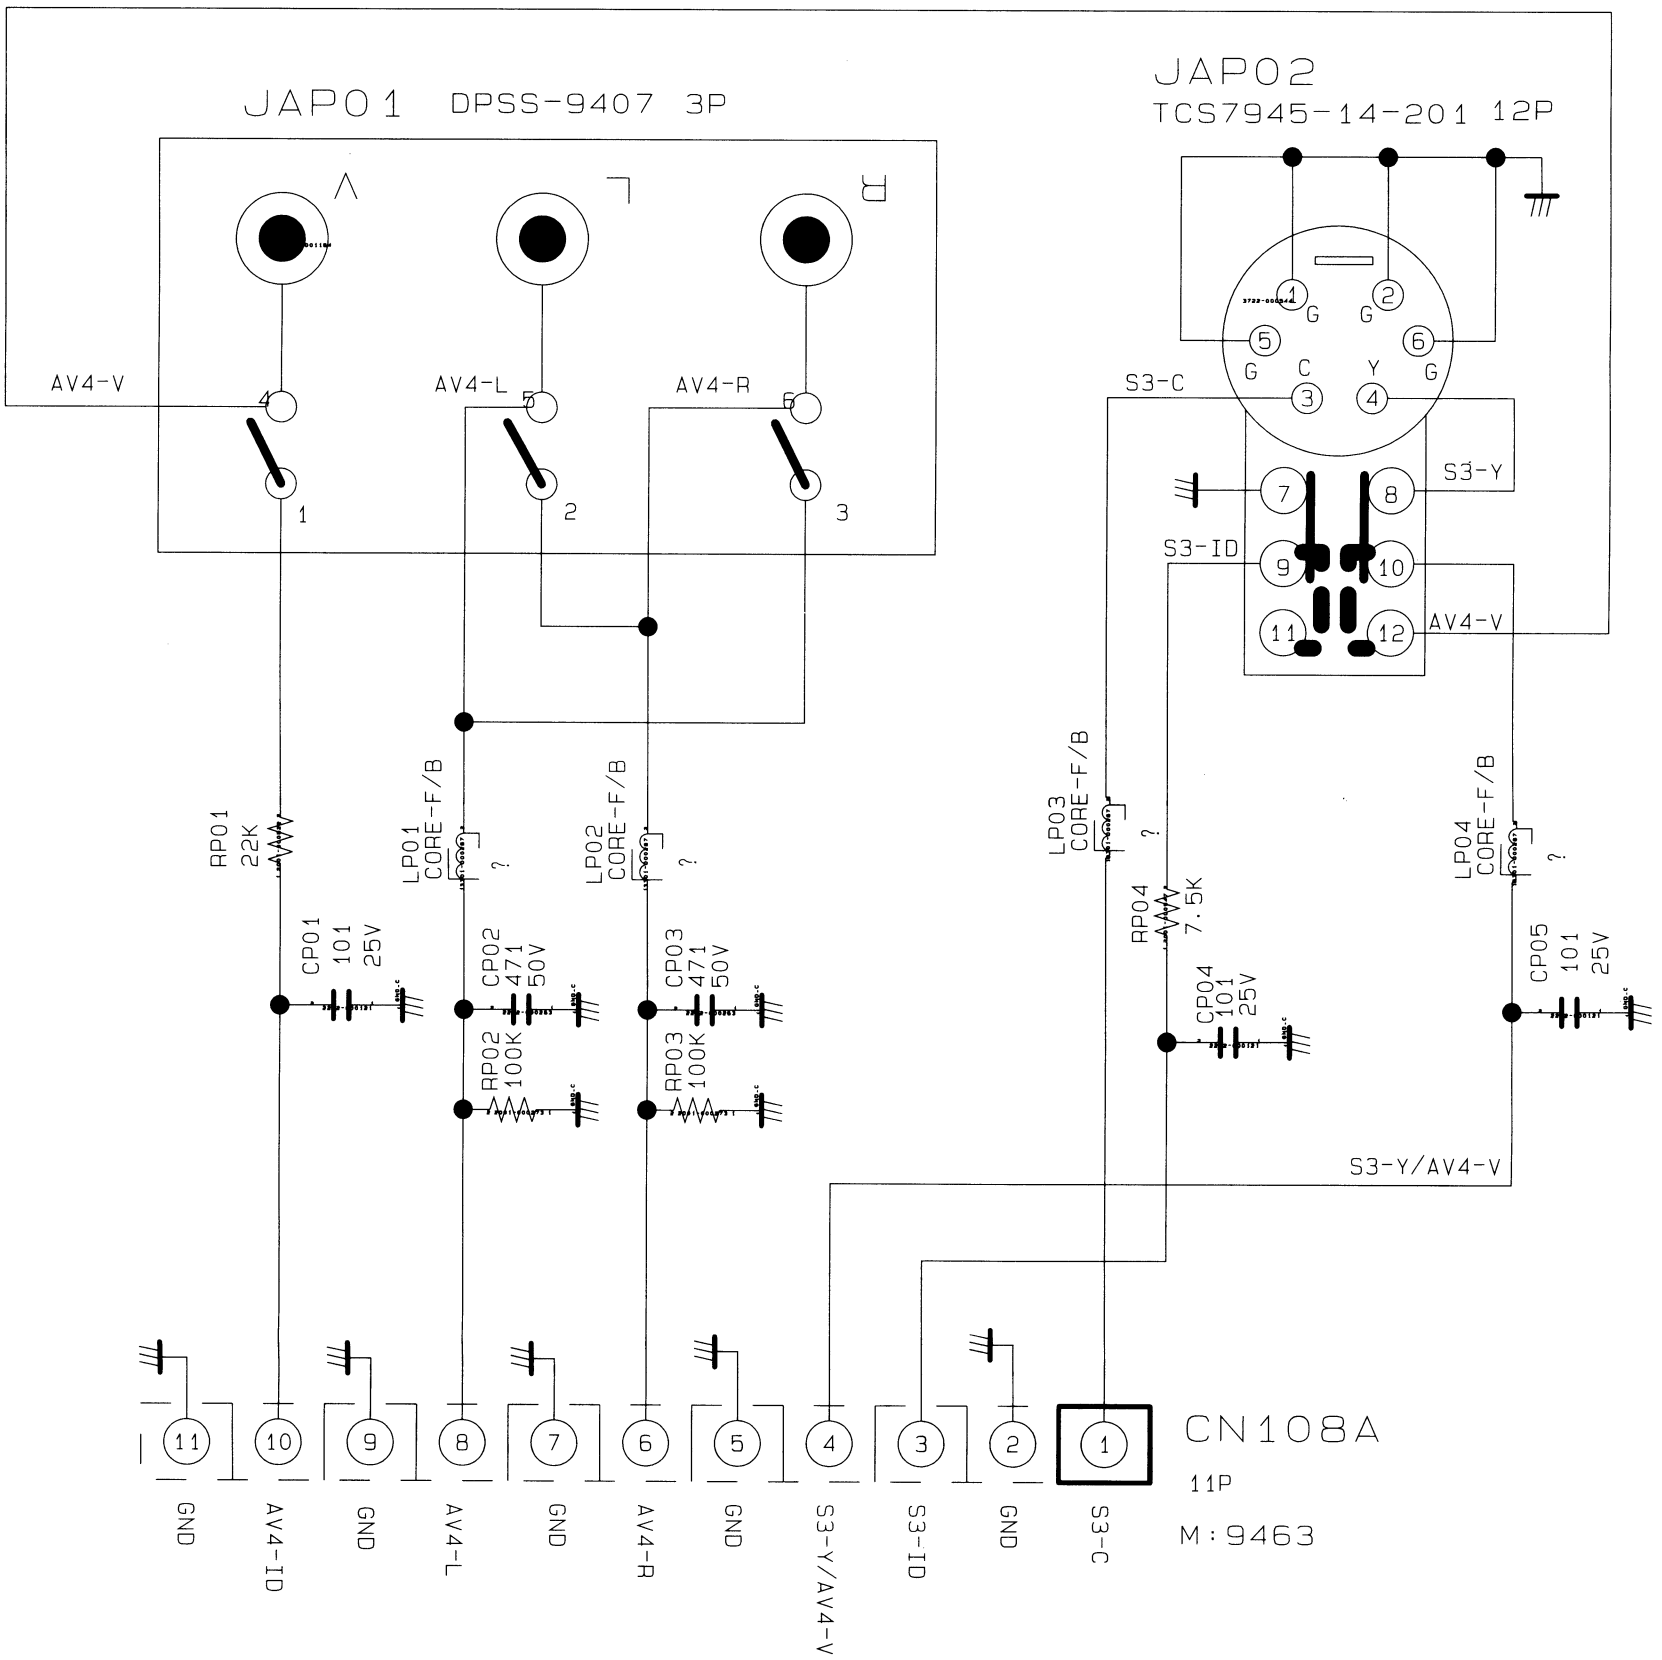

FROM SIDE-A/V(AV4)

This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.

AV-SIDE(AV4)

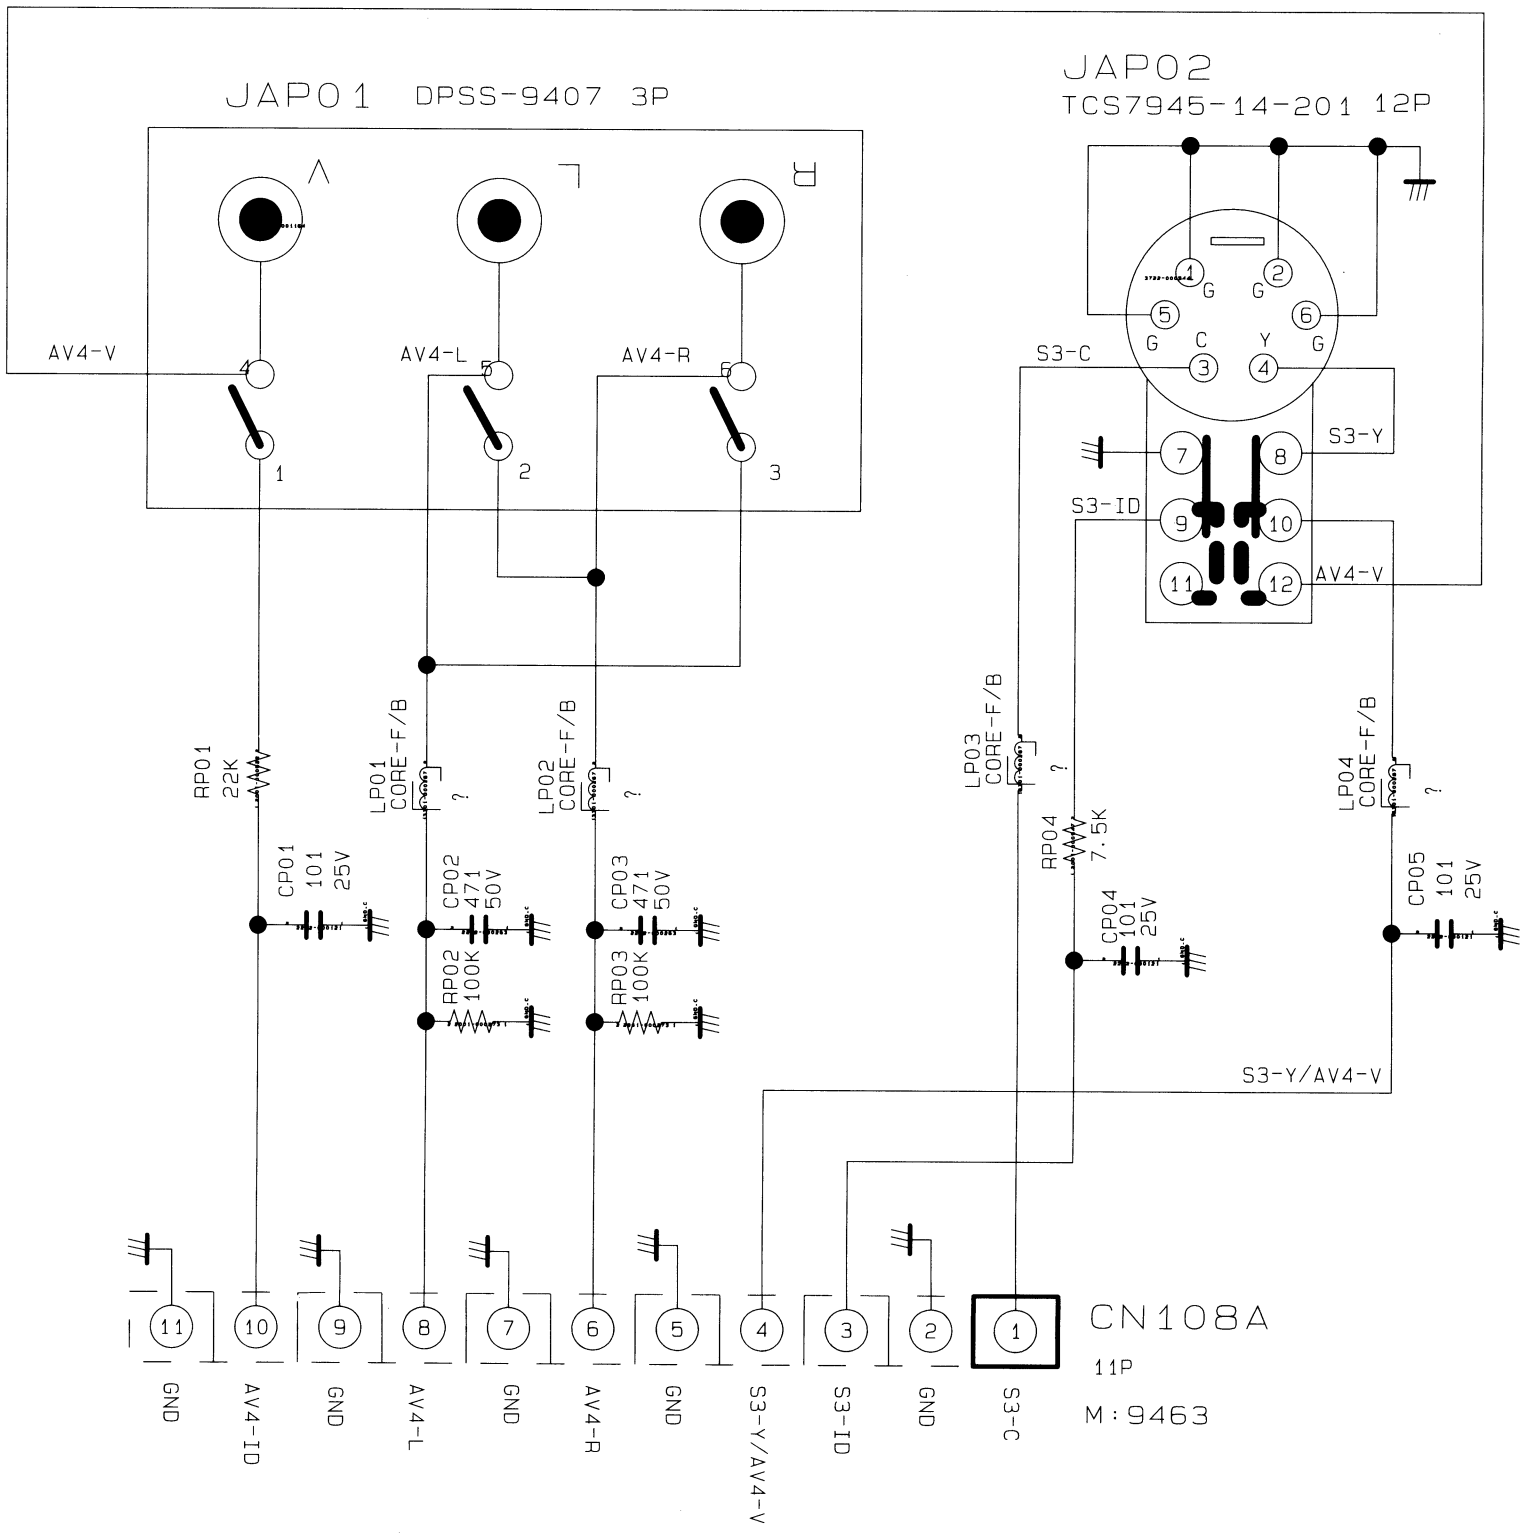

FROM SIDE-A/V(AV4)